

Wire Rope Cutters



RC type

Blade of special material, drop-forged and high-frequency treated.
A sharp cutting tool for even thin wires without spreading cutting-faces.



RC-8(B)



RC-450

Spare blade



RCJ-450



★RC-8(B):Blister-pack

Item No.	Over all Length(mm)	Cutting Capacity dia.(mm)	Net Weight 1pce (kg)	Q'ty/ CTN	Packing Weight 1carton (kg)	M 3
RC-8(B)	195	5	0.3	60	22.3	0.04501
RC-450	470	12	1.5	12	20.3	0.04185
RC-800	800	16	3.9	4	17.7	0.03400

Item No.	Net Weight 1pce (kg)	Q'ty/ CTN
RCJ-450	0.5	20
RCJ-800	1.3	10

WR type

Blade of special material, drop-forged and high-frequency treated.
A sharp cutting tool for wires without spreading cutting-faces.
WR-10BB : Suitable for large volume of cutting wire rope.



WR-10



WR-10BB

Spare blade



WRJ-10



Item No.	Over all Length(mm)	Cutting Capacity dia.(mm)	Net Weight 1pce (kg)	Q'ty/ CTN	Packing Weight 1carton (kg)	M 3
WR-6	350	6	0.9	12	12.0	0.01900
WR-10	590	10	2.3	6	15.4	0.03739
WR-14	750	14	3.6	6	24.7	0.05688
WR-16	900	16	5.3	4	23.8	0.06720
WR-20	1066	20	8.2	3	26.9	0.06336
WR-10BB	540	10	5.0	4	24.0	0.10157

Item No.	Net Weight 1pce (kg)	Q'ty/ CTN
WRJ-6	0.3	24
WRJ-10	0.7	6
WRJ-14	1.2	6
WRJ-16	1.6	4
WRJ-20	2.7	3

Cable Cutters



A must have professional tool for cutting rubber coated copper and aluminium cables.
A sharp cutting tool for cable wires without spreading cutting-faces.



KC-450

Spare blade



KCJ-450



Item No.	Over all Length(mm)	Cutting Capacity dia.(mm)	Net Weight 1pce (kg)	Q'ty/ CTN	Packing Weight 1carton (kg)	M 3
KC-450	475	25	1.4	12	20.1	0.04185
KC-800	810	50	3.6	4	16.2	0.03400

Item No.	Net Weight 1pce (kg)	Q'ty/ CTN
KCJ-450	0.5	20
KCJ-800	1.0	10



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



**Electric
Cordless**

Re-bar Cutters



This can cut **dia. 16mm (5/8")** Re-ber

Electric

TC16-120V / TC16-230V

Electric Re-bar Cutter (Hydraulic function)

Cutting Speed : 4seconds



☐ Double insulation

Size : 420mm(W) X 104mm(D) X 216mm(H)

Accessories

Spare Blade Set

Item No. TCCJ-16



Carry Case



Bolt Cutter

Hand held 350mm 1pce



Shoulder Strap

Spare Products

Product Name	Item No.	Weight
Spare Blade set	TCCJ-16	0.2kg

Cordless

TC16-MH120 / TC16-MH230

Cordless Re-bar Cutters (Hydraulic function)

Cutting Speed : 7seconds

Battery Output: 14.4V



**TC16-MH120/
TC16-MH230**

Size : 340mm(W) X 90mm(D) X 330mm(H)

Accessories

Carry Case



**Nickel-Metal Hydride
Battery (Ni-MH)**

DC14.4V
3000mAh



Battery charger

AC120V(TC16-MH120)



Battery charger

AC230V(TC16-MH230)



Spare Blade Set

Item No. TCCJ-16



Shoulder Strap

Spare Products

Product Name	Item No.	Weight
Spare Blade set	TCCJ-16	0.2kg
Nickel-Metal Hydride Battery	EB1430R	0.8kg
Battery charger [120V]	UC18YRL	0.7kg
Battery charger [230V]	UC24YC	1.1kg

With fully charged battery cuts

	TC16-MH120 / TC16-MH230
Dia.16mm(5/8") re-bar	80 times
Dia.13mm(1/2") re-bar	125 times



Stability insured!! (PAT.P)

New attachment surely prevent wrong angle against rebar and blade.
This function will surely avoid any accident, trouble that are occurring from wrong angle of cutting material.

◆Head turns around : Head turns 180 degrees in 45 degrees steps.

Electric

Item No.	Electrical input	Electricity	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
TC16-120V	AC120V	7.0A	16 (5/8")	6.7kg	13kg	0.056
TC16-230V	AC230V	3.6A				
Item No.	Battery / Electrical input	Charging time	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
TC16-MH120	14.4V 3000mAh(Ni-MH) / AC120V	45 minutes	16 (5/8")	5.8kg	9.7kg	0.063
TC16-MH230	14.4V 3000mAh(Ni-MH) / AC230V	37 minutes				

Cordless



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL : + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



**Electric
Cordless**

Wire Rope Cutters

ARM

MADE IN JAPAN

This can cut dia. **20mm (3/4")**
Steel Core Wire rope, **IWRC 6 X Fi(29)**

Electric

WRC20-120V/ WRC20-230V Electric Wire Rope Cutter (Hydraulic function)

Cutting Speed : 4seconds



☐ Double insulation

Size : 420mm(W) X 104mm(D) X 216mm(H)

Accessories

Wire rope cutter RC-450

Cutting capacity dia. 12mm(1/2")
fiber core wire rope



Carry Case



Shoulder Strap

Cordless

WRC20-MH120/ WRC20-MH230 Cordless Wire Rope Cutters (Hydraulic function)

Cutting Speed : 7seconds

Battery Output:14.4V



WRC20-MH120/
WRC20-MH230

Size : 350mm(W) X 90mm(D) X 340mm(H)

With fully charged battery cuts

Dia.20mm(3/4")
Fiber core wire rope

WRC20-MH120 / WRC20-MH230

60 times

Accessories

Carry Case



Nickel-Metal Hydride Battery (Ni-MH)

DC14.4V
3000mAh



Battery charger AC120V



Battery charger AC230V



Wire rope cutter RC-450

Cutting capacity dia. 12mm(1/2")
fiber core wire rope



Shoulder Strap

Spare Products

Product Name	Item No.	Weight
Nickel-Metal Hydride Battery	EB1430R	0.8kg
Battery charger [120V]	UC18YRL	0.7kg
Battery charger [230V]	UC24YC	1.2kg

Cutting Wire Rope



Blades

Powder high speed steel with Titanium coating.

Output pressure

10tonf Safety-valve will be automatically operated, when the pressure is over 10tonf.

Head turns around

Head turns 180 degrees.

Item No.	Electrical input	Electricity	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
WRC20-120V	AC120V	7.0A	20 (3/4")	7.1kg	13kg	0.056
WRC20-230V	AC230V	3.6A				
Item No.	Battery / Electrical input	Charging time	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
WRC20-MH120	14.4V 3000mAh(Ni-MH) / AC120V	45 minutes	20 (3/4")	6.3kg	14.3kg	0.063
WRC20-MH230	14.4V 3000mAh(Ni-MH) / AC230V	37 minutes				

Electric

Cordless



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



**Electric
Cordless**

Bolt Cutters

ARM®

MADE IN JAPAN

This can cut tempered steel bars **dia. 16mm(5/8")** upto **HRC 30**.

Electric

BC16-120V/ BC16-230V

Electric Bolt Cutter (Hydraulic function)

Cutting Speed : 4seconds



☐ Double insulation

Size : 435mm(W) X 104mm(D) X 247mm(H)

Accessories

Spare Blade Set

Item No. BCCJ-16



Bolt Cutter

Hand held 350mm 1pce



Carry Case



Hand Protector

Comes with Spanner, attachment bolt



Shoulder Strap

Spare Products

Product Name	Item No.	Weight
Spare Blade set	BCCJ-16	0.2kg

Cordless

BC16-MH120/ BC16-MH230 Cordless Bolt Cutters (Hydraulic function)

Cutting Speed : 7seconds

Battery Output:14.4V



BC16-MH120 / BC16-MH230

Size : 360mm(W) X 90mm(D) X 330mm(H)

With fully charged battery cuts

	BC16-MH120 / BC16-MH230
Dia.16mm(5/8") re-bar	75 times
Dia.13mm(1/2") re-bar	110 times

Accessories

Carry Case



Nickel-Metal Hydride Battery (Ni-MH)

DC14.4V 3000mAh



Battery charger

AC120V(BC16-MH120)



Battery charger

AC230V(BC16-MH230)



Spare Blade Set

Item No. BCCJ-16



Hand Protector

Comes with Spanner, attachment bolt



Shoulder Strap

Spare Products

Product Name	Item No.	Weight
Spare Blade set	BCCJ-16	0.2kg
Nickel-Metal Hydride Battery	EB1430R	0.8kg
Battery charger (Ni-MH) 【120V】	UC18YRL	0.7kg
Battery charger (Ni-MH) 【230V】	UC24YC	1.1kg



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



Usage of Bolt Cutters

Cutting capacity of Hoist Chain



Chain Grade	Diameter
40	13mm 1/2"
70	13mm 1/2"
80	10mm 3/8"
100	10mm 3/8"

Cutting Container Seal



Cutting Re-bar



Blades

Powder high speed steel with Titanium coating.

Output pressure

11tonf

Safety-valve will be automatically operated, when the pressure is over 11tonf.

Head turns around

Head turns 180 degrees in 45 degrees steps.

Electric	Item No.	Electrical input	Electricity	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
	BC16-120V	AC120V	7.0A	16 (5/8")	8.1kg	14.5kg	0.056
	BC16-230V	AC230V	3.6A				
Cordless	Item No.	Battery / Electrical input	Charging time	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
	BC16-MH120	14.4V 3000mAh(Ni-MH) / AC120V	45 minutes	16 (5/8")	7.1kg	12kg	0.063
	BC16-MH230	14.4V 3000mAh(Ni-MH) / AC230V	37 minutes				






















PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



Size chart of ARM Oval Sleeve and ARM Swager.

Wire Rope Dia. mm inch	1.5	2.0	2.5	2.8	3.0	3.5	4.0	5.0	6.0	8.0	9.0	10.0	12.0
	1/16"	5/64"	3/32"	7/64"	1/8"	-	5/32"	3/16"	1/4"	5/16"	3/8"	13/32"	1/2"
ARM Oval Sleeves	OS-1A 	OS-1B 	OS-2A 	OS-2B 	OS-3A 	OS-3B 	OS-4A 	OS-5A 	OS-6A 	OS-8A 	OS-9A 	OS-10A 	OS-12A 
Appropriate Swager	 Swaging capacity: OS-1A - OS-3B HSC-350						Can not swage from OS-4A to OS-12A						
	 Swaging capacity: OS-1A - OS-5A HSC-600						Can not swage from OS-6A to OS-12A						
	 Swaging capacity: OS-1A - OS-5A HSC-600BB						Can not swage from OS-6A to OS-12A						
	Can not swage from OS-1A to OS-5A						 Swaging capacity: OS-6A/8A HS-1000	Can not swage from OS-9A to OS-12A					
	Can not swage from OS-1A to OS-5A						 Swaging capacity: OS-6A - OS-12A HS12-MH120 / HS12-MH230						
	Can not swage from OS-1A to OS-5A						 Swaging capacity: OS-6A - OS-12A HS12-120V / HS12-230V						

ARM Oval Sleeves



Checking point for Item No.

OS-3 A

A : line on one side
B : line on both sides

Indicating the number of line on side of body, which should be equivalent to the Hole No. for HSC Swager.













3-line on both sides
OS-3B

3-line on one side
OS-3A

Hole No.



Item No.	Wire Rope Dia.		Sleeve	Hole No.	Safety load using 2 wire ropes			Wire Rope destruction Load (Using ARM Oval Sleeve.)	Q'ty/ Bag (PCS)	Net Weight 1 Bag (kg)	Q'ty/ CTN (Bag)	Packing Weight 1 carton (kg)	M 3
	mm	inch			 Safety Load	 Safety Load	 Safety Load						
OS-1A	1.5	1/16"		①	56kg less	54kg less	48kg less	210kg	30	0.03	120	5.5	0.02052
OS-1B	2	5/64"		②	96kg less	92kg less	82kg less	330kg	30	0.03	120	5.0	0.02052
OS-2A	2.5	3/32"		③	152kg less	148kg less	132kg less	519kg	20	0.06	120	8.5	0.02867
OS-2B	2.8	7/64"		④	182kg less	176kg less	158kg less	630kg	20	0.05	120	7.6	0.02867
OS-3A	3	1/8"		⑤	220kg less	212kg less	190kg less	690kg	20	0.11	60	7.8	0.02228
OS-3B	3.5	-		⑥	280kg less	270kg less	242kg less	1,001kg	20	0.10	60	7.1	0.02228
OS-4A	4	5/32"		⑦	282kg less	272kg less	244kg less	1,204kg	20	0.13	60	9.5	0.03097
OS-5A	5	3/16"		⑧	446kg less	430kg less	386kg less	1,731kg	20	0.18	60	12.9	0.04111



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



Hand Swagers



Arm swaging tools and arm oval sleeves must be used in combination set.

Produce rigging wire rope easily at any place!



HSC-350

Cutting capacity : 3.5mm(1/8")
Swaging capacity : 1.5mm - 3.5mm (1/16" - 1/8")



HSC-600BB (Bench type)

Cutting capacity : 5mm(3/16")
Swaging capacity : 1.5mm - 5mm (1/16" - 3/16")
Suitable for large volume works



HSC-600

Cutting capacity : 5mm(3/16")
Swaging capacity : 1.5mm - 5mm (1/16" - 3/16")



Cut



Swage



Useful in two ways, swaging and cutting.
The jaw itself has a wire rope cutting function.

How to swage

1 Cut a wire rope.



2 Thread wire rope through oval sleeve.



Proper way of swaging sleeve

3 Loop the wire rope from eyelet.





Swaging time per sleeve


4 Decide length of wire rope eyelet.



5 Swage oval sleeve.



Check swaging.



Warning

ARM swaging tools and ARM oval sleeves must be used in combination set.

Do not use any other sleeves with ARM swaging tools.

Swage naked wire rope when wire rope is vinyl coated. Otherwise, wire rope will be slipped off from swaged sleeve when swaging vinyl coating.

Item No.	Over all Length(mm)	Wire Rope Dia. in Capacity mm (inch)	Net Weight 1pce (kg)	Q'ty/CTN	Packing Weight 1carton (kg)	M 3
HSC-350	430	1.5 2.0 2.5 2.8 3.0 3.5 (1/16" 5/64" 3/32" 7/64" 1/8" -)	1.1	12	15.3	0.04185
HSC-600	650	1.5 2.0 2.5 2.8 3.0 3.5 4.0 5.0 (1/16" 5/64" 3/32" 7/64" 1/8" - 5/32" 3/16")	2.5	6	18.2	0.03819
HSC-600BB	540	1.5 2.0 2.5 2.8 3.0 3.5 4.0 5.0 (1/16" 5/64" 3/32" 7/64" 1/8" - 5/32" 3/16")	5.2	4	25.2	0.10157



PAVLÍNEK
VÁZACÍ PROSTŘEDKY


EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



ARM Oval Sleeves



HS-1000 Swage Oval Sleeve, following to wire rope dia.




OS-6A SLEEVE
6mm (1/4")
OS-6A

OS-8A SLEEVE
8mm (5/16")
OS-8A









Swaged sleeve & wire rope (OS-9A)



HS12-MH100 / HS12-100V Suitable Sleeve & Dies



Suitable Dies	Oval Sleeve	Wire rope Dia. mm (inch)
OS-6D	OS-6A	6 (1/4")
OS-8D	OS-8A	8 (5/16")
OS-9D&10D	OS-9A	9 (3/8")
OS-9D&10D	OS-10A	10 (13/32")
OS-12D	OS-12A	12 (1/2")

Item No.	Wire Rope Dia.		Sleeve	Safety load using 2 wire ropes			Wire Rope destruction Load (Using ARM Oval Sleeve.)	Q'ty/ Box (PCS)	Net Weight 1Box (kg)	Q'ty/ CTN (Boxes)	Packing Weight 1carton (kg)	M 3
	mm	inch		 Safety Load	 30deg. Safety Load	 60deg. Safety Load						
OS-6A	6	1/4"		556kg less	536kg less	480kg less	1,975kg	20	0.3	10	3.2	0.00445
OS-8A	8	5/16"		990kg less	956kg less	856kg less	3,284kg	20	0.5	10	5.0	0.00669
OS-9A	9	3/8"		1,250kg less	1,206kg less	1,082kg less	4,018kg	20	1.0	10	9.7	0.01129
OS-10A	10	13/32"		1,546kg less	1,494kg less	1,338kg less	5,365kg	20	0.9	10	9.2	0.01129
OS-12A	12	1/2"		2,226kg less	2,150kg less	1,926kg less	7,456kg	20	1.8	10	18.3	0.01980



Warning

ARM swaging tools and ARM oval sleeves must be used in combination set.

Do not use any other sleeves with ARM swaging tools.


Swage naked wire when wire rope is vinyl coated. Otherwise, wire rope will be slipped off from swaged sleeve when swaging vinyl coating.

Hand Swagers



Produce rigging wire rope easily by manual operation. (Φ6mm 1/4" , Φ8mm 5/16")

HS-1000 Swaging capacity : 6mm • 8mm (1/4" • 5/16")
No cutting function

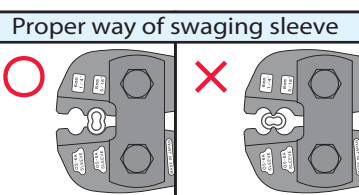

Item No.	Over all Length(mm)	Wire Rope Dia. in Capacity mm (inch)		Net Weight 1pce (kg)	Q'ty/ CTN	Packing Weight 1carton (kg)	M 3
HS-1000	1010	6.0 (1/4")	8.0 (5/16")	7.5	3	24.3	0.04784



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



Electric
Cordless

Swagers



Arm swaging tools and arm oval sleeves must be used in combination set.

Making rigging wire rope, dia. **6mm - 12mm** (1/4" - 1/2")

Electric

HS12-120V / HS12-230V

Electric Swager (Hydraulic function)

Swaging Speed : 4seconds



Double insulation



Size : 433mm(W) X 104mm(D) X 243mm(H)

Accessories

Carry Case



Each size of dies



Shoulder Strap

Screwdriver
for replacing die

Wire rope cutter RC-450

Cutting capacity dia. 12mm (1/2")
fiber core wire rope



Gauge
to ensure swaging



Cordless

HS12-MH120 / HS12-MH230

Cordless Swager (Hydraulic function)

Swaging Speed : 7seconds

Battery Output: 14.4V



Size : 355mm(W) X 90mm(D) X 350mm(H)

Accessories

Carry Case



Nickel-Metal Hydride
Battery (Ni-MH)

DC14.4V
3000mAh



Each size of dies



Gauge
to ensure swaging



Battery charger

AC120V(HS12-MH120)



Battery charger

AC230V(HS12-MH230)



Shoulder Strap

Wire rope cutter RC-450

Cutting capacity dia. 12mm (1/2")
fiber core wire rope



Screwdriver
for replacing die

Suitable Sleeve & Dies Swaging times per fully charged battery

Wire rope Dia. mm (inch)	Oval Sleeve	Suitable Dies	HS12-MH120 HS12-MH230 Swaging times
6 (1/4")	OS-6A	OS-6D	144 times
8 (5/16")	OS-8A	OS-8D	108 times
9 (3/8")	OS-9A	OS-9D&10D	75 times
10 (13/32")	OS-10A	OS-9D&10D	75 times
12 (1/2")	OS-12A	OS-12D	39 times

Spare Products

Product Name	Item No.	Weight
Dies [6mm (1/4")]	OS-6D	0.5kg
Dies [8mm (5/16")]	OS-8D	0.5kg
Dies [9mm (3/8"), 10mm (13/32")]	OS-9D&10D	0.5kg
Dies [12mm (1/2")]	OS-12D	0.5kg
Nickel-Metal Hydride Battery	PHT-EB1430H	0.8kg
Battery charger [120V]	UC18YRL	0.7kg
Battery charger [230V]	UC18YRL	0.7kg




Output
pressure

HS12-120V / HS12-230V : 11tonf
HS12-MH120 / HS12-MH230 : 10tonf
Safety-valve will be automatically
operated, when the pressure is over 10tonf or


Head turns
around

Head turns 180 degrees in 45 degrees steps.

Swaging position



3 point swaging



Electric

Item No.	Electrical input	Electricity	Wire rope dia. mm (inch)	Weight	Packing weight	M 3
HS12-120V	AC120V	7.0A	6, 8, 9, 10, 12	7.5kg	18kg	0.056
HS12-230V	AC230V	3.6A	(1/4", 5/16", 3/8", 13/32", 1/2")			

Cordless

Item No.	Battery / Electrical input	Charging time	Wire rope dia. mm (inch)	Weight	Packing weight	M 3
HS12-MH120	14.4V 3000mAh(Ni-MH) / AC120V	45 minutes	6, 8, 9, 10, 12	6.5kg	15.5kg	0.063
HS12-MH230	14.4V 3000mAh(Ni-MH) / AC230V		(1/4", 5/16", 3/8", 13/32", 1/2")			



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511





Hand Swager Oval Sleeve (Aluminum)

NEW PRODUCT

Hand-operated swager with cutter
HSC-23

Wire rope dia. 1.5mm (1/16")
2.0mm (5/64")

Swage

Cut



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



Hand Swagers



HSC-23

Cutting capacity : 2.0mm(5/64")

Swaging capacity : 1.5mm / 2.0mm (1/16" / 5/64")

NEW PRODUCT



Check sleeve
correctly swaged



Product Safety

Important product safety information:

- ARM-brand oval sleeves and swagers are designed and manufactured to be used together.
- We will not guarantee the use of other (non-ARM) brand sleeves/swagers with our products, and strongly advise against it.
- When swaging vinyl-sheathed wire rope, always retract sheathing to reveal wire rope before proceeding to swage. Otherwise, hanging strength can not be guaranteed.
- Refer to the specific oval sleeve technical data for detailed information relating to safety/destruction loads.

Item No.	Over all Length(mm)	Wire Rope Dia. in Capacity mm (inch)		Net Weight 1pce (kg)	Q'ty/ CTN	Packing Weight 1carton (kg)	M 3
HSC-23	230	1.5 (1/16")	2.0 (5/64")	0.36	12	6.00	0.006

ARM Oval Sleeves



Checking point for Item No.

OS-1 A






A : line on one side
B : line on both sides

Indicating the number of line on side of body, which should be equivalent to the Hole No. for HSC Swager.

OS-1 B

3-line on both sides
3-line on one side
OS-1 A



Item No.	Wire Rope Dia.		Sleeve	Safety load using 2 wire ropes			Wire Rope destruction Load (Using ARM Oval Sleeve.)	Q'ty/ Bag (PCS)	Net Weight 1Bag (kg)	Q'ty/ CTN (Bag)	Packing Weight 1carton (kg)	M 3
	mm	inch		 Safety Load	 30deg. Safety Load	 60deg. Safety Load						
OS-1A	1.5	1/16"		56kg less	54kg less	48kg less	210kg	30	0.03	120	5.5	0.02052
OS-1B	2	5/64"		96kg less	92kg less	82kg less	330kg	30	0.03	120	5.0	0.02052



EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

PAVLÍNEK
VÁZACÍ PROSTŘEDKY



Hydraulic Swager Oval Sleeve (Aluminum)

NEW PRODUCT

Hand-operated hydraulic swager
Item No. HS-12HB (Hydraulic function)

**Manually operated-
mains and battery free**



Output pressure: 12tonf



PAVLÍNEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



Swagers




Hand-operated hydraulic function, HS-12HB

Capacity : wire rope diameter
6(1/4"), 8(5/16"), 9(3/8"), 10(13/32"), 12(1/2")
Output pressure : 12tonf

NEW PRODUCT

Manually operated- mains and battery free

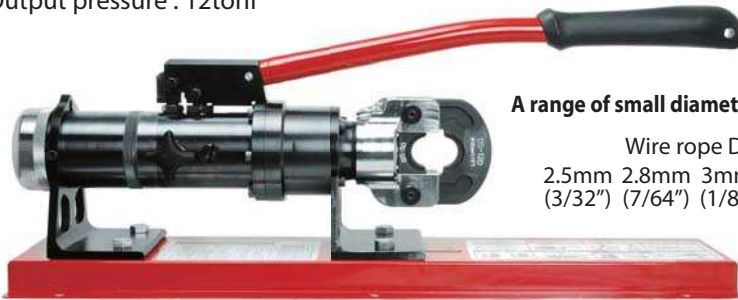

A range of small diameter dies are available.

Wire rope Diameter
2.5mm 2.8mm 3mm 4mm 5mm
(3/32") (7/64") (1/8") (5/32") (3/16")



Accessories

Dies, see table
Wire rope cutter (for fiber core wire rope)
Gauge for checking sleeves are correctly swaged
Shoulder strap
Screwdriver (for replacing dies)



Matching dies and sleeve

Dies	Oval sleeve
OS-6D	OS-6A
OS-8D	OS-8A
OS-9D&10D	OS-9A
	OS-10A
OS-12D	OS-12A



Wire rope cutter



Gauge



Item No.	Recommended wire rope mm (inch)	Output	Weight (main item)	Packing weight	M3
HS-12HB	6, 8, 9, 10, 12 (1/4", 5/16", 3/8", 13/32", 1/2")	12tonf (117KN)	15.5	25.1	



Product Safety

Important product safety information:

- ARM-brand oval sleeves and swagers are designed and manufactured to be used together.
- We will not guarantee the use of other (non-ARM) brand sleeves/swagers with our products, and strongly advise against it.
- When swaging vinyl-sheathed wire rope, always retract sheathing to reveal wire rope before proceeding to swage. Otherwise, hanging strength can not be guaranteed.
- Refer to the specific oval sleeve technical data for detailed information relating to safety/destruction loads.


ARM Oval Sleeves



Swaged sleeve
& wire rope
(OS-9A)



HS-12HB Matching dies and sleeves



Dies	Oval Sleeve	Wire rope Dia. mm (inch)
OS-6D	OS-6A	6 (1/4")
OS-8D	OS-8A	8 (5/16")
OS-9D&10D	OS-9A	9 (3/8")
OS-9D&10D	OS-10A	10 (13/32")
OS-12D	OS-12A	12 (1/2")

Item No.	Wire Rope Dia.		Sleeve	Safety load using 2 wire ropes			Wire Rope destruction Load (Using ARM Oval Sleeve.)	Q'ty/ Box (PCS)	Net Weight 1Box (kg)	Q'ty/ CTN (Boxes)	Packing Weight 1carton (kg)	M 3
	mm	inch		Safety Load	30deg. Safety Load	60deg. Safety Load						
OS-6A	6	1/4"		556kg less	536kg less	480kg less	1,975kg	20	0.3	10	3.2	0.00445
OS-8A	8	5/16"		990kg less	956kg less	856kg less	3,284kg	20	0.5	10	5.0	0.00669
OS-9A	9	3/8"		1,250kg less	1,206kg less	1,082kg less	4,018kg	20	1.0	10	9.7	0.01129
OS-10A	10	13/32"		1,546kg less	1,494kg less	1,338kg less	5,365kg	20	0.9	10	9.2	0.01129
OS-12A	12	1/2"		2,226kg less	2,150kg less	1,926kg less	7,456kg	20	1.8	10	18.3	0.01980



EMAIL: OBCHOD@PAVLÍNEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
VÁZACÍ PROSTŘEDKY IČ: 25358511 DIČ: CZ25358511

