



**HYDRAULIC
CYLINDERS**

COMPOSING A HYDRAULIC CYLINDER SYSTEM

3-step plan for composing a hydraulic cylinder system

Step 1

Select one or more cylinders

- Considerations:
- What is the weight of the load to be lifted?
 - What is the total recommended cylinder capacity?
 - With how many cylinders must/can the load be lifted?
 - What capacity for each cylinder is required then?
 - What is the required stroke length of the cylinder?
 - What is the required closed height (overall dimensions) of the cylinder?
 - How must the plunger return; gravity, spring or hydraulic?
 - Is lifting in one or more steps possible?

See 'Selection list cylinders'

Step 2

Select the proper pump

Considerations:

- Select from hand, foot, pneumatically, electrically, petrol or diesel driven pumps.
- Hand / foot pumps: with a double-acting cylinder (hydraulic return), mount a double-acting valve on your hand pump (only possible with PA *8 models).
- Vari pumps: dependent on whether you use a single- or double-acting cylinder, mount a single-acting or double-acting valve on the Vari pump.
- What minimum tank volume of the pump is required?
- Select a pump output corresponding with the required operating speed.

See section 'Hydraulic pumps'

Step 3

Select the accessories you need





Considerations:

- Choose the correct number of hoses that you need and the required length. Take the required (safe) distance between cylinders and operation (pump and/or valve block) into account.
- When the system contains several cylinders controlled by one pump, we recommend you to install a FlowPanel between the cylinders and the pump for accurate control of the oil flow to the cylinders.
- Select any necessary couplers, pressure gauges, valves and/or assembly material.

See section 'System components'

Four examples of a hydraulic cylinder system

no	description	art no	page
1	hand pump PA 18 H 2	100.142.035	80
2	pressure gauge set for PA *8 pumps	100.182.214	103
3	hydraulic hose H 2 SOU	100.572.102	98
4	single-acting cylinder	-	14
5	hydraulic hose VL 5 SOU	100.572.305	99
6	valve block HMS 4 C	100.172.047	104
7	High Flow coupler, female, A 118	100.181.118	100
8	High Flow coupler, male, A 119	100.181.119	100
9	nipple 3/8" NPT, male	100.581.101	110
10	T-piece	100.001.010	107
11	manifold	100.181.125	108

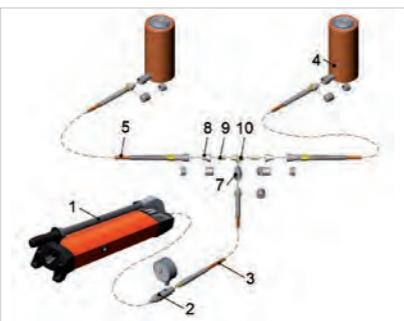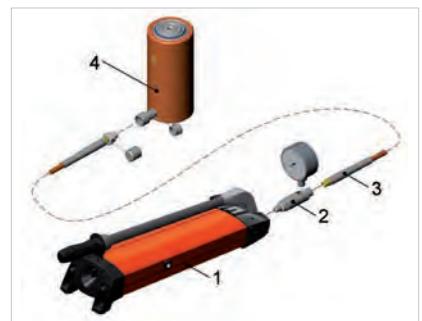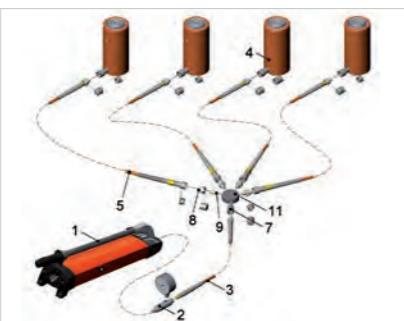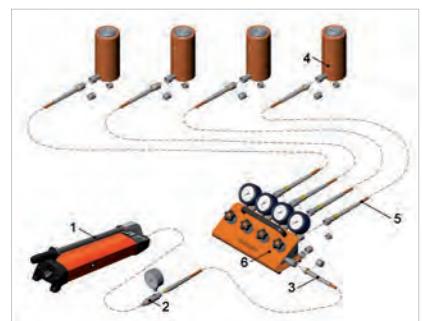


**ANY QUESTIONS?
OUR SALES DEPARTMENT
IS HAPPY TO ASSIST!**

HOLMATRO CYLINDERS


Various return types

The Holmatro product range includes over 200 different cylinders in 10 different types and 3 different return types. A short explanation about the standard return types and the models will be given below.




Gravity return

Return of the plunger by means of the load or another external force.



Spring return

Return of the plunger by means of a spring integrated in the cylinder.



Hydraulic return

Return of the plunger by means of hydraulic pressure. Cylinders in which the plunger hydraulically extends and returns are also called 'double-acting' cylinders.

Various cylinder types



Multi Purpose cylinders - spring return

With a lifting capacity of 5 up to 100 tons and a stroke length varying between 25 and 450 mm the Multi Purpose cylinder range is the most extensive on the market and suitable for the most varied applications. The cylinders are fitted with base mounting holes and collar thread. There is also internal plunger thread on all models to 50 tons.



Aluminium cylinders - spring & hydraulic return

The Aluminium cylinders combine the best of two worlds; They are more than 50% lighter, but are just as robust as their steel equivalent. With a lifting capacity of 20 up to 150 tons and a stroke length varying between 50 and 300 mm the cylinder range is very suitable for lifting activities requiring frequently moving the cylinder, making a low weight essential.



Flat cylinders - spring return

Cylinders with a very low construction height and a lifting capacity of 5 up to 150 tons. Especially developed in case of limited insertion space.



Short Stroke cylinders - spring return

Cylinders with a short stroke, a low construction height and a lifting capacity of 10 up to 100 tons. Very suitable for general lifting activities.



Telescopic cylinders - gravity return

Cylinders with a very low construction height, two different capacities and stroke lengths in one cylinder. Very suitable for various adjustment activities.



High Tonnage cylinders - gravity & hydraulic return

Cylinders with a lifting capacity of 50 up to 500 tons and a stroke length varying between 50 and 300 mm. Very suitable for heavy lifting activities.



Locknut cylinders - gravity & hydraulic return

Cylinders with mechanical load locking, a lifting capacity of 10 up to 500 tons and a stroke length of 50, 150 or 300 mm. Because of the smart return-plunger the hydraulic return locknut cylinders are hardly higher than the gravity return locknut cylinders. All suitable for sustained load because of mechanical load locking.



Construction cylinders - hydraulic return

Cylinders especially for use in combination with extension tubes and accessories, with a lifting capacity of 10 up to 25 tons and a stroke length varying between 150 and 250 mm. These cylinders can be extended using tubes. Various accessories are available. This cylinder type is also suitable for assembly into a construction.



Hollow Plunger cylinders - gravity, spring & hydraulic return


Cylinders with a hollow plunger for both pushing and pulling, with a capacity of 5 up to 110 tons and a stroke length varying between 25 and 150 mm. Especially developed for pulling using pulling rods.



Pulling cylinders - spring & hydraulic return

Cylinders with a pulling capacity of 11 up to 100 tons and a stroke length of 150 mm. Especially developed for, among other things, pulling heavy objects towards each other.



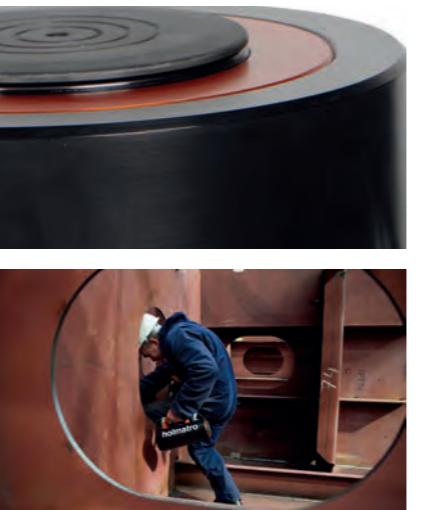

Features & benefits

- 50% lighter cylinders; easy to work with and better for the welfare of your employees
- Duo Power Ring; seal, bearing and resistance to lateral loads to a maximum of 10% for a longer life span
- The plunger is specially coated with a hardened anodised layer that makes it extremely wear and corrosion resistant
- The XL Saddle optimally protects the plunger and guides the load as effectively as possible
- All cylinders meet the stringent quality requirements that Holmatro enforces for its products
- A range of more than 12 models with different tonnages and stroke lengths
- Almost all cylinders have a handle

Standard supplied with

- High Flow female coupler A 118
- Flat saddle

Available on request

- Collar thread
- Base mounting holes
- Steel plate for protection of the cylinder bottom
- Cylinders manufactured in conformity with customer specifications

Additional information

Aluminium versus steel: aluminium cylinders offer an easy to handle alternative to steel. They should last a lifetime of use in average heavy duty lifting applications.

Tilting saddles	55
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

specifications	HAC 50 S 5	HAC 50 S 10	HAC 50 S 15	HAC 100 S 5	HAC 100 S 10	HAC 100 S 15
art no	100.112.271	100.112.270	100.112.263	100.112.273	100.112.272	100.112.264
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	50	50	50	100	100
stroke	mm	50	100	150	50	100
closed height	mm	183	233	283	225	275
diameter (B)	mm	130	130	130	189	189
capacity	kN/t	510.4 / 52	510.4 / 52	510.4 / 52	1030.6 / 105.1	1030.6 / 105.1
effective pressure area	cm ²	70.9	70.9	70.9	143	143
required oil content (effective)	cc	354	709	1063	716	1431
connection		A 118	A 118	A 118	A 118	A 118
cylinder type		standard	standard	standard	standard	standard
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		aluminium	aluminium	aluminium	aluminium	aluminium
weight, ready for use	kg	6.9	8.3	9.6	17.8	20.9
						24.1




EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



PAVLINEK
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



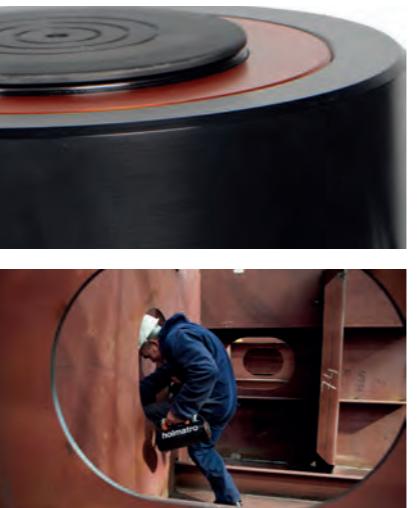

Features & benefits

- 50% lighter cylinders; easy to work with and better for the welfare of your employees
- Duo Power Ring; seal, bearing and resistance to lateral loads to a maximum of 10% for a longer life span
- The plunger is specially coated with a hardened anodised layer that makes it extremely wear and corrosion resistant
- The XL Saddle optimally protects the plunger and guides the load as effectively as possible
- All cylinders meet the stringent quality requirements that Holmatro enforces for its products
- A range of more than 24 models with different tonnages and stroke lengths
- Almost all cylinders have a handle

Standard supplied with

- High Flow female coupler A 118
- Flat saddle

Available on request

- Collar thread
- Base mounting holes
- Steel plate for protection of the cylinder bottom
- Cylinders manufactured in conformity with customer specifications

specifications	HAC 30 H 5	HAC 30 H 10	HAC 30 H 15	HAC 30 H 20	HAC 30 H 25	HAC 30 H 30
art no	100.122.086	100.122.085	100.122.080	100.122.079	100.122.103	100.122.060
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	30	30	30	30	30
stroke	mm	50	100	150	200	250
closed height	mm	197	247	297	347	397
diameter (B)	mm	125	125	125	125	125
capacity	kn/t	318.1 / 32.4	318.1 / 32.4	318.1 / 32.4	318.1 / 32.4	318.1 / 32.4
effective pressure area (press)	cm ²	44.2	44.2	44.2	44.2	44.2
effective pressure area (retract)	cm ²	11	11	11	11	11
required oil content (press)	cc	221	442	663	884	1105
required oil content (retract)	cc	55	110	165	220	275
connection		A 118				
cylinder type		standard	standard	standard	standard	standard
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		aluminium	aluminium	aluminium	aluminium	aluminium
weight, ready for use	kg	6.9	8.5	10.2	11.6	13.2
						14.7

Tilting saddles	55
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

Additional information

Aluminium versus steel: aluminium cylinders offer an easy to handle alternative to steel. They should last a lifetime of use in average heavy duty lifting applications.

specifications	HAC 50 H 5	HAC 50 H 10	HAC 50 H 15	HAC 50 H 20	HAC 50 H 25	HAC 50 H 30
art no	100.122.095	100.122.108	100.122.097	100.122.098	100.122.099	100.122.100
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	50	50	50	50	50
stroke	mm	50	100	150	200	250
closed height	mm	201	251	301	351	401
diameter (B)	mm	145	145	145	145	145
capacity	kN/t	510.4 / 52	510.4 / 52	510.4 / 52	510.4 / 52	510.4 / 52
effective pressure area (press)	cm ²	70.9	70.9	70.9	70.9	70.9
effective pressure area (retract)	cm ²	32.4	32.4	32.4	32.4	32.4
required oil content (press)	cc	354	709	1063	1418	1772
required oil content (retract)	cc	162	324	486	648	810
connection		A 118				
cylinder type		standard	standard	standard	standard	standard
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		aluminium	aluminium	aluminium	aluminium	aluminium
weight, ready for use	kg	9.5	11.5	13.3	15.4	17.4
						19.3

specifications	HAC 100 H 5	HAC 100 H 10	HAC 100 H 15	HAC 100 H 20	HAC 100 H 25	HAC 100 H 30
art no	100.122.094	100.122.109	100.122.107	100.122.088	100.122.089	100.122.090
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	100	100	100	100	100
stroke	mm	50	100	150	200	250
closed height	mm	246	296	346	396	446
diameter (B)	mm	195	195	195	195	195
capacity	kn/t	1030.6 / 105.1	1030.6 / 105.1	1030.6 / 105.1	1030.6 / 105.1	1030.6 / 105.1
effective pressure area (press)	cm ²	143.1	143.1	143.1	143.1	143.1
effective pressure area (retract)	cm ²	56.5	56.5	56.5	56.5	56.5
required oil content (press)	cc	716	1431	2147	2863	3579
required oil content (retract)	cc	283	565	848	1131	1414
connection		A 118				
cylinder type		standard	standard	standard	standard	standard
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		aluminium	aluminium	aluminium	aluminium	aluminium
weight, ready for use	kg	19.7	23.0	26.9	29.9	33.2
						36.6



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



SHORT STROKE CYLINDERS | spring return

specifications	HAC 150 H 5	HAC 150 H 10	HAC 150 H 15	HAC 150 H 20	HAC 150 H 25	HAC 150 H 30
art no	100.122.075	100.122.074	100.122.073	100.122.070	100.122.069	100.122.064
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	150	150	150	150	150
stroke	mm	50	100	150	200	250
closed height	mm	248	298	348	398	448
diameter (B)	mm	235	235	235	235	235
capacity	kN/t	1539.5 / 157	1539.5 / 157	1539.5 / 157	1539.5 / 157	1539.5 / 157
effective pressure area (press)	cm ²	213.8	213.8	213.8	213.8	213.8
effective pressure area (retract)	cm ²	91.1	91.1	91.1	91.1	91.1
required oil content (press)	cc	1069	2138	3207	4277	5346
required oil content (retract)	cc	456	911	1367	1822	2278
connection		A 118				
cylinder type		standard	standard	standard	standard	standard
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		aluminium	aluminium	aluminium	aluminium	aluminium
weight, ready for use	kg	27.7	32.3	38.0	41.5	46.1
						50.6



Features & benefits

- Compact, flat version, efficient in case of limited insertion space
- Usable in all positions
- Protected against ejection of the plunger
- Dirt scraper ring
 - Protects against pollution
 - Increases the life span
- Splined plunger, no saddle needed

Standard supplied with

- High Flow female coupler A 118

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes


Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

specifications	HSC 10 S 5	HSC 20 S 5	HSC 30 S 5	HSC 50 S 5	HSC 100 S 5
art no	100.112.300	100.112.301	100.112.302	100.112.303	100.112.304
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	10	20	30	50
stroke	mm	50	50	50	50
closed height	mm	100	103	106	117
diameter (B)	mm	70	98	104	128
capacity	kN/t	99.8 / 10.2	203.6 / 20.8	318.1 / 32.4	510.4 / 52
effective pressure area	cm ²	13.9	28.3	44.2	70.9
required oil content (effective)	cc	69.3	141.4	221	354
connection		A 118	A 118	A 118	A 118
cylinder type		short stroke	short stroke	short stroke	short stroke
acting type		single	single	single	single
return type		spring	spring	spring	spring
material		steel	steel	steel	steel
weight, ready for use	kg	2.9	5.5	6.1	9.7
					22.2



FLAT CYLINDERS | spring return

FLAT CYLINDERS

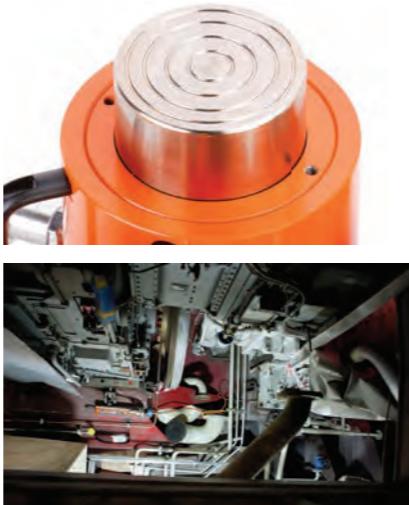

Features & benefits

- Compact, flat version, efficient in case of limited insertion space
- Usable in all positions
- Standard provided with fixing holes for easy assembly
- Protected against ejection of the plunger
- Dirt scraper ring
 - Protects against pollution
 - Increases the life span
- Splined plunger, no saddle needed

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

Standard supplied with

- High Flow female coupler A 118

Available on request


- Cylinders manufactured in conformity with customer specifications

specifications	HFC 5 S 0.5	HFC 5 S 1.5	HFC 10 S 1.5	HFC 20 S 1.5	HFC 30 S 0.5	HFC 30 S 1.5
art no	100.112.290	100.112.291	100.112.292	100.112.293	100.112.294	100.112.295
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	5	5	10	20	30
stroke	mm	5	15	15	15	15
closed height	mm	31	44	46	55	50
diameter (B)	mm	60	60	85	100	116
capacity	kN/t	50.9 / 5.2	50.9 / 5.2	99.8 / 10.2	203.6 / 20.8	318.1 / 32.4
effective pressure area	cm ²	7.1	7.1	13.9	28.3	44.2
required oil content (effective)	cc	4	11	28.8	42.4	22
connection		A 118	A 118	A 118	A 118	A 118
hose		yes				
cylinder type		flat	flat	flat	flat	flat
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		steel	steel	steel	steel	steel
weight, ready for use	kg	1.2	1.0	1.6	2.9	3.6
						4.2

specifications	HFC 50 S 1.5	HFC 75 S 1.5	HFC 100 S 1.5	HFC 150 S 1.5
art no	100.112.296	100.112.297	100.112.298	100.112.299
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72
tonnage	t	50	75	100
stroke	mm	5	15	15
closed height	mm	71	80	90
diameter (B)	mm	140	165	190
capacity	kN/t	510.4 / 52	747.9 / 76.3	1030.5 / 105.1
effective pressure area	cm ²	70.9	103.9	143.1
required oil content (effective)	cc	106	156	215
connection		A 118	A 118	A 118
hose		yes		
cylinder type		flat	flat	flat
acting type		single	single	single
return type		spring	spring	spring
material		steel	steel	steel
weight, ready for use	kg	7.0	11.0	18.1
				25.7



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

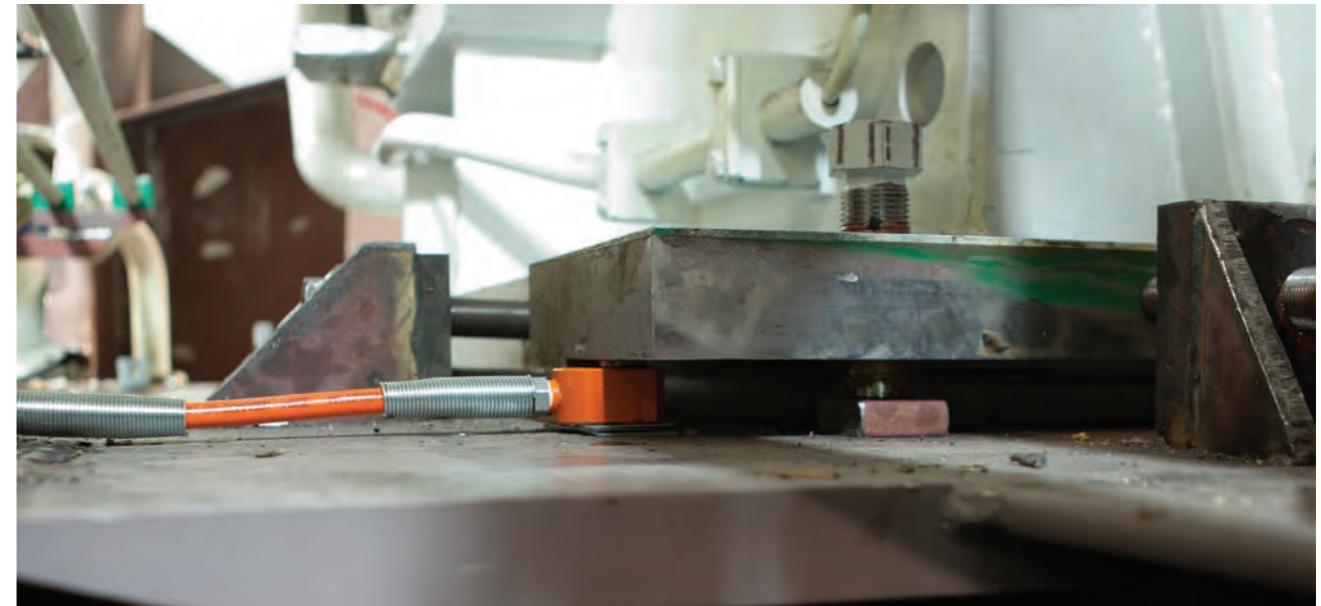

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



MULTI PURPOSE CYLINDERS

specifications	HGC 15 S 40	HGC 25 S 2.5	HGC 25 S 5	HGC 25 S 10	HGC 25 S 15	HGC 25 S 20
art no	100.112.235	100.112.236	100.112.237	100.112.238	100.112.239	100.112.240
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	15	25	25	25	25
stroke	mm	400	25	50	100	150
closed height	mm	515	138	165	215	265
diameter (B)	mm	70	85	85	85	85
capacity	kN/t	171 / 17.4	239 / 24.4	239 / 24.4	239 / 24.4	239 / 24.4
effective pressure area	cm²	23.8	33.2	33.2	33.2	33.2
required oil content (effective)	cc	950	83	166	332	498
connection		A 118				
cylinder type		multi purpose				
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		steel	steel	steel	steel	steel
weight, ready for use	kg	11.5	5.5	6.4	8.0	9.4
						11.3

specifications	HGC 25 S 25	HGC 25 S 30	HGC 25 S 35	HGC 25 S 45	HGC 35 S 5	HGC 35 S 10
art no	100.112.241	100.112.242	100.112.243	100.112.244	100.112.245	100.112.246
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	25	25	25	35	35
stroke	mm	250	300	350	450	50
closed height	mm	374	424	474	574	184
diameter (B)	mm	85	85	85	100	100
capacity	kN/t	239 / 24.4	239 / 24.4	239 / 24.4	362 / 36.9	362 / 36.9
effective pressure area	cm²	33.2	33.2	33.2	50.3	50.3
required oil content (effective)	cc	830	996	1161	1493	251
connection		A 118				
cylinder type		multi purpose				
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		steel	steel	steel	steel	steel
weight, ready for use	kg	13.3	14.9	16.5	19.8	9.3
						11.4


specifications	HGC 35 S 15	HGC 35 S 20	HGC 50 S 5	HGC 50 S 10	HGC 50 S 15	HGC 50 S 20
art no	100.112.247	100.112.248	100.112.249	100.112.250	100.112.251	100.112.252
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	35	35	35	35	35
stroke	mm	150	200	50	100	150
closed height	mm	284	334	176	226	276
diameter (B)	mm	100	100	127	127	127
capacity	kN/t	362 / 36.9	362 / 36.9	510 / 52	510 / 52	510 / 52
effective pressure area	cm²	50.3	50.3	70.9	70.9	70.9
required oil content (effective)	cc	754	1005	354	709	1063
connection		A 118				
cylinder type		multi purpose				
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		steel	steel	steel	steel	steel
weight, ready for use	kg	13.5	15.5	15.1	18.9	22.6
						26.4



MULTI PURPOSE CYLINDERS

specifications	HGC 50 S 25	HGC 50 S 35	HGC 75 S 15	HGC 75 S 35	HGC 100 S 5	HGC 100 S 10
art no	100.112.253	100.112.254	100.112.255	100.112.256	100.112.257	100.112.258
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	50	50	75	75	100
stroke	mm	250	350	150	350	50
closed height	mm	376	476	285	485	218
diameter (B)	mm	127	127	147	147	175
capacity	kN/t	510 / 52	510 / 52	748 / 76.3	748 / 76.3	1031 / 105.1
effective pressure area	cm²	70.9	70.9	103.9	103.9	143.1
required oil content (effective)	cc	1772	2481	1558	3635	716
connection		A 118				
cylinder type		multi purpose				
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		steel	steel	steel	steel	steel
weight, ready for use	kg	30.1	37.5	30.9	50.0	35.3
						42.2

specifications	HGC 100 S 15	HGC 100 S 25
art no	100.112.259	100.112.260
max. working pressure	bar/Mpa	720 / 72
tonnage	t	100
stroke	mm	150
closed height	mm	318
diameter (B)	mm	175
capacity	kN/t	1031 / 105.1
effective pressure area	cm²	143.1
required oil content (effective)	cc	2147
connection		A 118
cylinder type		multi purpose
acting type		single
return type		spring
material		steel
weight, ready for use	kg	50.0
		64.1

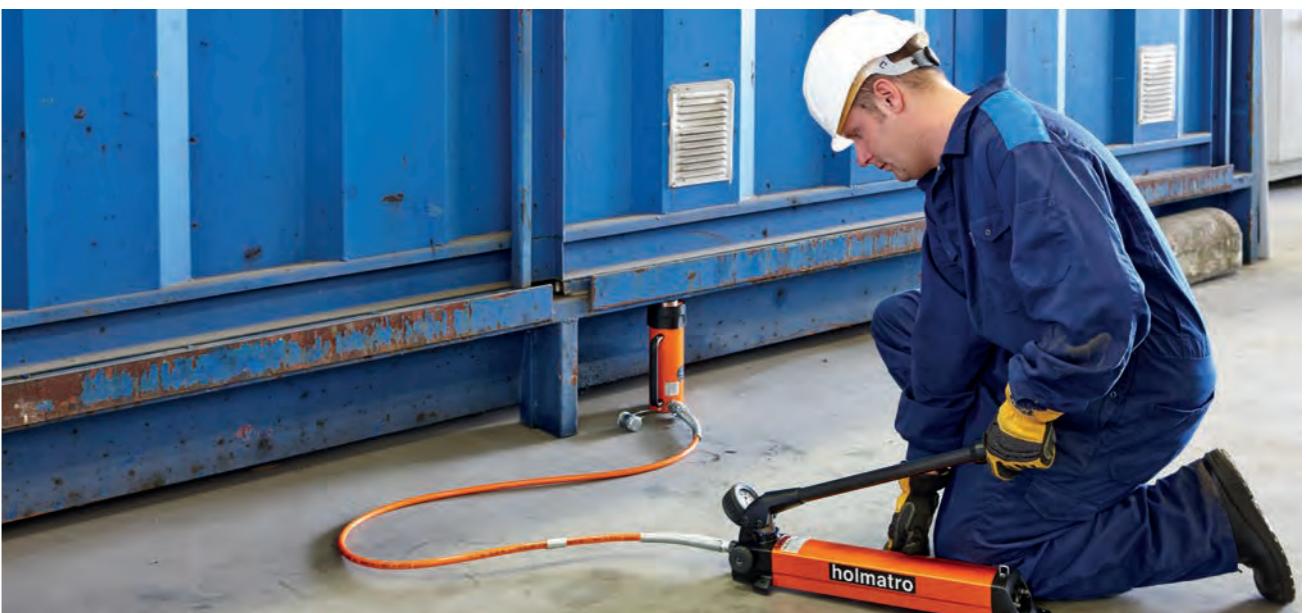

MULTI PURPOSE CYLINDER | set



Features & benefits

- Consists of:
 - 2x Multi Purpose cylinder, 1x Hydraulic wedge
 - 4x Extension tube
 - 1x Connection socket, 1x Connection nipple
 - 1x Round base plate
 - 1x Cross head, 1x Wedge head
 - 1x Cylinder toe, 1x Plunger toe
 - 1x Plunger adapter, 1x Cylinder body adapter
 - 1x Pump with pressure gauge
 - 1x 2 meter hose with male coupler
 - 1x Storage case

Available on request

- Cylinders manufactured in conformity with customer specifications

specifications	HIK 10 M
art no	100.062.003
return type	spring
material	steel
weight, ready for use	kg 44.0
dimension A	mm 782
dimension B	mm 287
dimension C	mm 171

Additional information

ATTENTION: Consult the user manual before fitting cylinder accessories to these cylinders. The maximum working pressure and total construction length is restricted when using cylinder accessories!

Multi purpose cylinders	18
Parts	23

MULTI PURPOSE CYLINDER | set parts

parts	description	model	art no
	High quality Multi Purpose Cylinder. Fitted with unique features that considerably lengthen its life span and service life. Offers appropriate solutions for the most varied applications. Holmatro Multi Purpose Cylinders come in 50 models and are available in different capacities and with different stroke lengths.	HGC 10 S 5	100.112.219
	High quality Multi Purpose Cylinder. Fitted with unique features that considerably lengthen its life span and service life. Offers appropriate solutions for the most varied applications. Holmatro Multi Purpose Cylinders come in 50 models and are available in different capacities and with different stroke lengths.	HGC 10 S 15	100.112.221
	Hydraulic wedge, spring return <ul style="list-style-type: none"> • To lift a load from a flat surface where there is a minimum insertion space available • Highly suitable to carry out maintenance in places that are difficult to access • Applications: lifting machines, dismantling and assembly, adjustment and alignment 	HW 1000	100.562.009
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 125 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	125 - HGC 10 / HCJ 10	100.002.984
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 250 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	250 - HGC 10 / HCJ 10	100.002.985
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 500 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	500 - HGC 10 / HCJ 10	100.002.987
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 750 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	750 - HGC 10 / HCJ 10	100.002.989
	Connection socket <ul style="list-style-type: none"> • To connect 2 extension tubes • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female (2x) • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.980
	Connection nipple <ul style="list-style-type: none"> • To connect accessories to cylinders • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.982
	Round base plate <ul style="list-style-type: none"> • To mount on bottom side of cylinder • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.978





PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



MULTI PURPOSE CYLINDERS

parts	description	model	art no
Cross head	<ul style="list-style-type: none"> To provide better grip Suitable for HGC 10 and HCJ 10 cylinders Thread size: 1 1/4" NPT female Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.966
Wedge head	<ul style="list-style-type: none"> For spreading Suitable for HGC 10 and HCJ 10 cylinders Thread size: 1 1/4" NPT female Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.968
Cylinder toe	<ul style="list-style-type: none"> Suitable for HGC 10 cylinders Thread size: 2 1/4"-14 UNS female Max. working pressure: 144 bar 	HGC 10	100.002.992
Plunger toe	<ul style="list-style-type: none"> Suitable for HGC 10 and HCJ 10 cylinders Thread size: 1 1/4" NPT female Max. working pressure: 144 bar 	HGC 10 / HCJ 10	100.002.991
Cylinder body adapter	<ul style="list-style-type: none"> Suitable for HGC 10 cylinders Thread size: 1 1/4" NPT female Max. working pressure: 360 bar Standard supplied with 2x bolt M8x16 	HGC 10	100.002.969
Plunger Adapter	<ul style="list-style-type: none"> Suitable for HGC 10 cylinders Thread size: 1 1/4" NPT male - 1"-8 UNC male Max. working pressure: 360 bar 	HGC 10	100.002.964
The PA 04 H 2 is the most compact, single acting, 2 stage hand pump in the hand pump range. The pump is ergonomically designed, has a robust, compact construction, is service- and maintenance-friendly and combines a low operating force with a high oil output. This all combined with a range of handy features makes this pump a worthwhile asset for you and your tools. This pump is ideal when you are working with smaller hydraulic tools and you want to profit from a very high oil output in the first stage (up to 45 bar) to speed things up.	PA 04 H 2	100.142.033	
Standard hose with male coupler A 119 on one side	H 2 SOU	100.572.102	
Pressure gauge set PA 04/09 pump	-	100.182.213	
Carrying storage box of hydraulic jack set HIK 10 M / HRK 10 M	-	150.581.001	



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



TELESCOPIC CYLINDERS | gravity return



Features & benefits

- Compact
- Lightweight
- Usable in all positions
- Protected against ejection of the plunger

Standard supplied with

- High Flow female coupler A 118
- HFJ 10/30 G 4 contains a 30 cm connecting hose with anti-kink spring
- HJ 20/50 G 11 contains a flat saddle

Available on request

- Cylinders manufactured in conformity with customer specifications
- Base mounting holes

specifications	HFJ 10/30 G 4	HJ 20/50 G 11
art no	100.111.005	100.112.103
max. working pressure	bar/Mpa 720 / 72	720 / 72
tonnage	t 10	20
stroke	mm 41	111
stroke 1st plunger	mm 21	56
stroke 2nd plunger	mm 20	55
closed height	mm 100	103
diameter (B)	mm 120	125
capacity 1st plunger	kN/t 318 / 32.4	510 / 52
capacity 2nd plunger	kN/t 99.7 / 10.2	203.5 / 20.8
effective pressure area 1st plunger	cm ² 44.2	70.8
effective pressure area 2nd plunger	cm ² 13.9	28.3
required oil content (effective)	cc 118	554
connection	A 118	A 118
hose	yes	
cylinder type	telescopic	telescopic
acting type	single	single
return type	gravity	gravity
material	steel	steel
weight, ready for use	kg 4.5	12.5

LOCKNUT CYLINDERS | gravity return



Features & benefits

- Usable in all positions
- Safe because of mechanical load locking
- Suitable for sustained load
- Flat saddle
 - Prevents damage to the plunger
 - Easy to replace with tilting saddle

Standard supplied with

- High Flow female coupler A 118
- Flat saddle

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes

specifications	HJ 10 G 15 SN	HJ 25 G 15 SN	HJ 50 G 15 SN	HJ 100 G 15 SN	HJ 150 G 15 SN	HJ 250 G 15 SN
art no	100.082.003	100.082.002	100.082.001	100.082.000	100.112.136	100.112.083
max. working pressure	bar/Mpa 720 / 72	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t 10	25	50	100	150	250
stroke	mm 150	150	150	150	150	150
closed height	mm 270	283	307	323	363	385
diameter (B)	mm 60	90	135	190	212	300
capacity	kN/t 99.3 / 10.1	238.9 / 24.4	510.3 / 52	1029.3 / 105	1538.9 / 159.9	2493.8 / 254.3
effective pressure area	cm ² 13.8	33.2	70.9	143	213.8	340.6
required oil content (effective)	cc 210	498	1065	2150	3207	5195
connection	A 118	A 118	A 118	A 118	A 118	A 118
cylinder type	lock nut	lock nut	lock nut	lock nut	lock nut	lock nut
acting type	single	single	single	single	single	single
return type	gravity	gravity	gravity	gravity	gravity	gravity
material	steel	steel	steel	steel	steel	steel
weight, ready for use	kg 5.9	14.0	34.0	71.0	101.0	180.0





Features & benefits

- Extreme low closed height and a maximum side load resistance of 10%. Therefor useful for many different applications
- Double-acting for controlled lifting and lowering
- Integrated safety valves for protection against overpressure on return side
- Multiple-start and rounded thread on plunger for a quicker positioning of the locknut and easy dirt removal
- Hard chromed cylinder wall for optimal wear resistance and corrosion protection
- QPQ treated mechanical locknut with optimised grip and 4 tommy bar holes for easy locking and unlocking
- XL Saddle+: QPQ tilting saddle protects the plunger and limits eccentric loads
- Cover plate for keeping water and dirt out of the cylinder when it is stored

Standard supplied with

- High Flow female coupler A 118
- Tilting saddle

Available on request

- Cylinders manufactured in conformity with customer specifications
- Lower closed height by using a maximum side load resistance of 5%

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

specifications	HLC 150 H 5	HLC 150 H 15	HLC 150 H 30	HLC 250 H 5	HLC 250 H 15	HLC 250 H 30
art no	100.122.129	100.122.130	100.122.131	100.122.132	100.122.133	100.122.134
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	150	150	150	250	250
stroke	mm	50	150	300	50	150
closed height	mm	275	400	580	317	444
diameter (B)	mm	194	194	194	245	245
max. side-load resistance	%	10	10	10	10	10
capacity	kN/t	1544 / 157.4	1544 / 157.4	1544 / 157.4	2586 / 263.7	2586 / 263.7
effective pressure area (press)	cm ²	214.3	214.3	214.3	358.9	358.9
effective pressure area (retract)	cm ²	37.7	37.7	75.6	75.6	75.6
required oil content (effective)	cc	883	2649	5299	1417	4251
connection		A 118				
cylinder type		lock nut				
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		steel	steel	steel	steel	steel
weight, ready for use	kg	56.3	79.0	112.9	103.0	144.0
						203.0



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



HIGH TONNAGE CYLINDERS | gravity return

HIGH TONNAGE CYLINDERS



Features & benefits

- Usable in all positions
- Protected against ejection of the plunger
- Flat saddle
 - Prevents damage to the plunger
 - Easy to replace with tilting saddle

Standard supplied with

- High Flow female coupler A 118
- Flat saddle

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes

Tilting saddles	55
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

specifications	HJ 50 G 6	HJ 50 G 15	HJ 50 G 30	HJ 75 G 15	HJ 75 G 30	HJ 100 G 6
art no	100.112.073	100.112.035	100.112.036	100.112.037	100.112.038	100.112.093
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	50	50	50	75	100
stroke	mm	60	150	300	150	300
closed height	mm	142	282	463	347	497
diameter (B)	mm	130	130	130	156	185
capacity	kN/t	510.3 / 52	510.3 / 52	510.3 / 52	747.9 / 76.3	747.9 / 76.3
effective pressure area	cm ²	70.9	70.9	70.9	103.9	103.9
required oil content (effective)	cc	425	1064	2127	1559	3117
connection		A 118				
cylinder type		high tonnage				
acting type		single	single	single	single	single
return type		gravity	gravity	gravity	gravity	gravity
material		steel	steel	steel	steel	steel
weight, ready for use	kg	12.5	27.0	39.5	46.0	63.0
						29.0

specifications	HJ 100 G 15	HJ 100 G 30	HJ 150 G 15	HJ 150 G 30	HJ 200 G 15	HJ 200 G 30
art no	100.112.039	100.112.040	100.112.046	100.112.047	100.112.048	100.112.049
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	100	100	150	150	200
stroke	mm	150	300	150	300	300
closed height	mm	309	497	317	502	327
diameter (B)	mm	178	178	227	227	261
capacity	kN/t	1029.3 / 105	1029.3 / 105	1538.9 / 156.9	1538.9 / 156.9	2040.6 / 208.1
effective pressure area	cm ²	143	143	213.8	213.8	283.5
required oil content (effective)	cc	2145	4290	3207	6414	4253
connection		A 118	A 118	A 118	A 118	A 118
cylinder type		high tonnage	high tonnage	high tonnage	high tonnage	high tonnage
acting type		single	single	single	single	single
return type		gravity	gravity	gravity	gravity	gravity
material		steel	steel	steel	steel	steel
weight, ready for use	kg	51.0	82.0	74.6	125.3	120.0
						184.0

specifications	HJ 300 G 15	HJ 300 G 30	HJ 400 G 15	HJ 400 G 30	HJ 500 G 15	HJ 500 G 30
art no	100.112.050	100.112.099	100.112.100	100.112.056	100.112.139	100.112.138
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	300	300	400	400	500
stroke	mm	150	300	150	300	150
closed height	mm	382	547	402	572	442
diameter (B)	mm	316	316	358	358	412
capacity	kN/t	2933 / 299.1	2933 / 299.1	3750 / 382.4	3750 / 382.4	4994 / 509.2
effective pressure area	cm ²	415	415	530	530	707
required oil content (effective)	cc	6225	12450	7950	15900	10605
connection		A 118				
cylinder type		high tonnage				
acting type		single	single	single	single	single
return type		gravity	gravity	gravity	gravity	gravity
material		steel	steel	steel	steel	steel
weight, ready for use	kg	238.0	257.0	322.0	408.0	386.0
						511.0



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



HIGH TONNAGE CYLINDERS | hydraulic return

HIGH TONNAGE CYLINDERS



Features & benefits

- Usable in all positions
- Protected against ejection of the plunger
- Flat saddle
 - Prevents damage to the plunger
 - Easy to replace with tilting saddle

Tilting saddles	55
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

Standard supplied with

- High Flow female coupler A 118
- Flat saddle

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes

specifications	HJ 50 H 15	HJ 50 H 30	HJ 75 H 15	HJ 75 H 30	HJ 100 H 5	HJ 100 H 15
art no	100.122.002	100.122.022	100.122.003	100.122.004	100.122.009	100.122.052
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	50	50	75	75	100
stroke	mm	150	300	150	300	50
closed height	mm	282	463	347	497	170
diameter (B)	mm	130	130	156	156	178
capacity	kN/t	510.3 / 52	510.3 / 52	747.9 / 76.3	747.9 / 76.3	1029.3 / 105
effective pressure area (press)	cm ²	70.9	70.9	103.9	103.9	143
effective pressure area (retract)	cm ²	20.6	20.6	53.6	53.6	56.6
required oil content (press)	cc	1064	2127	1559	3117	716
required oil content (retract)	cc	309	620	755	1509	283
connection		A 118				
cylinder type		high tonnage				
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		steel	steel	steel	steel	steel
weight, ready for use	kg	27.0	44.0	46.0	63.0	29.0
						53.0

specifications	HJ 100 H 30	HJ 150 H 15	HJ 150 H 30	HJ 200 H 15	HJ 200 H 30	HJ 300 H 15
art no	100.122.054	100.122.061	100.122.062	100.122.071	100.122.072	100.122.084
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	100	150	150	200	200
stroke	mm	300	150	300	150	150
closed height	mm	497	137	502	327	507
diameter (B)	mm	178	227	227	261	316
capacity	kN/t	1029.3 / 105	1538.9 / 156.9	1538.9 / 156.9	2040.6 / 208.1	2040.6 / 208.1
effective pressure area (press)	cm ²	143	213.8	213.8	283.5	283.5
effective pressure area (retract)	cm ²	56.6	110	110	82.5	82.5
required oil content (press)	cc	4290	3207	6414	4253	8505
required oil content (retract)	cc	1695	1650	3300	1238	2475
connection		A 118	A 118	A 118	A 118	A 118
cylinder type		high tonnage	high tonnage	high tonnage	high tonnage	high tonnage
acting type		double	double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
material		steel	steel	steel	steel	steel
weight, ready for use	kg	85.0	76.0	128.0	121.0	186.0
						240.0

specifications	HJ 300 H 30	HJ 400 H 15	HJ 400 H 30	HJ 500 H 15	HJ 500 H 30
art no	100.122.083	100.122.091	100.122.092	100.122.043	100.122.038
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	300	400	400	500
stroke	mm	300	150	300	150
closed height	mm	547	402	572	442
diameter (B)	mm	316	130	358	412
capacity	kN/t	2933 / 299.1	3750 / 382.4	3750 / 382.4	4994 / 509.2
effective pressure area (press)	cm ²	415.5	530.9	530.9	707
effective pressure area (retract)	cm ²	131.9	216.7	216.7	360.3
required oil content (press)	cc	12450	7950	15900	10605
required oil content (retract)	cc	3930	3238	6476	5400
connection		A 118	A 118	A 118	A 118
cylinder type		high tonnage	high tonnage	high tonnage	high tonnage
acting type		double	double	double	double
return type		hydraulic	hydraulic	hydraulic	hydraulic
material		steel	steel	steel	steel
weight, ready for use	kg	360.0	325.0	413.0	390.0
					520.0



CONSTRUCTION CYLINDERS | hydraulic return



Features & benefits

- Compact
- Lightweight
- Usable in all positions
- Protected against ejection of the plunger
- Screw-on saddle
 - Prevents damage to the plunger
 - Easy to replace
- Standard fixing thread
 - On plunger head
 - On cylinder housing
 - In cylinder bottom
 - Designed for maximum cylinder load

Standard supplied with

- High Flow female coupler A 118
- Flat saddle

Available on request

- Cylinders manufactured in conformity with customer specifications

specifications	HCJ 10 H 15	HCJ 25 H 15	HCJ 25 H 25
art no	100.122.066	100.122.067	100.122.068
max. working pressure	bar/Mpa 720 / 72	bar/Mpa 720 / 72	bar/Mpa 720 / 72
tonnage	t 10	25	25
stroke	mm 150	150	250
closed height	mm 327	350	450
diameter (B)	mm 66	85	85
capacity	kN/t 99.3 / 10.1	238.9 / 24.4	238.9 / 24.4
effective pressure area (press)	cm ² 13.8	33.2	33.2
effective pressure area (retract)	cm ² 6.8	17.3	17.3
required oil content (press)	cc 207	498	829
required oil content (retract)	cc 102	260	432
connection	A 118	A 118	A 118
cylinder type	construction	construction	construction
acting type	double	double	double
return type	hydraulic	hydraulic	hydraulic
material	steel	steel	steel
weight, ready for use	kg 6.1	12.7	18.2

Additional information

ATTENTION: Consult the user manual before fitting cylinder accessories to these cylinders. The maximum working pressure and total construction length is restricted when using cylinder accessories!

Accessories	51
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

HOLLOW PLUNGER CYLINDERS | gravity return



Features & benefits

- Compact
- Usable in all positions
- Protected against ejection of the plunger

Standard supplied with

- High Flow female coupler A 118

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes

specifications	HHJ 30 G 5	
art no	100.111.053	
max. working pressure	bar/Mpa 720 / 72	
tonnage	t 30	
stroke	mm 50	
closed height	mm 120	
drain plunger (R)	mm 33	
capacity	kN/t 293.7 / 29.9	
effective pressure area	cm ² 40.8	
required oil content (effective)	cc 204	
connection	A 118	
cylinder type	hollow plunger	
acting type	single	
return type	gravity	
material	steel	
weight, ready for use	kg 10.0	



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



HOLLOW PLUNGER CYLINDERS | spring return

HOLLOW PLUNGER CYLINDERS



Features & benefits

- Compact
- Usable in all positions
- Protected against ejection of the plunger
- Hollow saddle
 - Prevents damage to the plunger
 - Easy to replace with threaded or flat saddle

Thread saddles	56
Flat saddles	56
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

Standard supplied with

- High Flow female coupler A 118
- Hollow saddle, with the exception of the HHJ 5 S 2.5, HHJ 12 S 5 and HHJ 12 S 15 cylinders

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes

Accessories

- Saddles: threaded and flat saddles

specifications	HHJ 5 S 2.5	HHJ 12 S 5	HHJ 12 S 15	HHJ 17 S 5	HHJ 20 S 5	HHJ 20 S 15
art no	100.111.002	100.111.021	100.111.029	100.112.023	100.112.033	100.112.030
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	5	12	12	17	20
stroke	mm	25	50	150	50	150
closed height	mm	87	156	298	192	182
drain plunger (R)	mm	17	21	21	27	27
capacity	kN/t	54.3 / 5.5	126.7 / 12.9	126.7 / 12.9	169.6 / 17.3	223.9 / 22.8
effective pressure area	cm ²	7.5	17.6	17.6	23.6	31.1
required oil content (effective)	cc	19	88	264	118	156
connection		A 118				
cylinder type		hollow plunger				
acting type		single	single	single	single	single
return type		spring	spring	spring	spring	spring
material		steel	steel	steel	steel	steel
weight, ready for use	kg	1.9	6.3	11.0	7.3	8.6
						18.0

specifications	HHJ 30 S 7.5	HHJ 30 S 15	HHJ 45 S 15	HHJ 60 S 7.5	HHJ 110 S 7.5
art no	100.112.055	100.112.034	100.112.061	100.112.081	100.112.101
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72
tonnage	t	30	30	45	60
stroke	mm	75	150	150	75
closed height	mm	226	362	388	272
drain plunger (R)	mm	33	33	39	45
capacity	kN/t	293.7 / 29.9	293.7 / 29.9	453.5 / 46.2	610.4 / 62.2
effective pressure area	cm ²	40.8	40.8	63	84.8
required oil content (effective)	cc	306	612	945	636
connection		A 118	A 118	A 118	A 118
cylinder type		hollow plunger	hollow plunger	hollow plunger	hollow plunger
acting type		single	single	single	single
return type		spring	spring	spring	spring
material		steel	steel	steel	steel
weight, ready for use	kg	15.0	25.0	35.5	43.5
					78.3



EMAIL: OBCHOD@PAVLINER.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



HOLLOW PLUNGER CYLINDERS | hydraulic return



Features & benefits

- Usable in all positions
- Protected against ejection of the plunger
- Protected against overpressure on return side
- Hollow saddle
 - Prevents damage to the plunger
 - Easy to replace with threaded or flat saddle

Standard supplied with

- High Flow female coupler A 118 on inlet port
- High Flow female coupler with pressure relief valve A 418 on outlet port
- Hollow saddle

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread
- Base mounting holes

Accessories

- Saddles: threaded and flat saddles

specifications	HHJ 30 H 15	HHJ 60 H 20	HHJ 100 H 10	HHJ 100 H 20
art no	100.122.045	100.122.031	100.122.051	100.122.053
max. working pressure	bar/Mpa 720 / 72	bar/Mpa 720 / 72	bar/Mpa 720 / 72	bar/Mpa 720 / 72
tonnage	t 30	60	100	100
stroke	mm 150	200	100	200
closed height (A)	mm 285	334	265	395
drain plunger (R)	mm 33	45	54	54
capacity (press)	kN/t 293.7 / 29.9	kN/t 610.4 / 62.2	kN/t 1018.5 / 103.9	kN/t 1018.5 / 103.9
capacity (retract)	kN/t 131 / 13.4	kN/t 452.4 / 46.1	kN/t 706.9 / 72.1	kN/t 706.9 / 72.1
effective pressure area (press)	cm ² 40.8	cm ² 84.4	cm ² 141.5	cm ² 141.5
effective pressure area (retract)	cm ² 18.2	cm ² 62.8	cm ² 98.2	cm ² 98.2
required oil content (press)	cc 613	cc 1696	cc 1415	cc 2830
required oil content (retract)	cc 274	cc 1256	cc 982	cc 1964
connection	A 118	A 118	A 118	A 118
cylinder type	hollow plunger	hollow plunger	hollow plunger	hollow plunger
acting type	double	double	double	double
return type	hydraulic	hydraulic	hydraulic	hydraulic
material	steel	steel	steel	steel
weight, ready for use	kg 23.0	kg 40.0	kg 53.0	kg 78.0

PULLING CYLINDERS | spring return



Features & benefits

- Compact
- Usable in all positions
- Protected against ejection of the plunger
- Protected against overpressure

Standard supplied with

- High Flow female coupler with pressure relief valve A 418

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread

Accessories

- Pulling eyes and vlevis eyes (to be ordered separately, 2 pieces per cylinder)
- Protection spring (to be ordered separately)

specifications	HPJ 11 S 15	HPJ 30 S 15	HPJ 60 S 15
art no	100.131.001	100.131.011	100.131.021
max. working pressure	bar/Mpa 720 / 72	bar/Mpa 720 / 72	bar/Mpa 720 / 72
tonnage	t 11	30	60
stroke	mm 150	150	150
closed height (A)	mm 320	470	530
capacity	kN/t 113 / 11.5	kN/t 298.7 / 30.5	kN/t 610.4 / 62.2
effective pressure area	cm ² 15.7	cm ² 41.5	cm ² 84.8
required oil content (effective)	cc 236	cc 623	cc 1272
connection	A 118	A 118	A 118
cylinder type	pulling	pulling	pulling
acting type	single	single	single
return type	spring	spring	spring
material	steel	steel	steel
weight, ready for use	kg 11.5	kg 26.0	kg 45.0



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



PULLING CYLINDERS | hydraulic return



Features & benefits

- Compact
- Usable in all positions
- Protected against ejection of the plunger
- Protected against overpressure

Standard supplied with

- High Flow female coupler with pressure relief valve A 418

Available on request

- Cylinders manufactured in conformity with customer specifications
- Collar thread


Accessories

- Pulling eyes and clevis eyes (to be ordered separately, 2 pieces per cylinder)
- Protection spring (to be ordered separately)

specifications	HPJ 100 H 15	
art no	100.122.042	
max. working pressure	bar/Mpa	720 / 72
tonnage	t	100
stroke	mm	150
closed height (A)	mm	462
capacity (press)	kN/t	1271,9 . 129,7
capacity (retract)	kN/t	953,7 / 97,3
effective pressure area (press)	cm ²	176,7
effective pressure area (retract)	cm ²	132,5
required oil content (press)	cc	2651
required oil content (retract)	cc	1988
connection	A 118	
cylinder type	pulling	
acting type	double	
return type	hydraulic	
material	steel	
weight, ready for use	kg	75,0

Pulling eyes	49
Clevis eyes	49
Protection spring	49
Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

PULLING CYLINDERS | pulling eyes

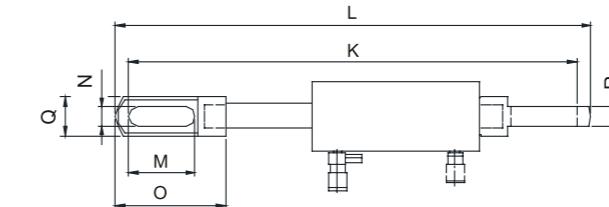

specifications	HPJ 11 S 15	HPJ 30 S 15	HPJ 60 S 15	HPJ 100 H 15
art no	100.181.051	100.181.051	100.181.052	100.181.053
dimension K	mm	760	890	1000
dimension L	mm	810	940	1080
dimension M	mm	120	120	150
dimension N	mm	35	35	45
dimension O	mm	200	200	260
dimension Q	mm	70	70	115
dimension R	mm	35	35	40
dimension Z	mm			50


Features & benefits

- Machined from solid steel
- Chemical blacked coating

Additional information

To be ordered separately, 2 pieces per cylinder

PULLING CYLINDERS | clevis eyes

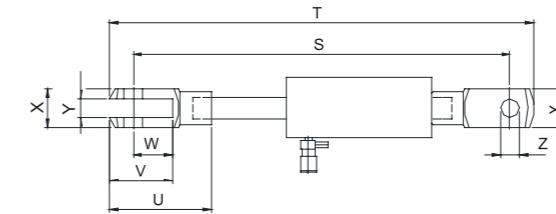

specifications	HPJ 11 S 15	HPJ 30 S 15
art no	100.181.056	100.181.057
dimension S	mm	650
dimension T	mm	730
dimension U	mm	160
dimension V	mm	100
dimension W	mm	60
dimension X	mm	60
dimension Y	mm	30
dimension Z	mm	30

Features & benefits

- Machined from solid steel
- Complete with pin and quick lock ring
- Specially suitable for use with slings

Additional information

To be ordered separately, 2 pieces per cylinder

PULLING CYLINDERS | protection springs



specifications	HPJ 11/30 S 15	HPJ 60 S 15	HPJ 100 H 15
art no	100.581.160	100.581.161	100.581.162


Features & benefits

- Protects the plunger against dirt and welding spots

Additional information

To be ordered separately

MACHINE LIFT | spring return

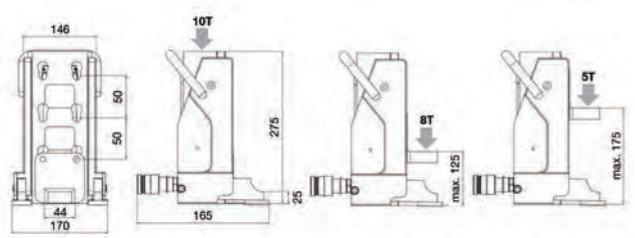


specifications	HMJ 10 S 15 M
art no	100.062.004
max. working pressure	bar/mpa 720 / 72
tonnage	t 10
stroke	mm 145
closed height	mm 275
capacity (head)	kN/t 100 / 10.2
capacity (toe), min.	kN/t 49 / 5
capacity (toe), max.	kN/t 78.5 / 8
required oil content (effective)	cc 208
return type	spring
connection	A 118
weight, ready for use	kg 18.5

Features & benefits

- Toe height adjustable in 3 positions: 25, 100 and 175 mm
- Protected against ejection of the plunger
- Telescopic support legs
- Duplex Power Coating makes the plunger corrosion-resistant
- Duo Power Ring; seal and bearing for long life span

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

TOE CYLINDER | spring return

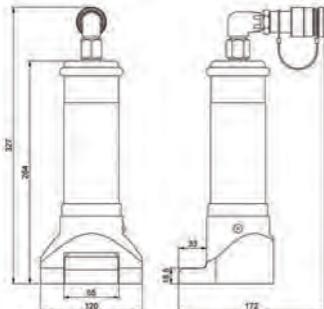

specifications	TJ 8 S 13
art no	100.112.102
max. working pressure	bar/mpa 720 / 72
tonnage	t 8
stroke	mm 130
closed height	mm 319
capacity (toe), min.	kN/t 88.3 / 9
required oil content (effective)	cc 207
return type	spring
connection	A 118
weight, ready for use	kg 6.5

Features & benefits

- Anti-skid profile on the toe
- Usable in all positions
- Compact construction, low weight
- Minimum tip clearance 18.5 mm
- Toe can be rotated 360°

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

ACCESSORIES

5 tons cylinder	description	model	art no
	Aluminium base plate • Suitable for HGC 5 and HGC 10 • Max. working pressure: 720 bar • Standard supplied with 2x bolt M8x20 and 2x bolt M6x20	HGC 5 / 10	100.003.004
	Assembly / Welding Ring • Suitable for HGC 5 cylinders • Thread size: 1½"-16 UN • Max. working pressure: 720 bar	HGC 5	100.182.189
10 tons cylinder	description	model	art no
	Plunger Adapter • Suitable for HGC 10 cylinders • Thread size: 1¼" NPT male - 1"-8 UNC male • Max. working pressure: 360 bar	HGC 10	100.002.964
	Cross head • To provide better grip • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar	HGC 10 / HCJ 10	100.002.966
	Wedge head • For spreading • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar	HGC 10 / HCJ 10	100.002.968
	Cylinder body adapter • Suitable for HGC 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar • Standard supplied with 2x bolt M8x16	HGC 10	100.002.969
	Round base plate • To mount on bottom side of cylinder • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar	HGC 10 / HCJ 10	100.002.978
	Connection socket • To connect 2 extension tubes • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female (2x) • Max. working pressure: 360 bar	HGC 10 / HCJ 10	100.002.980
	Connection nipple • To connect accessories to cylinders • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar	HGC 10 / HCJ 10	100.002.982





10 tons cylinder	description	model	art no
	Extension tube • Suitable for HGC 10 and HCJ 10 cylinders • Length: 125 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar	125 - HGC 10 / HCJ 10	100.002.984
	Extension tube • Suitable for HGC 10 and HCJ 10 cylinders • Length: 250 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar	250 - HGC 10 / HCJ 10	100.002.985
	Extension tube • Suitable for HGC 10 and HCJ 10 cylinders • Length: 500 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar	500 - HGC 10 / HCJ 10	100.002.987
	Extension tube • Suitable for HGC 10 and HCJ 10 cylinders • Length: 750 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar	750 - HGC 10 / HCJ 10	100.002.989
	Aluminium base plate • Suitable for HGC 5 and HGC 10 • Max. working pressure: 720 bar • Standard supplied with 2x bolt M8x20 and 2x bolt M6x20	HGC 5 / 10	100.003.004
	Plunger toe • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 144 bar	HGC 10 / HCJ 10	100.002.991
	Cylinder toe • Suitable for HGC 10 cylinders • Thread size: 2½"-14 UNS female • Max. working pressure: 144 bar	HGC 10	100.002.992
	Cylinder toe • Suitable for HCJ 10 cylinders • Thread size: M60x2 female • Max. working pressure: 144 bar	10 E	100.002.993
	Screw-on saddle • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female	10 D	100.181.091
	Bottom plug • Suitable for HCJ 10 cylinders • Thread size: 1¼" NPT male	10 K	100.181.519

10 tons cylinder	description	model	art no
	Assembly / Welding Ring • Suitable for HGC 10 cylinders • Thread size: 2½"-14 UNS • Max. working pressure: 720 bar	HCJ 10	100.182.190
	Assembly / Welding Ring • Suitable for HCJ 10 cylinders • Thread size: M60x2 • Max. working pressure: 720 bar	HCJ 10	100.181.522
15 tons cylinder	description	model	art no
	Aluminium base plate • Suitable for HGC 15 and HGC 25 • Max. working pressure: 720 bar • Standard supplied with 2x bolt M12x30 and 2x bolt M10x30	HGC 15 / 25	100.003.005
25 tons cylinder	description	model	art no
	Plunger Adapter • Suitable for HGC 25 cylinders • Thread size: 2" NPT male - 1½"-16 UN male • Max. working pressure: 360 bar	HGC 25	100.002.965
	Cross head • To provide better grip • Suitable for HGC 25 and HCJ 25 cylinders • Thread size: 2" NPT female • Max. working pressure: 360 bar	HGC 25 / HCJ 25	100.002.967
	Cylinder body adapter • Suitable for HGC 25 cylinders • Thread size: 2" NPT female • Max. working pressure: 360 bar • Standard supplied with 2x bolt M12x20	HGC 25	100.002.970
	Round base plate • To mount on bottom side of cylinder • Suitable for HGC 25 and HCJ 25 cylinders • Thread size: 2" NPT female • Max. working pressure: 360 bar	HGC 25 / HCJ 25	100.002.979
	Connection socket • To connect 2 extension tubes • Suitable for HGC 25 and HCJ 25 cylinders • Thread size: 2" NPT female (2x) • Max. working pressure: 360 bar	HGC 25 / HCJ 25	100.002.981
	Connection Nipple • To connect accessories to cylinders • Suitable for HGC 25 and HCJ 25 cylinders • Thread size: 2" NPT male (2x) • Max. working pressure: 360 bar	HGC 25 / HCJ 25	100.002.983



25 tons cylinder	description	model	art no
	Extension tube • Suitable for HGC 25 and HCJ 25 cylinders • Length: 250 mm • Thread size: 2" NPT male (2x) • Max. working pressure: 360 bar	250 - HGC 25 / HCJ 25	100.002.986
	Extension tube • Suitable for HGC 25 and HCJ 25 cylinders • Length: 500 mm • Thread size: 2" NPT male (2x) • Max. working pressure: 360 bar	500 - HGC 25 / HCJ 25	100.002.988
	Extension tube • Suitable for HGC 25 and HCJ 25 cylinders • Length: 750 mm • Thread size: 2" NPT male (2x) • Max. working pressure: 360 bar	750 - HGC 25 / HCJ 25	100.002.990
	Aluminium base plate • Suitable for HGC 15 and HGC 25 • Max. working pressure: 720 bar • Standard supplied with 2x bolt M12x30 and 2x bolt M10x30	HGC 15 / 25	100.003.005
	Screw-on saddle • Suitable for HGC 25 and HCJ 25 cylinders • Thread size: 2" NPT female	24 D	100.181.092
	Bottom plug • Suitable for HCJ 25 cylinders • Thread size: 2" NPT male	25 K	100.181.569
	Assembly / Welding Ring • Suitable for HGC 25 cylinders • Thread size: 3 5/16"-12 UN • Max. working pressure: 720 bar	HGC 25	100.182.193
	Assembly / Welding Ring • Suitable for HCJ 25 cylinders • Thread size: M85x2 • Max. working pressure: 720 bar	HCJ 25	100.181.572
50 tons cylinder	description	model	art no
	Assembly / Welding Ring • Suitable for HGC 50 cylinders • Thread size: 5"-12 UN • Max. working pressure: 720 bar	HGC 50	100.182.194

SADDLES | tilting saddles



Features & benefits

- Prevents side load on the cylinders up to a maximum angle of 5°
- Hardened material

multi purpose cylinders	TS HGC 5	TS HGC 10	TS HGC 15	TS HGC 25	TS HGC 35	TS HGC 50
art no	100.182.151	100.182.152	100.182.153	100.182.154	100.182.155	100.182.156
cylinder tonnage	t	5	10	15	25	35
diameter	mm	20	30	30	45	70

multi purpose cylinders	TS HGC 75	TS HGC 100
art no	100.182.160	100.182.150
cylinder tonnage	t	75
diameter	mm	70
additional height (vs flat saddle)	mm	9

aluminium cylinders	TS HAC 20	TS HAC 30	TS HAC 50	TS HAC 100	TS HAC 150
art no	100.182.164	100.182.163	100.182.165	100.182.159	100.182.161
cylinder tonnage	t	20	30	50	100
diameter	mm	45	45	70	105
additional height (vs flat saddle)	mm	8	8	9	12

high tonnage cylinders	S 50 TN	S 100 TN	S 200 TN	S 500 TN
art no	100.181.043	100.181.044	100.999.040	100.999.232
cylinder tonnage	t	50	100	200
diameter	mm	65	90	140
additional height (vs flat saddle)	mm	11	11	23

locknut cylinders - gravity	S 10 TN	S 25 TN	S 50 TN	S 100 TN	S 200 TN
art no	100.181.041	100.181.042	100.181.043	100.181.044	100.999.040
cylinder tonnage	t	10	25	50	100
diameter	mm	35	45	65	90
additional height (vs flat saddle)	mm	17	10	11	11



SADDLES | thread saddles



Features & benefits

- Perfect to combine with tension rods

Available on request

- Different screw-thread sizes in threaded saddles

hollow plunger cylinders	S 20 C	S 35 C	S 45 C	S 60 C	S 100 C	S 110 C
art no	100.181.013	100.181.016	100.181.019	100.181.022	100.181.025	100.181.028
cylinder tonnage	t	20	30	45	60	100
diameter	mm	48	58	63	78	95
thread hole	threadsize	1" - 8 UNC	1 1/4" - 7 UNC	1 1/2" - 8 UNS	1 5/8" - 8 UNS	2" - 8 UNS
						2" - 8 UNS

SADDLES | flat saddles



Features & benefits

- Perfect to combine with tension rods

Available on request

- Different screw-thread sizes in threaded saddles

hollow plunger cylinders	S 20 B	S 35 B	S 45 B	S 60 B	S 100 B	S 110 B
art no	100.181.012	100.181.015	100.181.018	100.181.021	100.181.024	100.181.027
cylinder tonnage	t	20	30	45	60	100
diameter	mm	48	58	63	78	95



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



HAND TOOLS




PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



VERTICAL LIFTING WEDGE | spring return

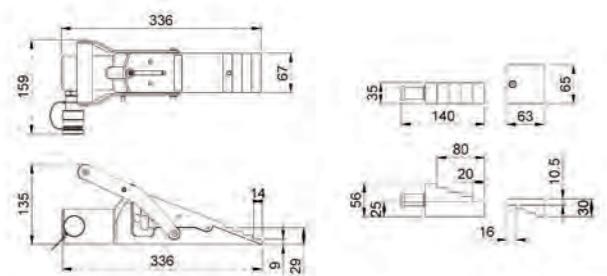

specifications	HVLW 16 S 2
art no	100.112.104
max. working pressure	bar/mpa 720 / 72
tonnage	t 16
min. insertion space	mm 9
lifting stroke	mm 20
max. spreading force	kN/t 156.6 / 16
required oil content (effective)	cc 75
return type	spring
weight, ready for use	kg 8.8

Features & benefits


- 100% vertical lifting movement; prevents misalignment of load
- Automatic mechanical retraction of lifting plate
- Minimum insertion space of 9 mm
- Vertical lifting stroke of 20 mm at each step

Standard supplied with

- Safety block
- Step block
- Grease pistol
- Grease cartridge Molycote®
- Plastic carrying / storage box

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

WEDGE | hydraulic return

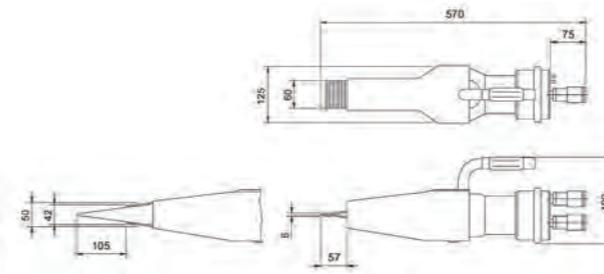


specifications	HWJ 25 U
art no	100.102.021
max. working pressure	bar/mpa 720 / 72
tonnage	t 24
min. insertion space	mm 6
lifting stroke	mm 51
max. spreading force	kN/t 235.4 / 24
required oil content (press)	cc 328
required oil content (retract)	cc 217
return type	hydraulic
weight, ready for use	kg 8.1

Features & benefits

- Minimum insertion space of 6 mm
- Compact construction
- Low weight
- Anti-skid profile on wedge arms
- Usable in all positions

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

WEDGE | spring return

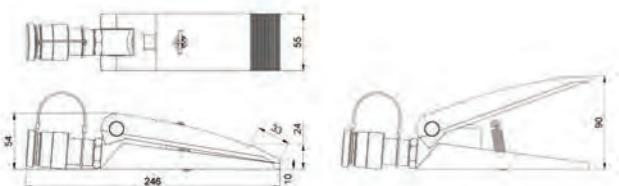

specifications	HW 1000
art no	100.562.009
max. working pressure	bar/mpa 720 / 72
tonnage	t 1
min. insertion space	mm 15
lifting stroke	mm 90
max. spreading force	kN/t 10 / 1
required oil content (effective)	cc 10
return type	spring
weight, ready for use	kg 2.1

Features & benefits

- Compact
- Lightweight
- Anti-skid profile on wedge arms
- Usable in all positions


Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

 **PAVLÍNEK®**
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



PULLER SETS | spring return

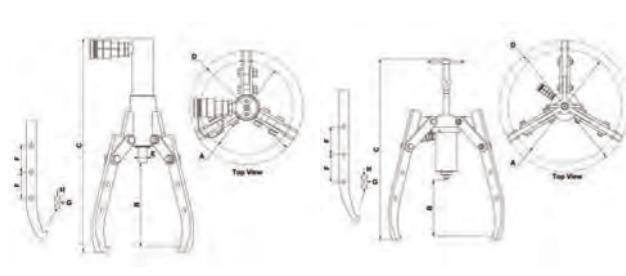

Features & benefits

- Adjustable for broad range of pulleys
- Compact and lightweight
- Usable in all positions

Available on request

- Cylinders manufactured in conformity with customer specifications


Additional information

Puller sets can also be used in combination with cylinders having other stroke lengths

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

specifications	HP 5 M	HP 10 M	HP 17	HP 30
art no	100.012.014	100.012.015	100.562.003	100.562.004
required cylinder	HGC 5 S 12.5	HGC 10 S 15	HHj 17 S 5	HHj 30 S 7.5
return type	spring	spring	spring	spring
connection	A 118	A 118	A 118	A 118
weight, excl. cylinder	kg	2.3	8.4	18.5
weight, incl. cylinder	kg	4.1	13.0	27.5
dimension A (min.)	mm	30	50	80
dimension A (max.)	mm	175	360	390
dimension B (min.)	mm	57	157	10
dimension B (max.)	mm	157	321	240
dimension C (max.)	mm	400	622	950
dimension D (max.)	mm	213	417	490
dimension E	mm	16	19	
dimension F	mm	50	82	115
dimension G	mm	20	25	32
dimension H	mm	7	15	18
				22

FLANGE SPREADERS | spring return

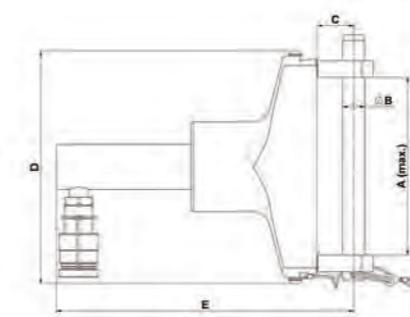

Features & benefits

- Safe; no flying off parts or sparks
- Compact and lightweight
- Easy to use
- Two or more can be used for a more equal distribution of forces

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101

Standard supplied with

- High Flow female coupler A 118
- 60° Spreading wedge
- Plastic carrying box, including high-grade grease Molycote®


Available on request

- Spreading wedge with 30° angle:
 - FLS 85 M, art no 100.103.009
 - FLS 170 M, art no 100.103.018
 - FLS 210 M, art no 100.182.141
- Flange spreader with opening larger than 210 mm

specifications	FLS 85 M	FLS 170 M	FLS 210 M
art no	100.012.011	100.012.012	100.012.013
max. working pressure	bar/Mpa	720 / 72	720 / 72
flange opening 30° wedge (min.)	mm	2	2
flange opening 30° wedge (max.)	mm	25	25
flange opening 60° wedge (min.)	mm	3	3
flange opening 60° wedge (max.)	mm	32	32
spreading force 30° wedge	kN/t	73.5 / 7.5	73.5 / 7.5
spreading force 60° wedge	kN/t	34.3 / 3.5	34.3 / 3.5
required oil content (effective)	cc	53	53
return type		spring	spring
connection		A 118	A 118
weight, ready for use	kg	4.5	8.0
weight, incl. case	kg	6.3	9.5
dimension A	mm	85	170
dimension B	mm	15	20
dimension C	mm	30	32.8
dimension D	mm	129	209
dimension E	mm	264	309



NUT SPLITTERS | spring return

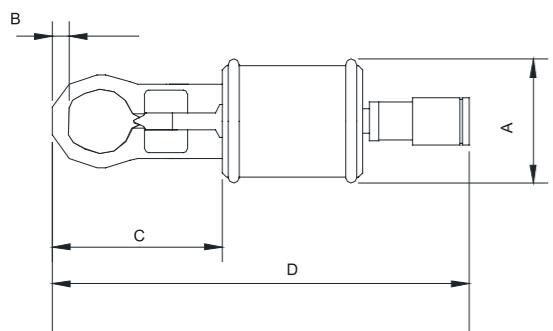

Features & benefits

- Compact
- Lightweight
- Usable in all positions
- Safe; no flying off parts or sparks
- Adjustable blade; prevents damage to the thread

Standard supplied with

- High Flow female coupler A 118
- Plastic carrying box, including:
 - High-grade grease Molycote®
 - Spare blade


specifications

	HNC 1536 NU	HNC 3250 U
art no	100.102.009	100.102.006
max. working pressure	bar/Mpa	720 / 72
min. reach bolt	M12 (1/2")	M22 (7/8")
max. reach category 8 bolt	M24 (3/4")	M33 (1 1/4")
max. reach 2H bolt	M20 (3/4")	M33 (1 1/4")
capacity	kN/t	148 / 15.1
required oil content (effective)	cc	32
return type		spring
weight, ready for use	kg	2.9
weight, incl. case	kg	4.2
thickness cutting head	mm	23
dimension A	mm	86
dimension B	mm	11
dimension C	mm	104
dimension D	mm	277
		321

Hydraulic pumps	79
Hydraulic hoses	98
Pressure gauges	101



LIFTING BAGS

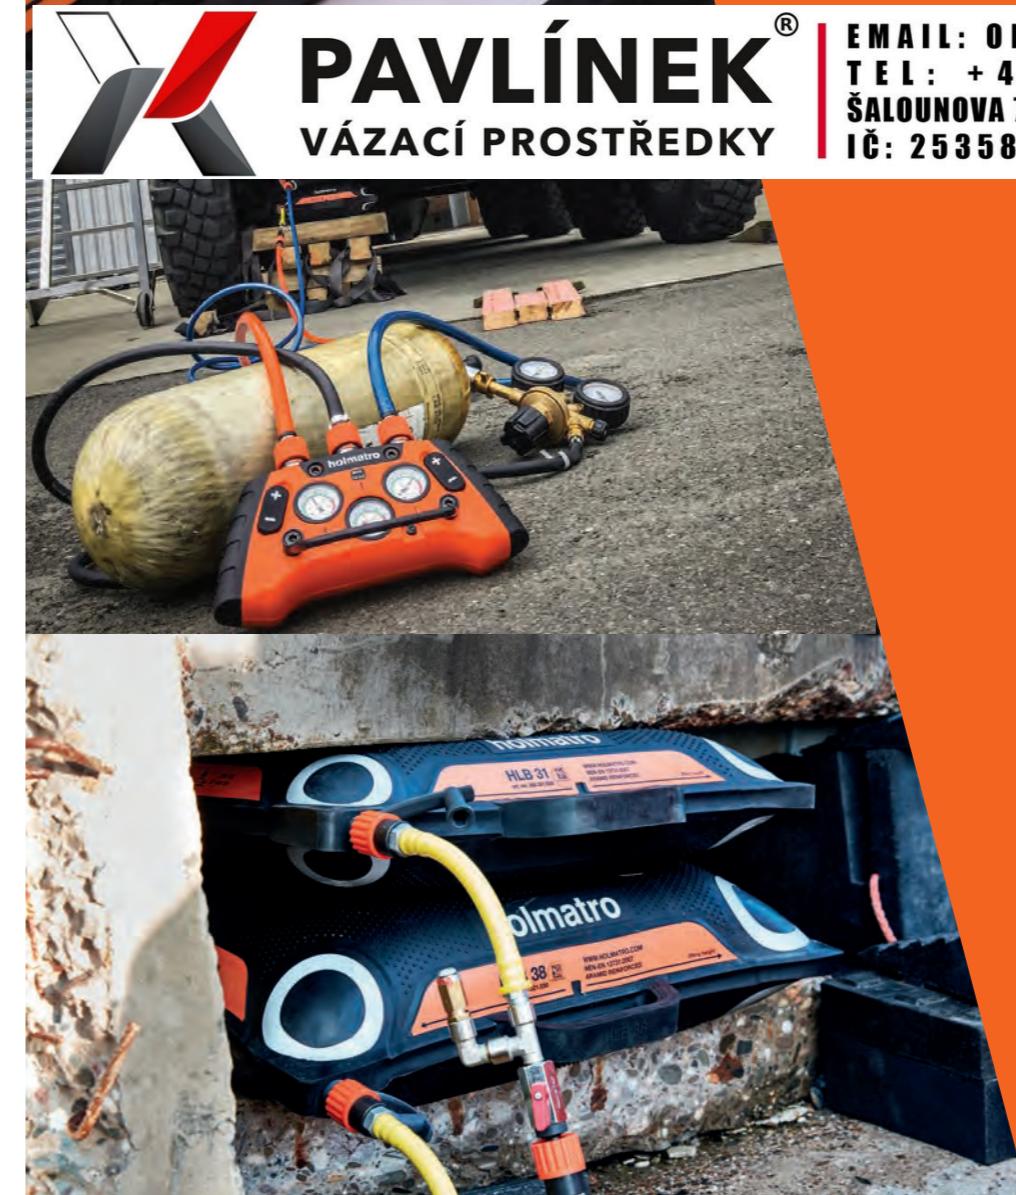

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511





Features & benefits

- Clear indication of safety warnings, technical specifications and lifting height
 - To help you work safer and easier
- Center markings on all sides
 - To help you position a smaller bag onto a larger model
- Non-slip surface with interlocking profile
 - To maximize the contact area and stability of inflated lifting bags
- Reflective markings
 - For optimal visibility in the dark
- Compliant with relevant safety standards
 - Meets EN 13731 and other legislative requirements

Lifting capacity / height diagrams	66
Air hoses	67
Accessories 12 bar	68
Accessories 8 bar	69

Standard supplied with




- Flexible integrated dust cap on air inlet

specifications	HLB 2	HLB 6	HLB 8	HLB 11	HLB 16	HLB 21
art no	350.321.021	350.321.022	350.321.023	350.321.025	350.321.026	350.321.027
max. working pressure	bar/Mpa	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2
max. inflation height	mm	94	141	179	207	236
thickness incl. profile	mm	22	22	22	25	25
max. lifting capacity	kN/t	21 / 2.1	55 / 5.6	82 / 8.4	110 / 11.2	155 / 15.8
max. lifting capacity (12 bar/174 psi)	kN/t	21 / 2.1	55 / 5.6	82 / 8.4	110 / 11.2	155 / 15.8
max. lifting capacity (8 bar/116 psi)	kN/t	14 / 1.4	37 / 3.8	55 / 5.6	73 / 7.4	103 / 10.5
air content (12 bar/174 psi)	l	9.6	26.4	40	64.8	104.4
air content (8 bar/116 psi)	l	6.4	17.6	26.4	43.2	69.6
water content	l	0.8	22	3.3	5.4	8.7
connection		ISO 6150 C				
min. bursting pressure	bar/Mpa	48 / 4.8	48 / 4.8	48 / 4.8	48 / 4.8	48 / 4.8
material		reinforced with 3 aramide inlays				
weight, ready for use	kg	0.7	1.6	2.1	3.2	4.5
dimensions (AxBxC)	mm	200 x 160 x 22	285 x 245 x 22	335 x 295 x 22	403 x 325 x 25	467 x 390 x 25
temperature range	°C	-20 + 50	-20 + 50	-20 + 50	-20 + 50	-20 + 50



specifications	HLB 31	HLB 38	HLB 53	HLB 63	HLB 85	HLB 96
art no	350.321.028	350.321.030	350.321.031	350.321.032	350.321.034	350.321.033
max. working pressure	bar/Mpa	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2
max. inflation height	mm	321	352	411	456	550
thickness incl. profile	mm	27	27	27	27	27
max. lifting capacity	kN/t	306 / 31.2	370 / 37.7	520 / 53	620 / 63.2	855 / 87.2
max. lifting capacity (12 bar/174 psi)	kN/t	306 / 31.2	370 / 37.7	520 / 53	620 / 63.2	855 / 87.2
max. lifting capacity (8 bar/116 psi)	kN/t	204 / 20.8	247 / 25.2	347 / 35.4	413 / 42.1	570 / 58.1
air content (12 bar/174 psi)	l	286	438	692	884	1415
air content (8 bar/116 psi)	l	190.4	296	462	592	943
water content	l	24	37	58	74	118
connection		ISO 6150 C				
min. bursting pressure	bar/Mpa	48 / 4.8	48 / 4.8	48 / 4.8	48 / 4.8	48 / 4.8
material		reinforced with 3 aramide inlays				
weight, ready for use	kg	8.6	10.0	15.0	17.0	23.0
dimensions (AxBxC)	mm	608 x 530 x 27	662 x 585 x 27	767 x 690 x 27	827 x 750 x 27	948 x 870 x 27
thread hole	threadsize	M6	M6	M6	M6	M6
temperature range	°C	-20 + 50	-20 + 50	-20 + 50	-20 + 50	-20 + 50



LIFTING CAPACITY / HEIGHT DIAGRAMS | 12 bar

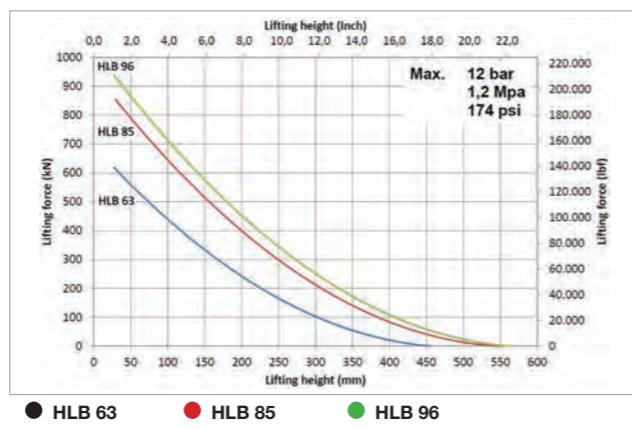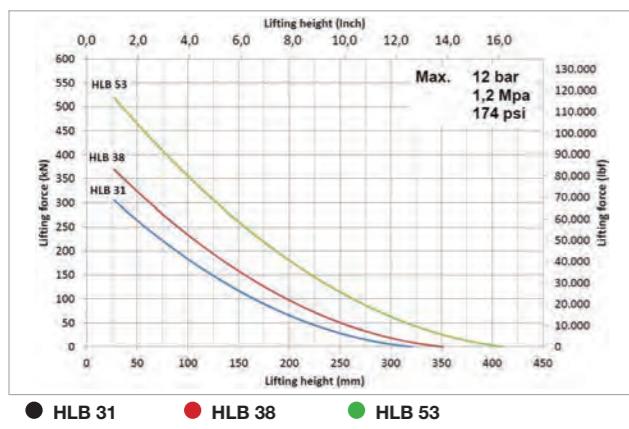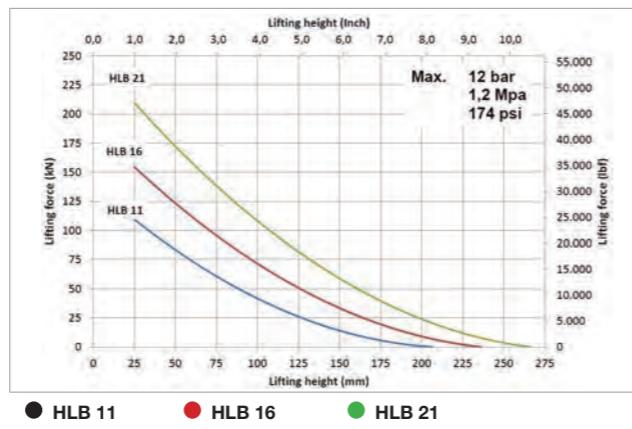

LIFTING CAPACITY / HEIGHT DIAGRAMS | 8 bar

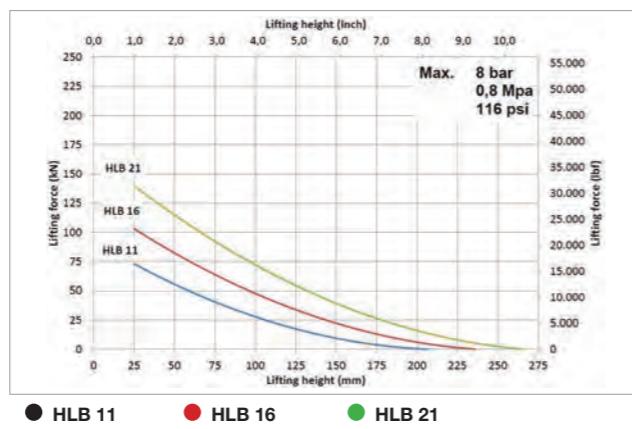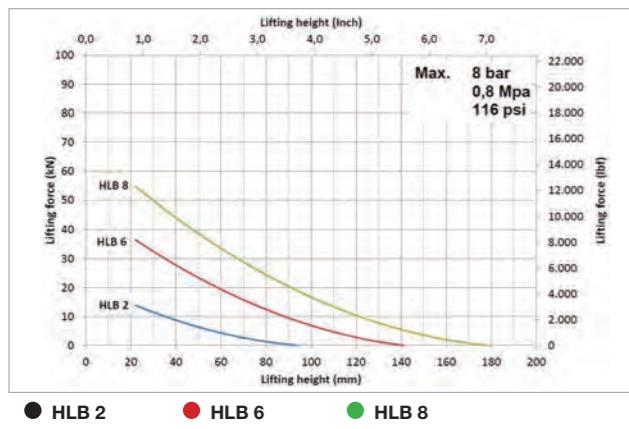

AIR HOSES



Features & benefits


- 4:1 safety ratio

air hoses 12 bar	AH 5 O	AH 5 Y	AH 5 B	AH 10 O	AH 10 Y	AH 10 B
art no	350.570.030	350.570.022	350.570.023	350.570.031	350.570.027	350.570.026
max. working pressure	bar/Mpa	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2
max. air pressure	bar/Mpa	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2	12 / 1.2
color		orange	yellow	blue	orange	yellow
length	m	5	5	5	10	10
weight, ready for use	kg	0.8	0.8	0.8	1.4	1.4
temperature range	°C	-20 + 80	-20 + 80	-20 + 80	-20 + 80	-20 + 80

air hoses 8 bar	AH 5 YU	AH 5 BU	AH 5 RU	AH 10 YU	AH 10 BU	AH 10 RU
art no	350.572.006	350.572.007	350.572.008	350.572.009	350.572.011	350.572.012
max. working pressure	bar/Mpa	8 / 0.8	8 / 0.8	8 / 0.8	8 / 0.8	8 / 0.8
color		yellow	blue	red	yellow	blue
length	m	5	5	5	10	10
temperature range	°C	-20 + 80	-20 + 80	-20 + 80	-20 + 80	-20 + 80



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

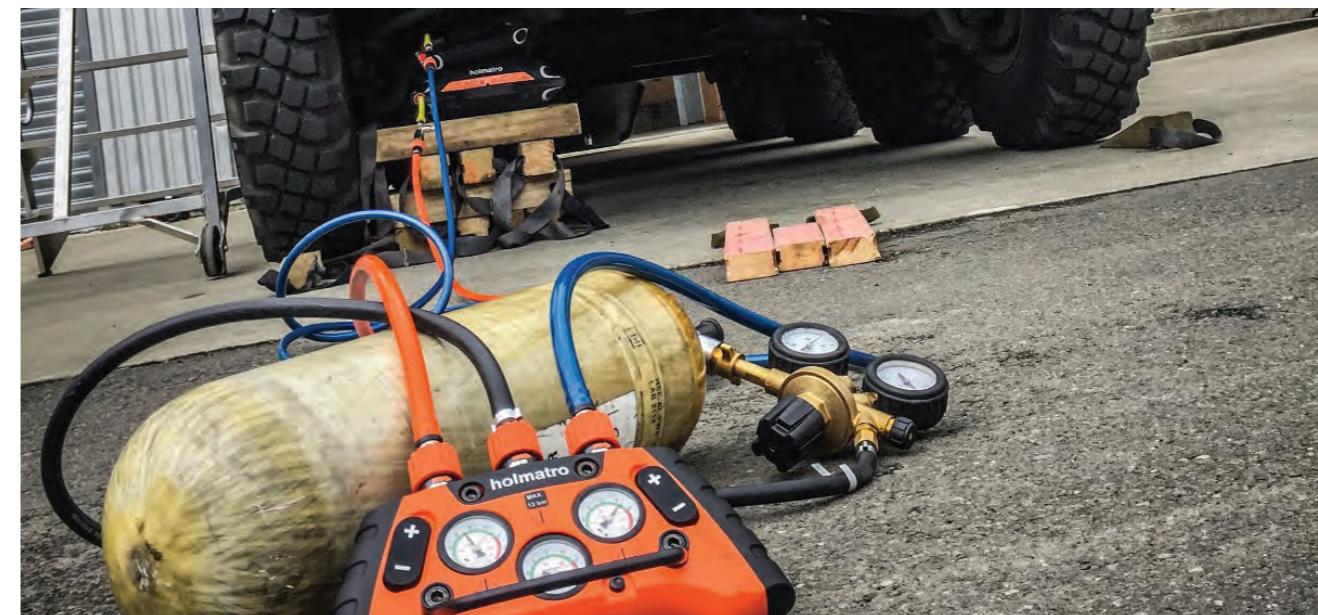

ACCESSORIES | 12 bar

ACCESSORIES

control units	description	model	art no
	Control unit for operation of one or two high pressure lifting bags • Designed for safe and controlled lifting • Working pressure 12 bar / 174 psi	HDC 12	350.182.095
	Single control unit • For the control of 1 high-pressure lifting bag • Safety valves set at 12 bar / 174 psi	SCV 12	350.182.110
	Double control unit • For the control of 2 high-pressure lifting bags • Safety valves set at 12 bar / 174 psi	DCV 12	350.182.111
	Triple control unit • For the control of 3 high-pressure lifting bags • Safety valves set at 12 bar / 174 psi	TCV 12	350.182.121
	Quadruple control unit • For the control of 4 high-pressure lifting bags • Safety valves set at 12 bar / 174 psi	QCV 12	350.182.122

accessories	description	model	art no
	Shut-off hose with safety valve for 12 bar lifting bags • To shut off inflated high-pressure lifting bags • Allows you to remove the hose, controller and air source from the working area • With safety coupler: unlocks in two steps to release pressure before hose disconnection	SOH 12	350.182.096
	Air adapter • Female coupler, 12 bar / 174 psi • Male coupler, 8 bar / 116 psi • To connect your 12 bar lifting bag to an 8 bar lifting system	AA F12 M8	350.182.107
	Air adapter • Two male couplers, 12 bar / 174 psi • To connect your 12 bar lifting bag system to a 12 bar compressor system	AA M12 M12	350.000.160
	Air adapter set • Air adapter AA M12 M12 • Air adapter AA M12 M8 • Air adapter AA F12 M8 • To connect 12 bar / 174 psi and 8 bar / 116 psi lifting systems	AAS 12	151.000.223

accessories	description	model	art no
	Air bottle, 300 bar, 6 litres • For use with all air operated tools and pumps	-	350.581.096
	Pressure reducer for air bottles of 300 bar • Complete with 2 m hose	PRV 12	350.182.100
	Lifting eyes set (2 pcs) • To attach a rope for easy maneuvering of your lifting bag	-	350.182.129
	Slider pads set (3 pcs) • For easy insertion of a lifting bag underneath an object	-	151.000.180
	control sets Air control set • Synthetic carrying/storage case with control unit, hoses, shut-off hoses, pressure reducer, air adapters and connection piece for 300 bar air bottles • Everything you need to operate your 12 bar/174 psi lifting bags	ACS 12	350.182.125

ACCESSORIES | 8 bar

control units	description	model	art no
	Control unit for operation of one or two high pressure lifting bags • Designed for safe and controlled lifting • Working pressure 8 bar / 116 psi	HDC 8	350.182.102
	Single control unit • For the control of 1 high-pressure lifting bag • Safety valves set at 8.5 bars	SCV 10 U	350.582.042
	Double control unit • For the control of 2 high-pressure lifting bags • Safety valves set at 8.5 bars	DCV 10 U	350.582.034

MECHANICAL TOOLS

ACCESSORIES

control units	description	model	art no
	<p>Triple control unit</p> <ul style="list-style-type: none"> • For the control of 3 high-pressure lifting bags • Safety valves set at 8.5 bars 	TCV 10 U	350.582.059
	<p>Quadruple control unit</p> <ul style="list-style-type: none"> • For the control of 4 high-pressure lifting bags • Safety valves set at 8.5 bars 	QCV 10 U	350.582.060
accessories	description	model	art no
	<p>Shut-off hose with safety</p> <ul style="list-style-type: none"> • To close high-pressure lifting bags while remaining under pressure in order to use hose and air source elsewhere 	-	350.582.035
	<p>Air adapter</p> <ul style="list-style-type: none"> • Female coupler, 12 bar / 174 psi • Male coupler, 8 bar / 116 psi • To connect your 12 bar lifting bag to an 8 bar lifting system 	AA F12 M8	350.182.107
	<p>Adapter set</p> <ul style="list-style-type: none"> • Synthetic carrying/storage case with various adapters for connecting high pressure lifting bags to various air sources 	UAS 10	350.582.050
	<p>Air bottle, 300 bar, 6 litres</p> <ul style="list-style-type: none"> • For use with all air operated tools and pumps 	300 bar	350.581.096
	<p>Pressure reducer</p> <ul style="list-style-type: none"> • For both 200 and 300 air bottles • Complete with hose 2 m 	PRV 823 AU	350.182.002
control sets	description	model	art no
	<p>Air control set</p> <ul style="list-style-type: none"> • Synthetic orange carrying/storage case with control unit, hoses, shut-off hose, pressure reducer and connection piece for air bottles 300 bar 	DCS 10 U_300	350.582.039



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



JACKS | cast iron



Features & benefits

- Made of cast iron; resistant to continuous heavy operating conditions
- Unique ratchet handle for engagement both wheel and plunger
- Self-locking; for safe working
- Robust; can be used close to welding works and under water
- Low maintenance
- A range of 13 models with different capacities and stroke lengths

Standard supplied with

- Handle bar

specifications	JJ 1015	JJ 1513	JJ 2513	JJ 2525	JJ 2533	JJ 3020
art no	200.401.001	200.401.011	200.401.021	200.102.001	200.102.005	200.102.002
tonnage	t 10	15	25	25	25	30
stroke	mm 150	125	125	250	330	200
closed height	mm 280	255	255	395	485	350
capacity	kN/t 98.1 / 10	147.2 / 15	245.3 / 25	245.3 / 25	245.3 / 25	294 / 30
weight, ready for use	kg 12.0	12.0	16.0	21.0	25.0	26.0

specifications	JJ 3513	JJ 3525	JJ 3535	JJ 5013	JJ 5025	JJ 5035
art no	200.401.031	200.102.003	200.102.006	200.401.041	200.102.004	200.102.007
tonnage	t 35	35	35	50	50	50
stroke	mm 130	250	350	130	250	350
closed height	mm 280	410	535	290	445	555
capacity	kN/t 343.4 / 35	343.4 / 35	343.4 / 35	490.5 / 50	490.5 / 50	490.5 / 50
weight, ready for use	kg 24.0	32.0	37.0	31.0	42.0	47.0

specifications	JJ 10011
art no	200.401.051
tonnage	t 100
stroke	mm 105
closed height	mm 310
capacity	kN/t 981 / 100
weight, ready for use	kg 75.0



JACKS | aluminium




Features & benefits

- Compact and lightweight construction; easy to work with and better for the welfare of your employees
- Special sliding pad instead of ball bearings
- Self-locking; for safe working
- Extendable handle bar
- All jacks have a handle

specifications	AJ 1008	AJ 1510	AJ 2510
art no	200.401.004	200.401.003	200.401.002
tonnage	t 10	15	25
stroke	mm 80	100	100
closed height	mm 175	200	200
capacity	kN/t 100 / 10.2	150 / 15.3	250 / 25.5
weight, ready for use	kg 6.1	6.8	9.5

PULLING JACKS

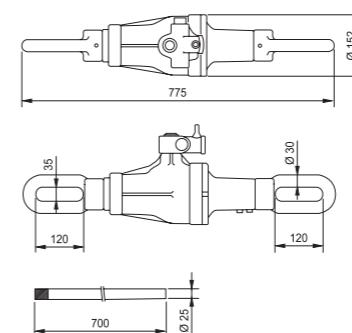


specifications	PL 2510
art no	200.421.001
tonnage	t 25
stroke	mm 100
retracted length	mm 775
capacity	kN/t 245.3 / 25
weight, ready for use	kg 32.0

Features & benefits

- Made of cast iron; resistant to continuous heavy operating conditions
- Unique ratchet handle for engagement both wheel and plunger
- Pulling eyes and an handle bar
- Self-locking; for safe working
- Robust; can be used close to welding works and under water
- Usable in all positions
- Low maintenance



TOE JACKS

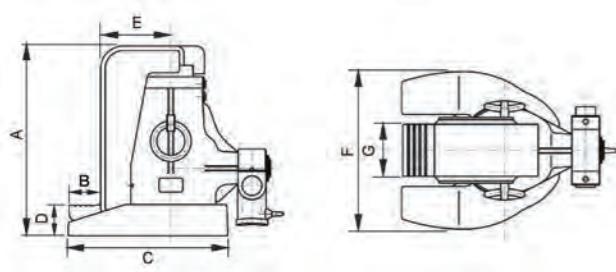


Features & benefits

- Made of cast iron; resistant to continuous heavy operating conditions
- Unique ratchet handle for engagement both wheel and plunger
- Self-locking; for safe working
- Robust; can be used close to welding works and under water

specifications	NJ 0615	NJ 1013	NJ 1513	NJ 2513
art no	200.102.022	200.102.023	200.102.024	200.102.025
tonnage	t 6	10	15	25
stroke	mm 150	125	125	130
closed height	mm 310	290	297	332
capacity	kN/t	60 / 6.1	100 / 10.2	150 / 15.3
weight, ready for use	kg	23.0	29.0	38.0
dimension A	mm	310	290	297
dimension B	mm	45	50	50
dimension C	mm	208	227	242
dimension D	mm	30	40	45
dimension E	mm	85	93	101
dimension F	mm	195	210	230
dimension G	mm	70	75	80

TRaversing beds

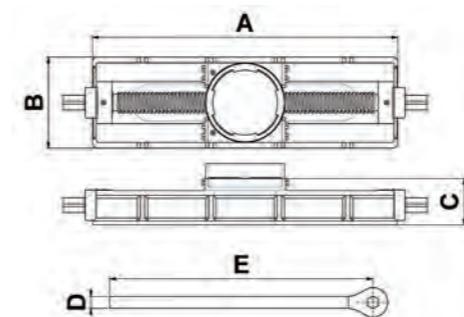

Features & benefits

- Made of cast iron; resistant to continuous heavy operating conditions
- Screw shaft and handle bar; for easy operating
- Self-locking; for safe working
- Robust; can be used close to welding works and under water
- Low maintenance

Additional information

ATTENTION: Cannot be used with JJ 10011, aluminium mechanical jacks and mechanical toe jacks!

specifications	TB 1030	TB 1530	TB 2530	TB 2545	TB 3530	TB 3545
art no	200.102.008	200.102.009	200.102.010	200.102.011	200.102.012	200.102.013
suitable for jack	JJ 1015	JJ 1513	JJ 25**	JJ 25**	JJ 30** / JJ 35**	JJ 30** / JJ 35**
max. horizontal displacement	mm	300	300	300	450	450
weight, ready for use	kg	20.0	20.0	25.0	31.0	33.0
dimension A	mm	465	465	470	620	505
dimension B	mm	165	165	185	185	200
dimension C	mm	85	85	90	90	97
dimension D	mm	24	24	30	30	30
dimension E	mm	535	535	600	600	600

specifications	TB 5030	TB 5045
art no	200.102.014	200.102.0015
suitable for jack	JJ 50**	JJ 50**
max. horizontal displacement	mm	300
weight, ready for use	kg	43.0
dimension A	mm	530
dimension B	mm	210
dimension C	mm	108
dimension D	mm	30
dimension E	mm	600


PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

BASE PLATES

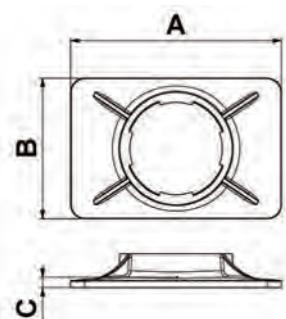


Features & benefits

- Made of cast iron; resistant to continuous heavy operating conditions
- Robust; can be used close to welding works and under water
- Low maintenance

specifications	SB 10	SB 15	SB 25	SB 35	SB 50
art no	200.102.016	200.102.017	200.102.018	200.102.020	200.102.021
suitable for jack	JJ 1015	JJ 1513	JJ 25**	JJ 30** / JJ 35**	JJ 50**
weight, ready for use	kg	2.0	5.0	7.5	9.5
dimension A	mm	220	240	300	300
dimension B	mm	180	190	200	220
dimension C	mm	10	12	15	18


SHIP WEDGES

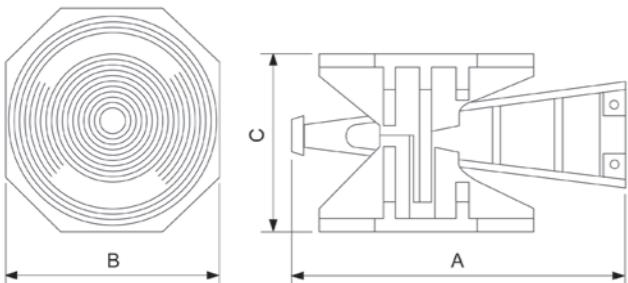


Features & benefits

- Unloads in one go with maximum load
- Robust; resistant to continuous heavy operating conditions
- Can be used close to welding works
- Low maintenance

specifications	W 50	W 80
art no	500.501.050	500.501.080
max. height	mm	225
min. height	mm	200
capacity	kN/t	490.5 / 50
weight, ready for use	kg	29.0
dimension (AxBxC)	mm	390 x 255 x 200

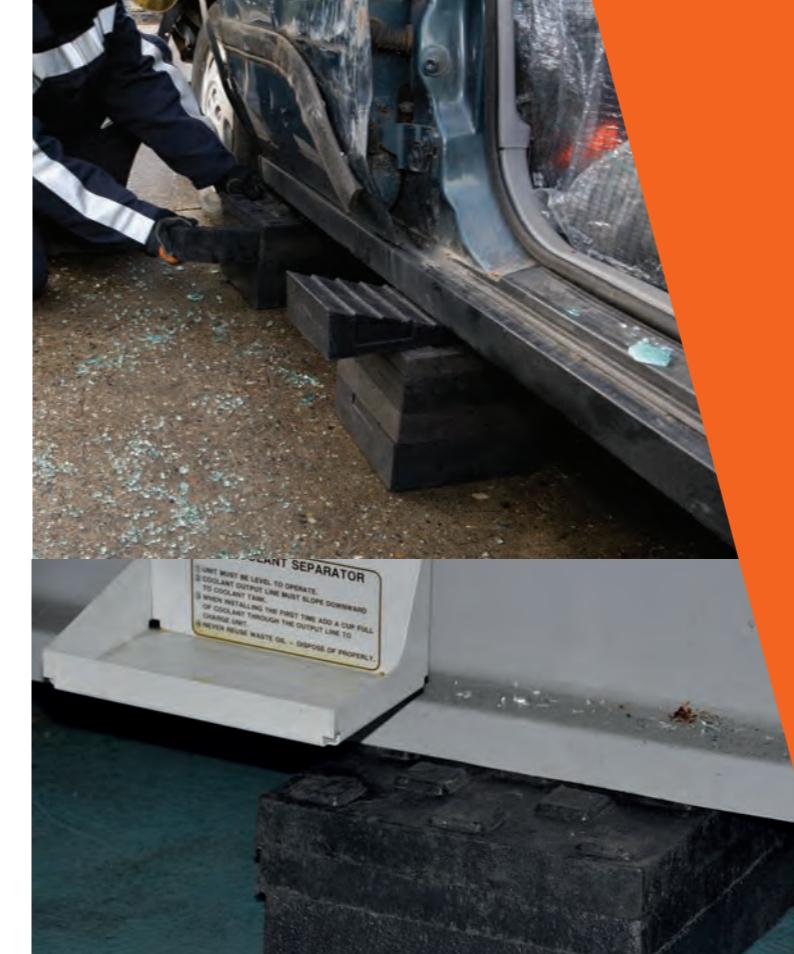

ASSIST TOOLS


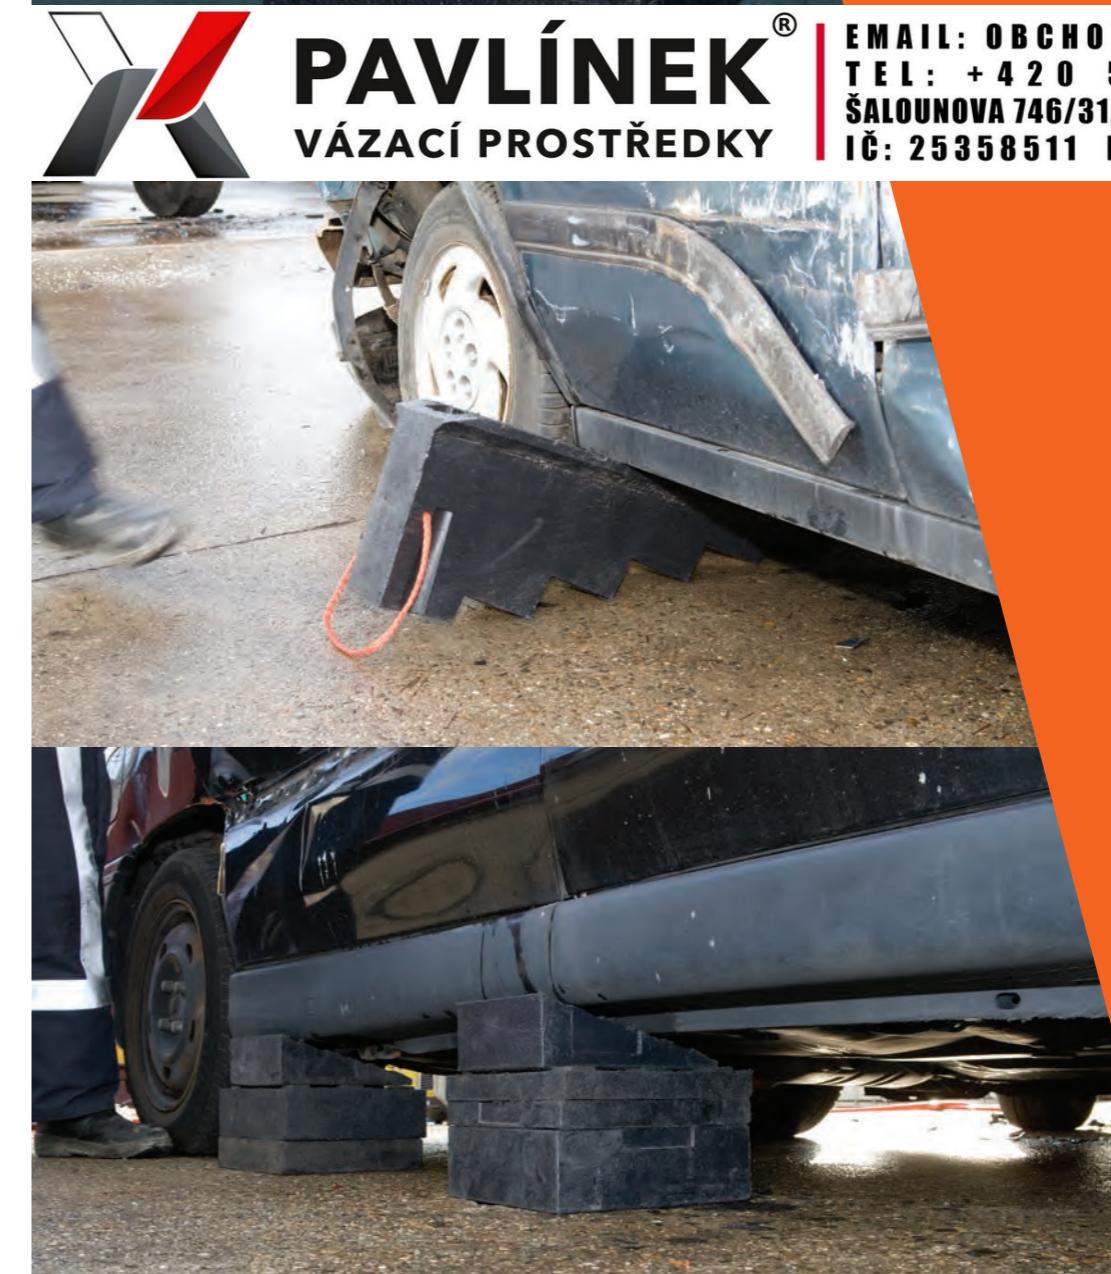


PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



CHOCKS AND BLOCKS | set A

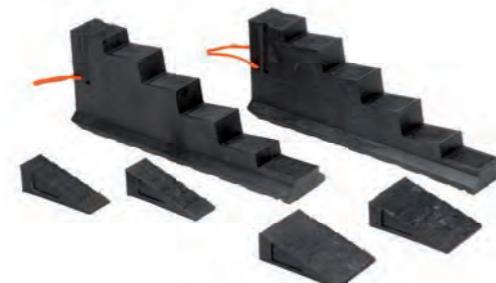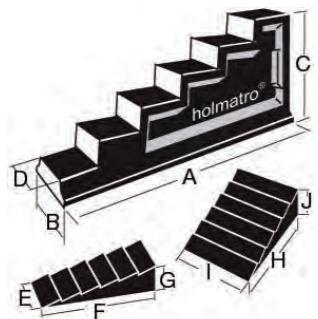

specifications	Set A
art no	150.562.010
weight, ready for use	kg 15.6


Features & benefits

- Environment-friendly; made of recycled polyethylene and 100% re-usable
- Longer life span than wood; virtually indestructible through one piece moulding
- Non-absorbent material; total resistance to water and oil
- Stackable; non-slip with unique surface profile design
- Extra grip due to elasticity of material under load
- Higher surface pressure allowed; supports 100 kg/cm² in all directions
- Lightweight; floats on water
- Safe; no splintering

Standard supplied with

- 2 x step chock (6,3 kg, art no 150.563.060), 2 x wedge (small, 0,5 kg, art no 150.563.049) and 2 x wedge (large, 1,0 kg, art no 150.563.050)

CHOCKS AND BLOCKS | set B

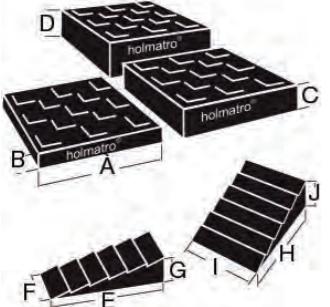

specifications	Set B
art no	150.562.004
weight, ready for use	kg 15.0

Features & benefits

- Environment-friendly; made of recycled polyethylene and 100% re-usable
- Longer life span than wood; virtually indestructible through one piece moulding
- Non-absorbent material; total resistance to water and oil
- Stackable; non-slip with unique surface profile design
- Extra grip due to elasticity of material under load
- Higher surface pressure allowed; supports 100 kg/cm² in all directions
- Lightweight; floats on water
- Safe; no splintering

Standard supplied with

- 2x wedge (small, 0,5 kg, art no 150.563.049), 2x wedge (large, 1,0 kg, art no 150.563.050), 2x lock block (low, 1,0 kg, art no 150.563.061), 2x lock block(medium, 2,0 kg, art no 150.563.071) and 2x lock block (high, 3,0 kg, art no 150.563.073)




HYDRAULIC PUMPS



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



HAND AND FOOT PUMPS

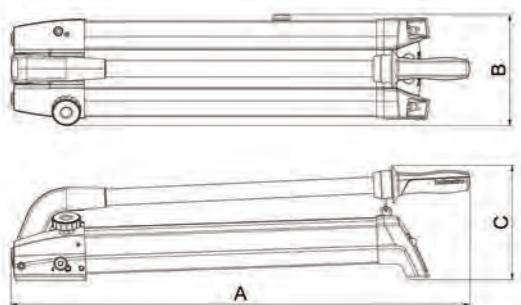


Features & benefits

- Ergonomic design
 - Light weight; easy to carry and operate
 - Low operating force required; minimal user effort
 - Soft-grip handles; more comfort and grip
 - Anti-slip rubber underneath; pump is stable and does not shift
 - Pump handle lock; easy and safe to carry
- Service- and maintenance-friendly; technical parts are easy to access and replace without removing the tank
- High oil output; quicker action both in the first and second stage
- Accurately adjustable pressure release valve; loads can be lowered safely and with extreme control
- Pressure gauge connection on the pump block; the pressure gauge can be directly mounted on the pump at an angle of 45 degrees, making it easily readable
- Oil level glass in the tank; easily check the oil level in both horizontal and vertical position
- Integrated filler funnel; top up oil easily and quickly without extra accessories
- Push & Unlock pump handle lock; unlocking is quick and easy with one brief push on the pump handle

Control valves	94
Accessories	95
Hydraulic hoses	98
Pressure gauge set	103
Valve blocks 'FlowPanel'	104

specifications	PA 04 H 2	PA 09 H 2	PA 18 H 2	PA 38 H 2	PA 58 H 2	PA 18 F 2
art no	100.142.033	100.142.034	100.142.035	100.142.037	100.142.038	100.142.036
max. working pressure	bar/Mpa 720 / 72					
capacity oil tank (effective)	cc 400	cc 900	cc 1800	cc 3800	cc 5800	cc 1800
capacity oil tank	cc 500	cc 1000	cc 1990	cc 4150	cc 6150	cc 1990
first stage output (per stroke)	cc 18.4	cc 22	cc 42.8	cc 42.8	cc 50.5	cc 42.8
second stage output (per stroke)	cc 1.4	cc 2.1	cc 3.1	cc 3.1	cc 4	cc 3.1
first stage press range	bar/Mpa 0-45 / 0-4.5					
second stage pressure range	bar/Mpa 45-720 / 4.5-72					
max. operating force	kg 32.0	kg 33.0	kg 35.0	kg 35.0	kg 34.0	kg 37.0
connection	3/8" NPT female					
operator type	hand	hand	hand	hand	hand	foot
double acting optional	no	no	yes	yes	yes	yes
weight, ready for use	kg 3.4	kg 4.7	kg 7.6	kg 11.4	kg 14.6	kg 8.3
dimension A	mm 434	mm 619	mm 700	mm 700	mm 897	mm 724
dimension B	mm 135	mm 135	mm 169	mm 183	mm 182	mm 169
dimension C	mm 165	mm 170	mm 175	mm 175	mm 185	mm 167

COMPACT AIR PUMP | single-acting

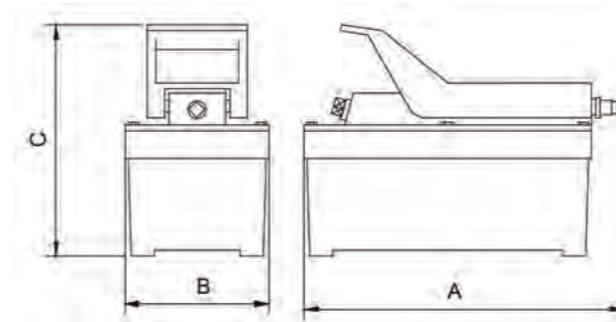

specifications	AHS 1400 FS
art no	100.602.001
max. working pressure	bar/Mpa 720 / 72
output unloaded	cc/min 960
output loaded	cc/min 410
air consumption unloaded	l/min 700
air consumption loaded	l/min 580
capacity oil tank (effective)	cc 1400
max. air pressure	bar/Mpa 8.5 / 0.8
connection	3/8" NPT female
operator type	air
suitable for (tool type)	single acting
weight, ready for use	kg 6.5
temperature range	°C -20 + 55
dimension (AxBxC)	mm 282 x 128 x 200

Features & benefits

- Usable at any place because of compact construction
- Lightweight
- Safe; when the air pressure is lost, the oil pressure is maintained
- Spark-free; suitable for explosive rooms
- Low-noise because of built-in silencer
- Energy-saving; stops as soon as the maximum pressure has been reached

Standard supplied with

- Compressed air connector

Hydraulic hoses	98
Pressure gauges	101
Valve blocks 'FlowPanel'	104




EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



COMPACT AIR PUMP | double-acting

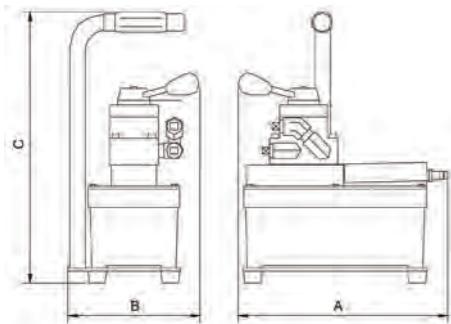

specifications	AHS 1400 D
art no	100.602.002
max. working pressure	bar/Mpa 720 / 72
output unloaded	cc/min 960
output loaded	cc/min 410
air consumption unloaded	l/min 700
air consumption loaded	l/min 580
capacity oil tank (effective)	cc 1400
max. air pressure	bar/Mpa 8.5 / 0.8
connection	3/8" NPT female
operator type	air
suitable for (tool type)	double acting
weight, ready for use	kg 9.6
temperature range	°C -20 + 55
dimension (AxBxC)	mm 315 x 180 x 372

Features & benefits


- Usable at any place because of compact construction
- Lightweight
- Spark-free; suitable for explosive rooms
- Low-noise because of built-in silencer
- Energy-saving; stops as soon as the maximum pressure has been reached
- Unsuitable for lifting applications, because the pump has no load holding valve

Standard supplied with

- Compressed air connector

Hydraulic hoses	98
Pressure gauges	101
Valve blocks 'FlowPanel'	104

COMPACT ELECTRIC PUMP

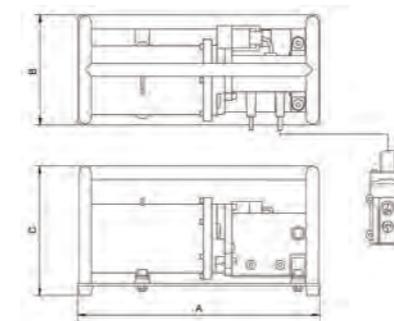

specifications	EHW 1650 RC
art no	100.551.001
max. working pressure	bar/Mpa 720 / 72
first stage output / min.	cc 2000
second stage output / min.	cc 250
capacity oil tank (effective)	cc 1650
connection	3/8" NPT female
engine	230 VAC - 0.35 kW - 50 Hz - 1 Ph
charge remote control	V 15
weight, ready for use	kg 11.6
dimension (AxBxC)	mm 416 x 190 x 222

Features & benefits

- Usable at any place because of compact construction
- Lightweight
- For both horizontal and vertical use
- Perfectly suitable for cable cutters and nut crackers
- Suitable for single-acting tools and cylinders
- With option 3 the pump is suitable for lifting applications

Standard supplied with


- Waterproof (IP 54) Remote Control with 2.3 m long electric cord

Additional information

- Option 1: Needle valve for controlled oil return (art no 100.182.157)
- Option 2: Pressure gauge for reading the pressure (art no 100.182.158)
- Option 3: Needle valve and pressure gauge (art no 100.182.162)



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

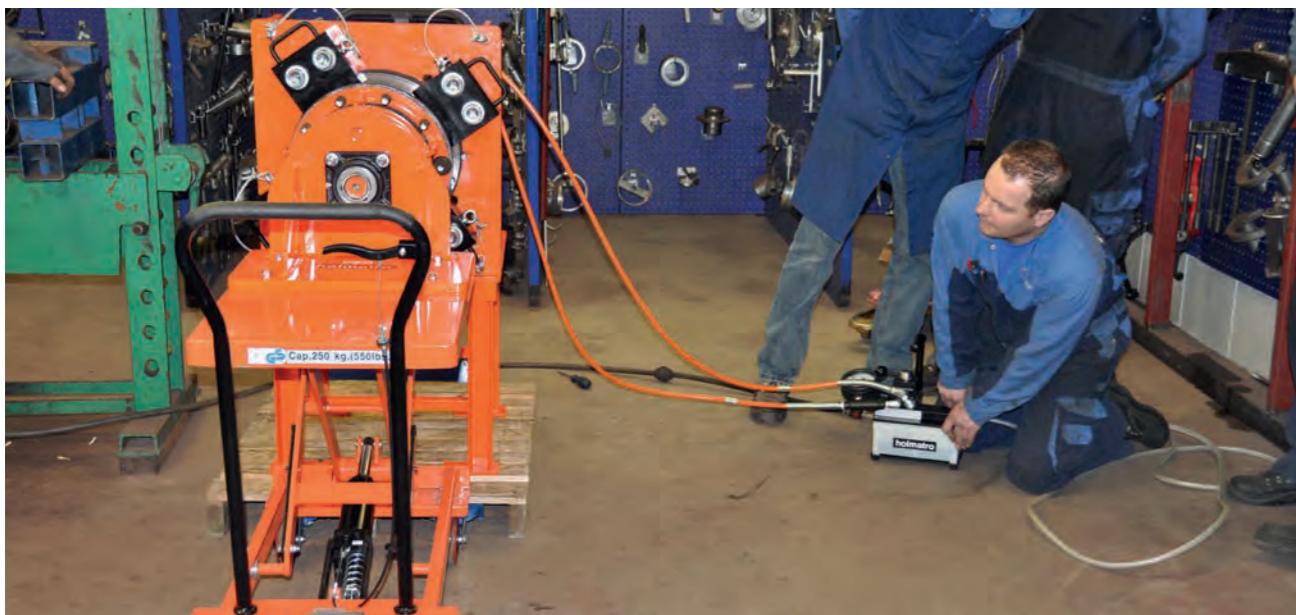

5-step plan for selection of vari pumps

Step 1

Select the power source.

- Air motor
- Electric motor (230 V - 1 ph - 50 Hz)
- Electric motor (400 V - 3 ph - 50 Hz)
- Petrol engine


Step 2

Select pump type.

- 1-stage
- 2-stage for higher operating speed
- Twin, with 2 independant outlets


Step 3

Select the correct content for the oil tank.

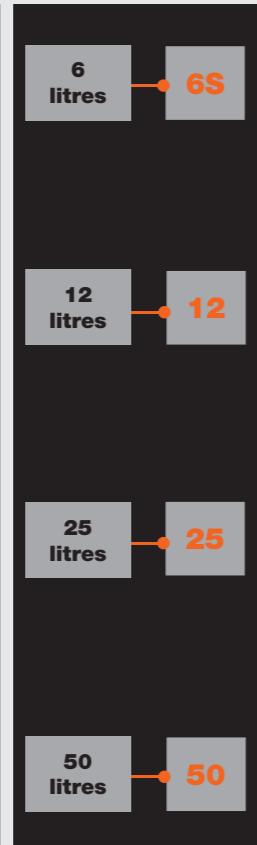

Step 4

Select the correct pump output in litres per minute.

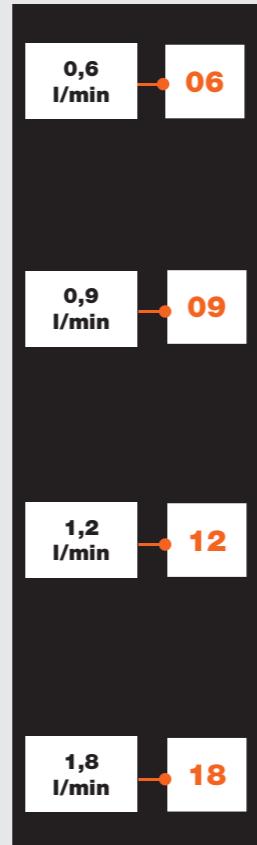

Step 5


Select the correct control valve (for twin pumps 2 valves required).

For single-acting tools:

- M 311 (hand operation)

For double-acting tools:

- M 322 (hand operation)
- M 323 (hand operation with deadman's handle)
- M 325 (air-powered operation)
- M 326 (electro-magnetic operation)

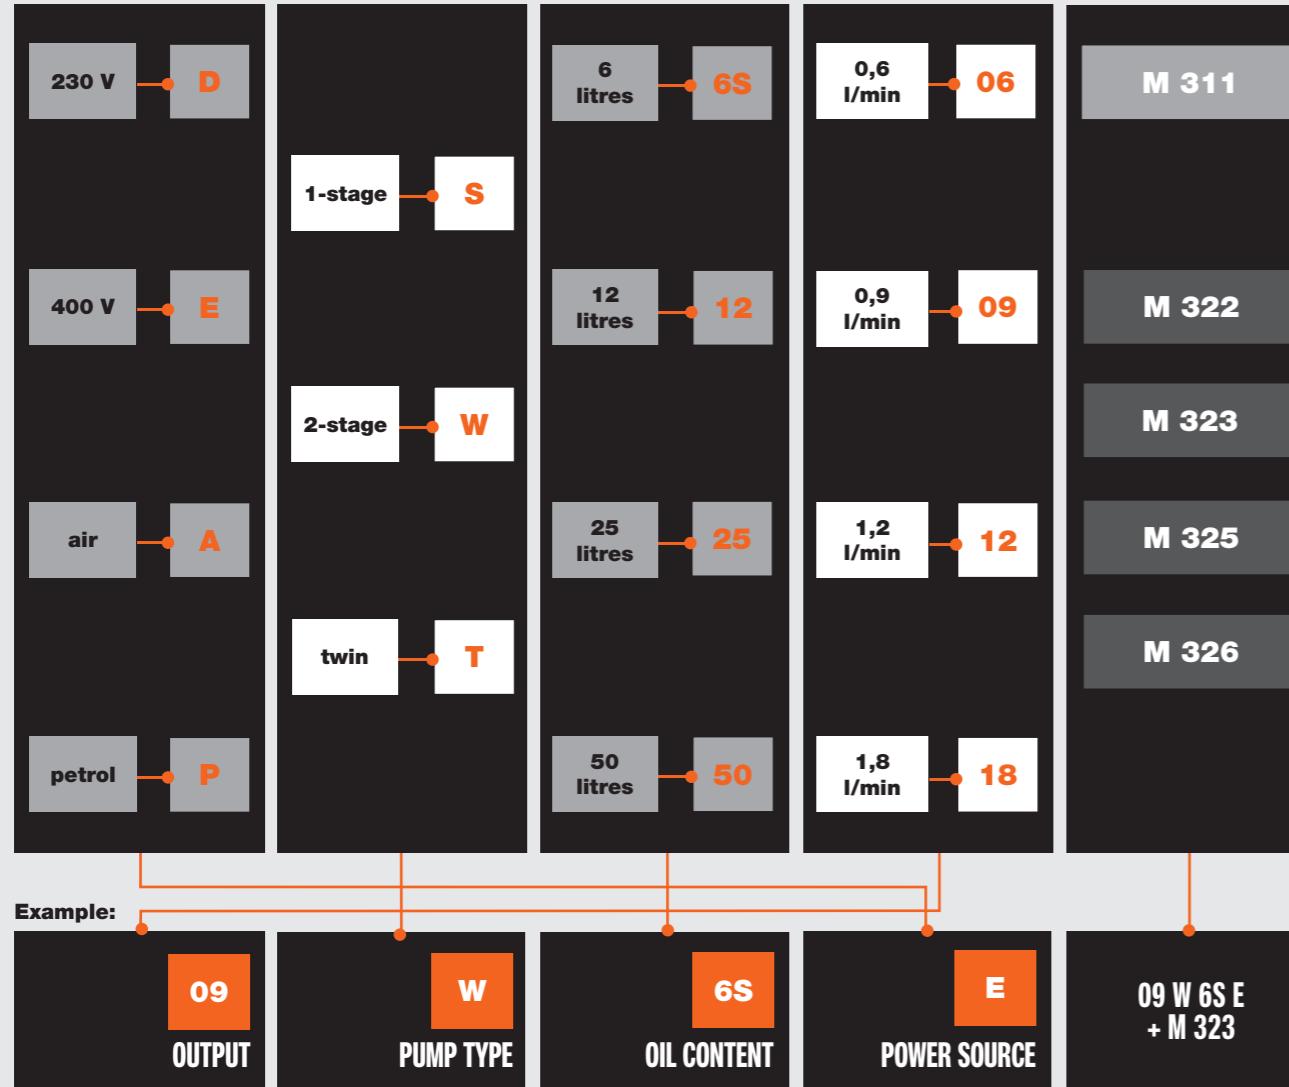

YOU NOW HAVE A FUNCTIONAL PUMP

Do not forget to specify the couplers and/or hoses

Control valves	94
Accessories	95
Hydraulic hoses	98
Pressure gauges	101



Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve

Available on request

- Larger tank
- Other voltages / frequencies

specifications	06 S 6 SD	06 S 12 D	09 S 6 SD	09 S 12 D	09 S 25 D	09 S 50 D
art no	100.152.012	100.152.013	100.152.015	100.152.016	100.152.017	100.152.018
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	6000	12000	25000
first stage output / min.	cc	600	600	900	900	900
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type	electric motor					
engine	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph
weight, ready for use	kg	36.0	44.0	38.0	46.0	65.0
dimensions (LxWxH)	mm	400 x 300 x 411	400 x 300 x 541	400 x 300 x 541	500 x 380 x 541	500 x 380 x 676

specifications	12 S 6 SD	12 S 12 D	12 S 25 D	12 S 50 D
art no	100.152.020	100.152.021	100.152.022	100.152.023
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	25000
first stage output / min.	cc	1200	1200	1200
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type	electric motor	electric motor	electric motor	electric motor
engine	230 VAC - 1.5 kW - 50 Hz - 1 Ph	230 VAC - 1.5 kW - 50 Hz - 1 Ph	230 VAC - 1.5 kW - 50 Hz - 1 Ph	230 VAC - 1.5 kW - 50 Hz - 1 Ph
weight, ready for use	kg	38.0	46.0	65.0
dimensions (LxWxH)	mm	400 x 300 x 411	400 x 320 x 541	500 x 380 x 541

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



VARI PUMPS | 230V - 2-stage



Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve


Available on request

- Larger tank
- Other voltages / frequencies

specifications	06 W 6 SD	06 W 12 D	09 S W SD	09 W 12 D	09 W 25 D	09 W 50 D
art no	100.152.025	100.152.026	100.152.028	100.152.029	100.152.030	100.152.031
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	6000	12000	25000
first stage output / min.	cc	1600	1600	2500	2500	2500
second stage output / min.	cc	600	600	900	900	900
first stage pressure range	bar/Mpa	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20
second stage pressure range	bar/Mpa	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72
operator type		electric motor				
engine		230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph	230 VAC - 1.1 kW - 50 Hz - 1 Ph
weight, ready for use	kg	38.0	46.0	40.0	48.0	67.0
dimensions (LxWxH)	mm	400 x 300 x 441	400 x 300 x 541	400 x 300 x 441	400 x 300 x 541	500 x 680 x 541
						500 x 380 x 676

specifications	12 W 6 SD	12 W 12 D	12 W 25 D	12 W 50 D
art no	100.152.033	100.152.034	100.152.035	100.152.036
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	25000
first stage output / min.	cc	3200	3200	3200
second stage output / min.	cc	1200	1200	1200
first stage pressure range	bar/Mpa	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20
second stage pressure range	bar/Mpa	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72
operator type		electric motor	electric motor	electric motor
engine		230 VAC - 1.5 kW - 50 Hz - 1 Ph	230 VAC - 1.5 kW - 50 Hz - 1 Ph	230 VAC - 1.5 kW - 50 Hz - 1 Ph
weight, ready for use	kg	40.0	48.0	67.0
dimensions (LxWxH)	mm	400 x 300 x 411	400 x 300 x 541	500 x 380 x 541
				500 x 380 x 676

VARI PUMPS | 400V - 1-stage

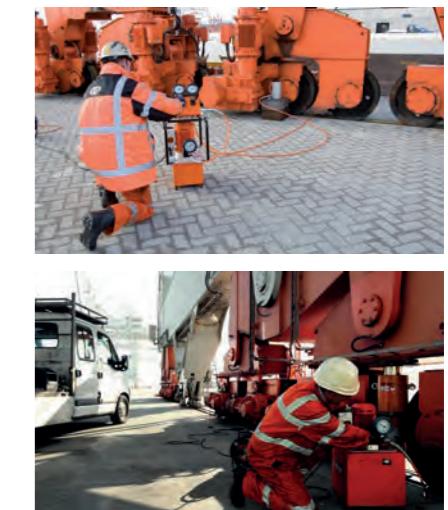

Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve

Available on request

- Larger tank
- Other voltages / frequencies

Control valves	94
Accessories	95
Hydraulic hoses	98
Pressure gauges	101
Valve blocks 'FlowPanel'	104

specifications	06 S 6 SE	06 S 12 E	09 S 6 SE	09 S 12 E	09 S 25 E	12 S 6 SE
art no	100.152.038	100.152.039	100.152.041	100.152.042	100.152.043	100.152.046
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	6000	12000	25000
first stage output / min.	cc	600	600	900	900	1200
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type		electric motor				
engine		400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph
weight, ready for use	kg	33.0	41.0	36.0	44.0	63.0
dimensions (LxWxH)	mm	400 x 300 x 441	400 x 300 x 541	400 x 300 x 441	500 x 380 x 541	500 x 380 x 541
					400 x 300 x 441	

specifications	12 S 12 E	12 S 25 E	12 S 50 E	18 S 12 E	18 S 25 E	12 S 6 SE
art no	100.152.047	100.152.048	100.152.049	100.152.050	100.152.051	100.152.052
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	6000	12000	25000
first stage output / min.	cc	600	600	900	900	1200
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type		electric motor				
engine		400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 2.2 kW - 50 Hz - 3 Ph	400 VAC - 2.2 kW - 50 Hz - 3 Ph
weight, ready for use	kg	43.0	62.0	92.0	45.0	64.0
dimensions (LxWxH)	mm	400 x 300 x 541	500 x 380 x 676	500 x 380 x 541	500 x 380 x 541	500 x 380 x 676

 **PAVLÍNEK®**
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



VARI PUMPS | 400V - 2-stage



Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve


Available on request

- Larger tank
- Other voltages / frequencies

specifications	06 W 6 SE	06 W 12 E	09 S W SE	09 W 12 E	09 W 25 E	12 W 6 SE
art no	100.152.054	100.152.055	100.152.057	100.152.058	100.152.059	100.152.062
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	6000	12000	25000
first stage output / min.	cc	1600	1600	2500	2500	3200
second stage output / min.	cc	600	600	900	900	1200
first stage pressure range	bar/Mpa	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20
second stage pressure range	bar/Mpa	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72
operator type		electric motor				
engine		400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.1 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph
weight, ready for use	kg	35.0	43.0	38.0	46.0	65.0
dimensions (LxWxH)	mm	400 x 300 x 441	400 x 300 x 541	400 x 300 x 441	400 x 300 x 541	500 x 380 x 541
		400 x 300 x 441	400 x 300 x 541	400 x 300 x 441	400 x 300 x 541	400 x 300 x 441

specifications	12 W 12 E	12 W 25 E	12 W 50 E	18 W 12 E	18 W 25 E	18 W 50 E
art no	100.152.063	100.152.064	100.152.065	100.152.066	100.152.067	100.152.068
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	12000	25000	50000	12000	25000
first stage output / min.	cc	3200	3200	3200	5000	5000
second stage output / min.	cc	1200	1200	1200	1800	1800
first stage pressure range	bar/Mpa	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20
second stage pressure range	bar/Mpa	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72	200-720 / 0-72
operator type		electric motor				
engine		400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 2.2 kW - 50 Hz - 3 Ph	400 VAC - 2.2 kW - 50 Hz - 3 Ph
weight, ready for use	kg	45.0	64.0	94.0	47.0	96.0
dimensions (LxWxH)	mm	400 x 300 x 541	500 x 380 x 541	500 x 380 x 676	400 x 300 x 541	500 x 380 x 676
		400 x 300 x 541	500 x 380 x 541	500 x 380 x 676	400 x 300 x 541	500 x 380 x 676

VARI PUMPS | Twin - 400V - 1-stage

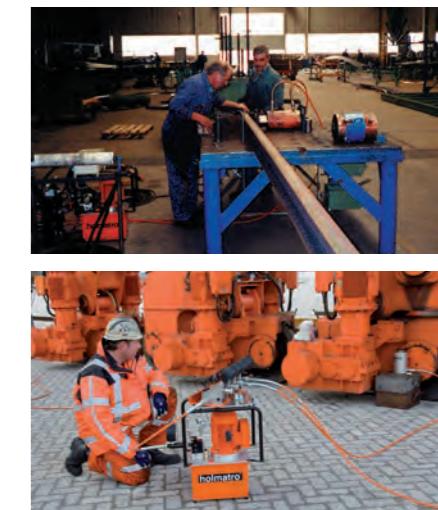

Features & benefits

- Pump with 2 separate outlets
- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve

Available on request

- Larger tank
- Other voltages / frequencies

Control valves	94
Accessories	95
Hydraulic hoses	98
Pressure gauges	101
Valve blocks 'FlowPanel'	104

specifications	06 T 6 SE	06 T 12 E	09 T 12 E	09 T 25 E	09 T 50 E
art no	100.152.070	100.152.071	100.152.072	100.152.073	100.152.074
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	12000	25000
first stage output / min.	cc	600	600	900	900
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type		electric motor	electric motor	electric motor	electric motor
engine		400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 1.5 kW - 50 Hz - 3 Ph	400 VAC - 2.2 kW - 50 Hz - 3 Ph	400 VAC - 2.2 kW - 50 Hz - 3 Ph
weight, ready for use	kg	40.0	47.0	52.0	71.0
dimensions (LxWxH)	mm	400 x 300 x 441	400 x 300 x 541	400 x 300 x 541	500 x 380 x 676


PAVLÍNEK®
 VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
 TEL: +420 595 693 911
 ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
 IČ: 25358511 DIČ: CZ25358511



VARI PUMPS | air - 1-stage - 8 bars



Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve


Available on request

- Larger tank
- Other voltages / frequencies

specifications	12 S 6 SA	12 S 12 A	12 S 25 A	12 S 50 A	18 S 12 A	18 S 25 A
art no	100.162.018	100.162.019	100.162.020	100.162.022	100.162.023	100.162.024
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	25000	50000	12000
first stage output / min.	cc	1300	1300	1300	2000	2000
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type		air	air	air	air	air
engine		8 bars - 3.0 kW				
weight, ready for use	kg	33.0	41.0	60.0	89.0	42.0
dimensions (LxWxH)	mm	400 x 300 x 348	400 x 300 x 448	500 x 380 x 448	500 x 380 x 583	400 x 300 x 448

specifications	18 S 50 A
art no	100.162.025
max. working pressure	bar/Mpa
capacity oil tank (effective)	cc
first stage output / min.	cc
first stage pressure range	bar/Mpa
operator type	
engine	
weight, ready for use	kg
dimensions (LxWxH)	mm

VARI PUMPS | air - 2-stage - 8 bars

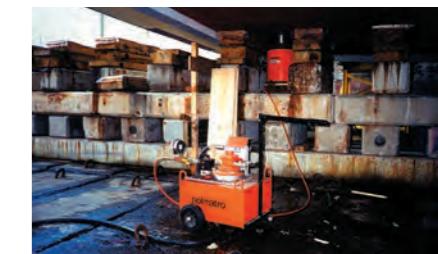

Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve

Available on request

- Larger tank
- Other voltages / frequencies

specifications	12 W 6 SA	12 W 12 A	12 W 25 A	12 W 50 A	18 W 12 A	18 W 25 A
art no	100.162.027	100.162.028	100.162.029	100.162.030	100.162.032	100.162.033
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	25000	50000	12000
first stage output / min.	cc	3600	3600	3600	5700	5700
second stage output / min.	cc	1300	1300	1300	2000	2000
first stage pressure range	bar/Mpa	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20
second stage pressure range	bar/Mpa	200-720 / 20-72	200-720 / 20-72	200-720 / 20-72	200-720 / 20-72	200-720 / 20-72
operator type		air	air	air	air	air
engine		8 bars - 3.0 kW				
weight, ready for use	kg	35.0	43.0	62.0	91.0	44.0
dimensions (LxWxH)	mm	400 x 300 x 348	400 x 300 x 448	500 x 380 x 448	500 x 380 x 583	400 x 300 x 448

specifications	18 W 50 A
art no	100.162.034
max. working pressure	bar/Mpa
capacity oil tank (effective)	cc
first stage output / min.	cc
second stage output / min.	cc
first stage pressure range	bar/Mpa
second stage pressure range	bar/Mpa
operator type	
engine	
weight, ready for use	kg
dimensions (LxWxH)	mm



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



VARI PUMPS | petrol - 1-stage - 4 stroke



Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve

Available on request

- Larger tank

specifications	12 S 6 SP	12 S 12 P	12 S 25 P	12 S 50 P	18 S 12 P	18 S 25 P
art no	100.162.002	100.162.003	100.162.004	100.162.005	100.162.006	100.162.007
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	25000	50000	12000
first stage output / min.	cc	1300	1300	1300	2000	2000
first stage pressure range	bar/Mpa	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72	0-720 / 0-72
operator type		petrol engine				
engine		4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW
weight, ready for use	kg	35.0	43.0	62.0	91.0	44.0
dimensions (LxWxH)	mm	400 x 300 x 462	400 x 300 x 562	500 x 380 x 562	500 x 380 x 697	400 x 300 x 562

specifications	18 S 50 P
art no	100.162.008
max. working pressure	bar/Mpa
capacity oil tank (effective)	cc
first stage output / min.	cc
first stage pressure range	bar/Mpa
operator type	
engine	
weight, ready for use	kg
dimensions (LxWxH)	mm

VARI PUMPS | petrol - 2-stage - 4 stroke



Features & benefits

- Safe
 - In case of a power failure, the oil pressure is maintained
 - Protected against pressure drop by pressure-controlled non-return valve
- Excluding single-acting or double-acting control valve

Available on request








- Larger tank

specifications	12 W 6 SP	12 W 12 P	12 W 25 P	12 W 50 P	18 W 12 P	18 W 25 P
art no	100.162.010	100.162.011	100.162.012	100.162.013	100.162.014	100.162.015
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
capacity oil tank (effective)	cc	6000	12000	25000	50000	12000
first stage output / min.	cc	3600	3600	3600	5700	5700
second stage output / min.	cc	1300	1300	1300	2000	2000
first stage pressure range	bar/Mpa	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20	0-200 / 0-20
second stage pressure range	bar/Mpa	200-720 / 20-72	200-720 / 20-72	200-720 / 20-72	200-720 / 20-72	200-720 / 20-72
operator type		petrol engine				
engine		4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW	4 stroke - 4.2 HP - 3.1 kW
weight, ready for use	kg	37.0	45.0	64.0	93.0	46.0
dimensions (LxWxH)	mm	400 x 300 x 462	400 x 300 x 562	500 x 380 x 562	500 x 380 x 697	400 x 300 x 562

specifications	18 W 50 P
art no	100.162.016
max. working pressure	bar/Mpa
capacity oil tank (effective)	cc
first stage output / min.	cc
second stage output / min.	cc
first stage pressure range	bar/Mpa
second stage pressure range	bar/Mpa
operator type	
engine	
weight, ready for use	kg
dimensions (LxWxH)	mm



CONTROL VALVES

hand pumps	hydraulic diagram	description	model	art no
		Control valve • Suitable for double-acting tools • Handle stops in each position • With pressure controlled non-return valves for securing the load • 4-way, 3-position • Connection: 3/8" NPT female (2x) • Max. working pressure: 720 bar	VM 43 L	100.182.175
		Control Valve • Suitable for single-acting tools • Handle stops in each position • 3-way, 3-position • Not in combination with a vari pump model (name) starting with 18 W • Connection 3/8" NPT female thread (2x) • Max. working pressure: 720 bar	M 311	100.181.311
		Control Valve • Suitable for double-acting tools • Handle stops in each position • With pressure-controlled non-return valves for securing the load • 4-way, 3-position • Connection: 3/8" NPT female (2x) • Max. working pressure: 720 bar	M 322	100.181.322
		Control Valve • Suitable for double-acting tools • Handle with dead man's function, automatically goes to "O" position • With pressure-controlled non-return valves for securing the load • 4-way, 3-position • Connection: 3/8" NPT female (2x) • Max. working pressure: 720 bar	M 323	100.181.323
		Control Valve • Suitable for double-acting tools • Handle with dead man's function, automatically goes to "O" position • With pressure-controlled non-return valves for securing the load • 4-way, 3-position • Connection: 3/8" NPT female (2x) • Max. working pressure: 720 bar	M 325	100.181.325
		Control Valve • Only suitable in combination with EC-version Vari pumps. Contact our sales department for additional information • Suitable for double-acting tools. Valve with electromagnetic control (24 VDC) • With non-return valves for securing the load • 3-position, 4-way valve • Connection: 3/8" NPT female (2x) • Remote control, art no 100.151.060 (to be ordered separately). 4 buttons (on, off, lift and lower) • Max. working pressure: 720 bar	M 326	100.182.321
		Single/double-acting valve • For assembly on the varipump underneath a double-acting valve (M 322, M 323, M324 or M 325) • This valve makes it possible to drive both single and double acting tools with just one pump • Switch with A + B function (double-acting) or A (single-acting) • Max. working pressure: 720 bar	M 304	100.172.051

ACCESSORIES

hand pumps	description	model	art no
	Foot plate set • Suitable for PA 09 pumps	-	100.182.218
	Foot plate set • Suitable for PA 18/38 pumps	-	100.182.217
	Foot plate set • Suitable for PA 18/38 pumps including VM 43 L valve	-	100.182.219
	Connecting plate • For remote or separately from the pump placing of the valves M 311, M 322, M 323, M 324 or M 325 (if necessary combined with pressure control valve M 303) • Connection: 1/4" BSP female • Max. working pressure: 720 bar	M 302	100.181.302
	Connecting block • For mounting couplers or hoses • To be mounted on the pump when using connecting plate M 302 instead of control valve • Provided with pressure relief valve • Connection: 1/4" BSP female (2x), 3/8" NPT female (1x) • Mounting of pressure gauge A 500 possible using nipple 100.581.104 • Mounting pressure gauge A 150 possible using nipple 100.581.128 • Max. working pressure: 720 bar	M 301 B	100.182.088
	Pressure Control Valve • For mounting unto the Pump or unto the connecting plate M 302 (below the connecting block M 301 or below the Valves M 311, M 322, M 323, M 324 or M 325) • Pressure adjustable between 20 and 720 Bars • Max. working pressure: 720 bar	M 303	100.181.303
	Protection frame for 6, 12, 25 and 50 liter pumps	-	100.151.056
	Cover plate for protection frame	-	100.151.040
	Carrying handle set for 6 and 12 litre pumps	-	100.151.053



SYSTEM COMPONENTS

ACCESSORIES

vari pumps	description	model	art no
	Carrying handle set for 25 and 50 litre pumps	-	100.151.054
	Set of wheels for 25 and 50 litre pumps	-	100.151.039
	Carriage-frame for 6, 12, 25 and 50 litre pumps	-	100.151.038
	Silencer for air vari pumps	HSR 0.5 U	100.182.015
	Air treatment set for air Vari pump (separately delivered)	A 181 U	100.582.181
	Air treatment set for air vari pump (to be mounted)	-	100.161.003



HYDRAULIC HOSES | single hoses



Features & benefits

- Anti-kink springs on both sides
- 4:1 safety ratio

Available on request

- Different lengths
- Other colors

specifications	H 1 SO	H 2 SO	H 3 SO	H 4 SO	H 5 SO	H 6 SO
art no	100.571.101	100.571.102	100.571.103	100.571.104	100.571.105	100.571.106
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
color	orange	orange	orange	orange	orange	orange
hose connection A	3/8" NPT male					
hose connection B	3/8" NPT male					
length	m	1	2	3	4	5
						6

specifications	H 8 SO	H 10 SO	H 15 SO	H 20 SO
art no	100.571.108	100.571.110	100.571.115	100.571.120
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72
color	orange	orange	orange	orange
hose connection A	3/8" NPT male	3/8" NPT male	3/8" NPT male	3/8" NPT male
hose connection B	3/8" NPT male	3/8" NPT male	3/8" NPT male	3/8" NPT male
length	m	8	10	15
				20

HYDRAULIC HOSES | standard hoses



Features & benefits

- Anti-kink springs on both sides
- 4:1 safety ratio

Available on request

- Different lengths
- Other colors

specifications	H 1 SOU	H 2 SOU	H 3 SOU	H 4 SOU	H 5 SOU	H 6 SOU
art no	100.572.101	100.572.102	100.572.103	100.572.104	100.572.105	100.572.106
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
color	orange	orange	orange	orange	orange	orange
hose connection A	3/8" NPT male					
hose connection B	A 119					
length	m	1	2	3	4	5
						6

specifications	H 8 SOU	H 10 SOU	H 15 SOU	H 20 SOU
art no	100.572.108	100.572.110	100.572.115	100.572.120
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72
color	orange	orange	orange	orange
hose connection A	3/8" NPT male	3/8" NPT male	3/8" NPT male	3/8" NPT male
hose connection B	A 119	A 119	A 119	A 119
length	m	8	10	15
				20



HYDRAULIC HOSES | extension hoses



Features & benefits

- Anti-kink springs on both sides
- 4:1 safety ratio

Available on request

- Different lengths
- Other colors

specifications	VL 1 SOU	VL 2 SOU	VL 3 SOU	VL 5 SOU	VL 10 SOU	VL 15 SOU
art no	100.572.301	100.572.302	100.570.294	100.572.305	100.572.310	100.572.315
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
color	orange	orange	orange	orange	orange	orange
hose connection A	A 119					
hose connection B	A 118					
length	m	1	2	3	5	10
						15

specifications	VL 20 SOU
art no	100.572.320
max. working pressure	bar/Mpa
color	orange
hose connection A	A 119
hose connection B	A 118
length	m
	20

HYDRAULIC HOSES | non-conductive single hoses



Features & benefits

- Anti-kink protection on both sides
- 4:1 safety ratio

Available on request

- Different lengths
- Other colors

specifications	H 2 MNC	H 5 MNC	H 10 MNC
art no	100.570.251	100.999.266	100.570.252
max. working pressure	bar/Mpa	720 / 72	720 / 72
color	orange	orange	orange
hose connection A	3/8" NPT male	3/8" NPT male	3/8" NPT male
hose connection B	3/8" NPT male	3/8" NPT male	3/8" NPT male
length	m	2	5
			10





couplers	description	model	art no
	High Flow Coupler, female, including steel dust cap • Connection: 3/8" NPT, male • Fits: A 119 • Max. working pressure: 720 bar	A 118	100.181.118
	High Flow Coupler, male, including steel dust cap • Connection: 3/8" NPT, female • Fits: A 118, A 134 N and A 418 • Max. working pressure: 720 bar	A 119	100.181.119
	High Flow Coupler, female, like A 118, with built-in pressure relief Valve • Adjusted to ca. 750 Bars • Connection: 3/8" NPT, male • Fits: A 119 • Max. working pressure: 720 bar	A 418	100.181.418
	High flow coupler, female, like A 118, with built-in-non-return valve • Suitable for hose rupture security • Not to be used with double-acting systems • Connection: 3/8" NPT, male • Fits: A 119 • Max. working pressure: 720 bar	A 134 N	100.181.434
	High Flow Coupler, female, including dust cap • Connection: 3/8" NPT, male • Fits: A 119 SS • Material: stainless steel AISI 316 • This coupler cannot be assembled on aluminium parts because of contact corrosion! • Max. working pressure: 720 bar	A 118 SS	100.002.499
	High Flow Coupler, male, including dust cap • Connection: 3/8" NPT, female • Fits: A 118 SS • Material: stainless steel AISI 316 • This coupler cannot be assembled on aluminium parts because of contact corrosion! • Max. working pressure: 720 bar	A 119 SS	100.002.500
	Loose steel dust cap • With fixing thread • Fits: A 118 • Max. working pressure: 720 bar	A 118 SK	100.181.828
	Loose steel dust cap • With fixing thread • Fits: A 119 • Max. working pressure: 720 bar	A 119 SK	100.181.829
	Loose dust cap • With fixing thread • Fits: A 118 SS • Material: stainless steel AISI 316 • Max. working pressure: 720 bar	A 118 SK SS	100.002.503
	Loose dust cap • With fixing thread • Fits: A 119 SS • Material: stainless steel AISI 316 • Max. working pressure: 720 bar	A 119 SK SS	100.002.504

couplers	description	model	art no
	Relief valve • For reducing any remnant pressure • Suitable for: A 118 • Max. working pressure: 720 bar	A 118	100.181.840
	Relief valve • For reducing any remnant pressure • Suitable for: A 119 • Max. working pressure: 720 bar	A 119	100.181.841

PRESSURE GAUGES | scale division in ton



Features & benefits

- Pointer damped with glycerine
- Stainless steel
- Housing Ø 100 mm
- Connection: 1/2" NPT male

specifications	A 501	A 502	A 503	A 504	A 505	A 506
art no	100.582.501	100.582.502	100.582.503	100.582.504	100.582.505	100.582.506
1st scale range	t 5	25	52	105	210	509
2nd scale range	t 11	33	77	160	305	382
3rd scale range	t 21	51				
1st scale division per mark	kg 100.0	500.0	1000.0	2000.0	5000.0	10000.0
2nd scale division per mark	kg 200.0	500.0	1000.0	2000.0	5000.0	10000.0
3rd scale division per mark	kg 500.0	1000.0				
connection	1/2" NPT male					
material	stainless steel					
housing diameter	mm 100	100	100	100	100	100

specifications	A 507	A 508	A 509	A 510
art no	100.582.507	100.582.508	100.582.509	100.582.510
1st scale range	t 6	30	63	12
2nd scale range	t 12	47	104	31
3rd scale range	t 23	63		63
4th scale range	t 113			98
1st scale division per mark	kg 100.0	500.0	1000.0	200.0
2nd scale division per mark	kg 200.0	1000.0	2000.0	500.0
3rd scale division per mark	kg 500.0	1000.0		2000.0
4th scale division per mark	kg 2000.0			2000.0
connection	1/2" NPT male	1/2" NPT male	1/2" NPT male	1/2" NPT male
material	stainless steel	stainless steel	stainless steel	stainless steel
housing diameter	mm 100	100	100	100

PRESSURE GAUGES | scale division in bars

pressure gauges	description	model	art no
	Universal pressure gauge • 0 - 720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 100 mm • Connection: 1/2" NPT male	A 500	100.582.500
	Rubber protection cover • Suitable for Ø 100 mm pressure gauges	-	350.581.160
	Pressure gauge • 0 - 720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 60 mm • Connection: 1/4" NPT male	A 150	100.581.036
	Rubber protection cover • Suitable for Ø 60 mm pressure gauges	-	350.581.152
	Pressure gauge digital • 0 - 1000 Bars • Peak pressure memory • Connection: 1/4" BSP male	-	150.581.091

PRESSURE GAUGES | adaptors

pressure gauges	description	model	art no
	Pressure gauge connecting block for vari pumps • Suitable for single-acting control Valve M 311 • Provided with: 1 x 3/8" NPT female, 1 x 3/8" NPT male and 1/2" NPT female for pressure gauge • Pressure gauge can be placed in an angle of 45° using Elbow, art no 100.581.240 • Max. working pressure: 720 bar	A 108	100.181.108
	Pressure gauge connecting block for vari pumps • Suitable for double-acting control valves M 322, M 323, M 324 and M 325 • Supplies pressure to port A or B, dependent on which is highest • Provided with: 1 x 1/2" NPT female • Max. working pressure: 720 bar	M 308	100.182.308

PRESSURE GAUGES | sets

pressure gauges	description	model	art no
	Pressure gauge set PA 04/09 pump • 0-720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 63 mm • Including rubber protection cover • Connection: 1/4" NPT male	-	100.182.213
	Pressure gauge set PA *8 pumps • 0-720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 63 mm • Including rubber protection cover • Connection: 1/4" NPT male	-	100.182.214
	Pressure gauge set PA pumps • 0-720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 100 mm • Including rubber protection cover • Connection: 1x 3/8" NPT female and 1x 3/8" NPT male	-	100.182.215
	Pressure gauge set VM 43 L valve • 0-720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 63 mm • Including rubber protection cover • Connection: 1/4" NPT male	-	100.182.216
	Plug-in type gauge set • 0-720 bars • Connection: couplers A 118 - A 119	A 111 U	100.582.111




EMAIL: OBCHOD@PAVLINEK.CZ
 TEL: +420 595 693 911
 ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
 IČ: 25358511 DIČ: CZ25358511



EMAIL: OBCHOD@PAVLINEK.CZ
 TEL: +420 595 693 911
 ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
 IČ: 25358511 DIČ: CZ25358511



VALVE BLOCKS 'FLOWPANEL' | single-acting

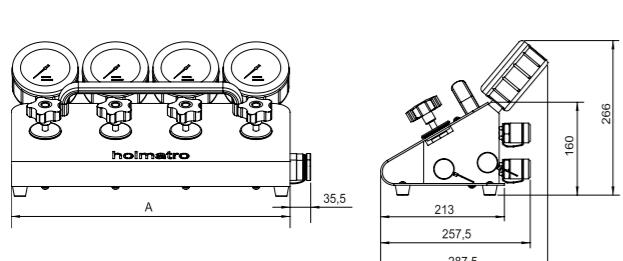

Features & benefits

- Excellent control over your load; extremely accurate regulation of oil flow under high pressure
- Safe; stable construction
- Ergonomic
 - Regulator valves with comfortable rotary knobs
 - Pressure gauges that are easy to read
 - Installation on vari pump is possible for comfortable working position
 - Carry-handle positioned above centre of gravity

Hydraulic hoses	98
Couplers	100
Pressure gauges	101


Available on request

- Can be mounted on the protection frame of the Vari pumps

specifications	HMS 2 A	HMS 2 B	HMS 2 C	HMS 4 A	HMS 4 B	HMS 4 C
art no	100.172.048	100.172.049	100.172.050	10.172.045	100.172.046	100.172.047
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
number of outlet ports		2	2	4	4	4
couplers		yes	yes		yes	yes
pressure gauges			yes			yes
weight, ready for use	kg	6.2	7.1	9.0	12.5	13.9
dimension A	mm	238	238	238	480	480

specifications	HMS 6 A	HMS 6 B	HMS 6 C
art no	100.172.052	100.172.053	100.172.054
max. working pressure	bar/Mpa	720 / 72	720 / 72
number of outlet ports		6	6
couplers		yes	yes
pressure gauges			yes
weight, ready for use	kg	18.5	20.5
dimension A	mm	722	722

VALVE BLOCKS 'FLOWPANEL' | double-acting

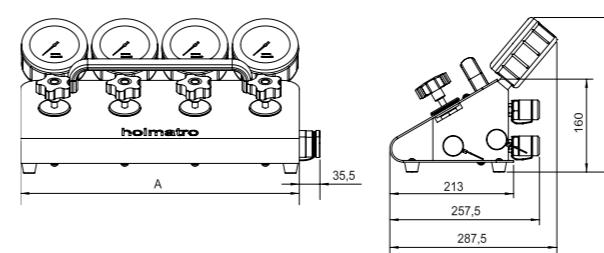

Features & benefits

- Excellent control over your load; extremely accurate regulation of oil flow under high pressure
- Safe; stable construction
- Ergonomic
 - Regulator valves with comfortable rotary knobs
 - Pressure gauges that are easy to read
 - Installation on vari pump is possible for comfortable working position
 - Carry-handle positioned above centre of gravity

Hydraulic hoses	98
Couplers	100
Pressure gauges	101

Available on request

- Can be mounted on the protection frame of the Vari pumps

specifications	HMD 2 A	HMD 2 B	HMD 2 C	HMD 4 A	HMD 4 B	HMD 4 C
art no	100.172.042	100.172.043	100.172.044	10.172.039	100.172.040	100.172.041
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
number of outlet ports		2	2	4	4	4
couplers		yes	yes		yes	yes
pressure gauges			yes			yes
weight, ready for use	kg	7.2	8.1	10.0	14.2	15.6
dimension A	mm	238	238	238	480	480

specifications	HMD 6 A	HMD 6 B	HMD 6 C
art no	100.172.055	100.172.056	100.172.057
max. working pressure	bar/Mpa	720 / 72	720 / 72
number of outlet ports		6	6
couplers		yes	yes
pressure gauges			yes
weight, ready for use	kg	21.0	23.0
dimension A	mm	722	722









EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



VALVES

valves	hydraulic diagram	description	model	art no
		Needle valve A 109 N • For accurate control of the oil flow, also under maximum pressure • Connection: 3/8" NPT female (2x) • Max. working pressure: 720 bar	A 109 N	100.581.609
		Ball valve • Very suitable for quick shut-off valve (open-close) • Can be operated under maximum pressure • Connection: 3/8" NPT female (2x) • Max. working pressure: 720 bar	A 195	100.581.200
		Needle valve A 130 • For accurate control of the oil flow, also under maximum pressure • Connection: 3/8" NPT male and 3/8" NPT female • Max. working pressure: 720 bar	A 130	100.181.130
		Breaking safety (load security) valve • Protects against sudden pressure drop in the supply pipe, for example in case of hose rupture • To be mounted between pump and cylinder as close to the cylinder as possible • Provided with pressure relief valve, set at 830 bars • While pumping: valve closed, safety valve active • For relief: open valve, safety valve not active • Connection: 3/8" NPT female and 3/8" NPT male • Max. working pressure: 720 bar	A 110	100.181.110
		High flow coupler, female, like A 118, with built-in-non-return valve • Suitable for hose rupture security • Not to be used with double-acting systems • Connection: 3/8" NPT, male • Fits: A 119 • Max. working pressure: 720 bar	A 134 N	100.181.434
		Non-Return Valve • Spring-loaded • Connection: 3/8" NPT male (2x) • Max. working pressure: 720 bar	A 209	100.581.209
		Pressure relief valve • Set to 750 bars • Connection: 1x 3/8" NPT female and 1x 3/8" NPT male • Max. working pressure: 720 bar	A 135	100.181.135


ACCESSORIES HYDRAULICS

accessories hydraulics	description	model	art no
	45° elbow with 1x 1/2" NPT female and 1x 1/2" NPT male • Max. working pressure: 720 bar	-	100.581.240
	Adjustable pin key, complete with 4 pairs of exchangeable pins • Max. working pressure: 720 bar	-	100.581.132
	Cross piece with 4x 3/8" NPT female • Max. working pressure: 720 bar	-	100.581.139
	T-piece with 3x 3/8" NPT female • Max. working pressure: 720 bar	-	100.001.010
	Y-piece with 3x 3/8" NPT female • Max. working pressure: 720 bar	-	100.182.104
	90° Elbow with 1x 3/8" NPT female and 1x 3/8" NPT male • Max. working pressure: 720 bar	-	100.581.113
	90° Elbow with 2x 3/8" NPT male • Max. working pressure: 720 bar	-	100.581.213
	45° Elbow with 1x 3/8" NPT female and 1x 3/8" NPT male • Max. working pressure: 720 bar	-	100.581.114
	90° bend with 1x 1/4" BSP female swivel Nut and 1x 1/4" BSP male • Max. working pressure: 720 bar	-	150.581.219
	Straight tube connector for 12 mm tube with 3/8" NPT male • Max. working pressure: 720 bar	-	100.581.136




ASSEMBLY MATERIALS | connection socket

accessories hydraulics	description	model	art no
	90° pipe connector for 12 mm tube with 3/8" NPT male • Max. working pressure: 720 bar	-	100.581.137
	Plug with 3/8" NPT • Max. working pressure: 720 bar	-	100.581.105
	Sealing ring for M12 • Max. working pressure: 720 bar	-	190.593.275
	Sealing ring for 1/4" BSP • Max. working pressure: 720 bar	-	150.581.230
	Sealing ring for M14 • Max. working pressure: 720 bar	-	190.593.075
	Sealing ring for M18 • Max. working pressure: 720 bar	-	100.581.158
	Manifold with 5 interconnected ports with 3/8" NPT female • Max. working pressure: 720 bar	A 125	100.181.125

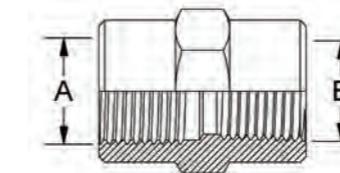

specifications	connection socket				
art no	100.581.238	150.581.228	100.181.227	100.581.102	100.181.228
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72
thread A		1/4" NPT	1/4" NPT	1/4" BSP	3/8" NPT
thread B		1/4" NPT	1/4" BSP	M18 x 1.5	3/8" NPT
					M18 x 1.5

ASSEMBLY MATERIALS | reducing bushing

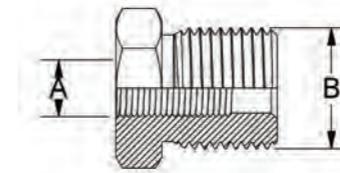

specifications	reducing bushing	reducing bushing	reducing bushing	reducing bushing
art no	100.581.128	100.581.103	100.581.133	150.581.085
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72
thread A		3/8" NPT	3/8" NPT	1/8" BSP
thread B		3/8" NPT	1/2" NPT	3/4" NPT
				1/2" BSP



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511




PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



ASSEMBLY MATERIALS | nipple

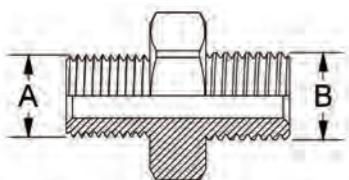


specifications	nipple	nipple	nipple	nipple	nipple	nipple
art no	110.013.004	150.581.227	110.013.044	100.581.211	100.181.156	150.581.216
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
thread A		1/8" NPT	1/4" NPT	1/4" BSP	1/4" BSP	1/4" BSP
thread B		3/8" NPT	1/4" BSP	M12 x 1.75	M14 x 1.5	M14 x 2

specifications	nipple	nipple	nipple	nipple	nipple	nipple
art no	150.581.218	100.581.101	100.181.151	150.581.088	110.013.005	150.581.244
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
thread A		1/4" BSP	3/8" NPT	1/2" BSP	1/4" BSP	1/4" NPT
thread B		3/8" NPT	3/8" NPT	M14 x 2	1/2" NPT	M10 x 1

specifications	nipple	nipple
art no	150.581.087	100.581.239
max. working pressure	bar/Mpa	720 / 72
thread A		1/2" BSP
thread B		3/8" NPT

ASSEMBLY MATERIALS | connector

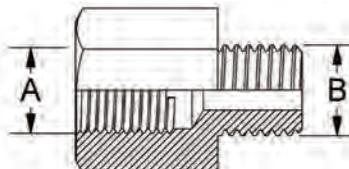

specifications	connector	connector	connector	connector	connector	connector
art no	100.181.223	100.581.235	100.181.159	150.581.217	100.581.107	100.181.153
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
thread A		1/4" BSP	1/4" BSP	3/8" NPT	3/8" NPT	3/8" NPT
thread B		1/4" NPT	3/8" BSP	M14 x 2	1/4" BSP	1/4" NPT

specifications	connector	connector	connector	connector	connector	connector
art no	100.581.104	100.181.129	150.581.058	100.181.154	100.181.157	100.181.047
max. working pressure	bar/Mpa	720 / 72	720 / 72	720 / 72	720 / 72	720 / 72
thread A		1/2" NPT	M14 x 1.5	M14 x 1.5	M18 x 1.5	1/4" NPT
thread B		3/8" NPT	3/8" NPT	1/4" BSP	3/8" NPT	1/4" BSP

specifications	connector
art no	150.000.398
max. working pressure	bar/Mpa
thread A	1/4" BSP
thread B	3/8" NPT

OILS

oils	description	model	art no
	Hydraulic oil ECO Power, DIN 51524.3 HVLP, bottle 1 litre • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro motor pumps	ISO VG 36 - 1L	180.000.857
	Hydraulic oil ECO Power, DIN 51524.3 HVLP, bottle 5 litres • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro motor pumps	ISO VG 36 - 5L	180.000.815
	Hydraulic oil ECO Power, DIN 51524.3 HVLP, drum 60 litres • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro motor pumps	ISO VG 36 - 60L	130.103.025
	Hydraulic oil ECO Power, DIN 51524.3 HVLP, drum 208 litres • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro motor pumps	ISO VG 36 - 208L	180.001.543
	Hydraulic oil ECO Power, DIN 51524.3 HVLP, bottle 1 litre • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro tools and hand pumps	ISO VG 15 - 1L	100.581.051
	Hydraulic OIL ECO Power, DIN 512524.3 HVLP, bottle of 5 litres • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro tools and hand pumps	ISO VG 15 - 5L	100.581.055
	Hydraulic OIL ECO Power, DIN 512524.3 HVLP, drum of 208 litres • Fully mineral oil • Optimum lubricating properties • Excellent protection against wear and corrosion • Up to 3x longer service life than the leading hydraulic oils • Standard oil for all Holmatro tools and hand pumps	ISO VG 15 - 208L	180.000.910
	Motor oil, API SJ/CH-4, bottle 0.6 litre • Very good detergent and dispersant • Optimum protection against wear, corrosion and foam • High and stable viscosity • Low sulphate ash content	0 W 30	150.581.103



LUBRICANTS

lubricants	description	model	art no
	Molykote® grease paste • For mounting and lapping of metal parts • Tube 100 g	-	100.581.081
	High-quality Molykote® grease • For metal / metal combinations at slow to fast movements with medium to heavy load • Cartridge 400 g	-	100.581.082
	Brake cleaner (degreaser) Motip® • For cleaning and pre-treatment of surfaces • Spray can 500 ml	-	890.000.025
	Teflon lubricating oil Sir John® • High-quality lubricant and maintenance oil • Spray can 400 ml	-	150.581.095
	Anti-friction coating Bel Ray® • Dry spray coating for protection under dusty, dirty and abrasive conditions • Spray can 400 ml	-	150.581.093

TENSIONING HYDRAULICS



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511




STUD TENSION CYLINDERS | selection chart

6-step plan for selection of stud tension cylinders

Step 1

Cylinder selection by bolt diameter.




stud tension cylinder bolt diameter - through to

	mm	inch
HHX 14	M20 - M22	3/4 - 7/8
HHX 22	M24 - M28	1 - 1 1/8
HHX 35	M30 - M34	1 1/4 - 1 3/8
HTX 50	M36 - M40	1 1/2 - 1 5/8
HTX 70	M42 - M46	1 3/4 - 1 7/8
HTX 100	M48 - M56	2 - 2 1/4
HTX 150	M60 - M68	2 1/2 - 2 3/4
HTX 180	M72 - M76	2 3/4 - 3
HTX 220	M76 - M80	3 - 3 1/4
HTX 260	M80 - M85	3 1/4 - 3 1/2

Step 2

Check height of threaded rod.




min. height of threaded rod above flange

	mm	ton	kN
28 + D	14	140	
30 + D	22	221	
35 + D	35	352	
55 + D	50	501	
65 + D	70	702	
70 + D	100	999	
90 + D	150	1500	
90 + D	180	1803	
85 + D	220	2174	
105 + D	260	2601	

Step 3

Check stud tension force.



max. pulling force

Step 4


Check cylinder dimensions




See table stud tension cylinders (pages 115-117)

Step 5


Assembly of a stud tension cylinder.




stud tension cylinder



cylinder bridge



pulling nut



nut socket



tommy bar

THREAD = thread type x pitch
(e.g. M36 x 4)

SLW = key size of nut (e.g. SLW 50)



Step 6

Additional items for connection or operation, based on the n-number of cylinders that are used in a coupled situation.

no	description	mention with order
n	Connection pieces	Connection pieces A 240 U, art no 110.582.240
n-1	Hoses between the cylinders	E.g. hose, model X 1.2 MU, art no 110.572.012 (see 'Hydraulic hoses', page 119)
2	Hoses to pump and pressure gauge	E.g. hose, model X 3 MU, art no 110.572.030 (see 'Hydraulic hoses', page 119)
1	Pump (hand or foot operated)	E.g. hand pump, model PAX 18 H 2, art no 110.142.005 (see 'Pump', page 118)
1	Pressure gauge	Pressure gauge A 148 U, art no 110.582.348 (see 'Couplers and accessories', page 120)

Recommendation with respect to the number of cylinders to be used: the best result is achieved with a 100% occupation. This means that every threaded rod is fitted with a stud tension cylinder and is tensioned simultaneously. A lower occupation level is possible. However, you must take account of the fact that the force is increased evenly and in steps along the contour of the object to be tensioned.

STUD TENSION CYLINDERS | including cylinder bridge

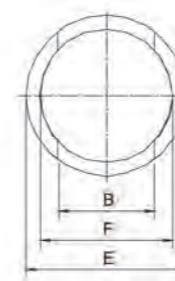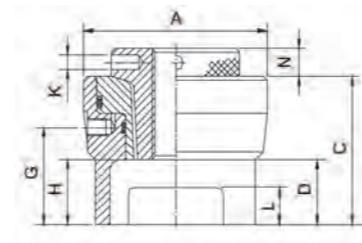

Features & benefits

- HHX-cylinders standard provided with cylinder seat
- Compact and lightweight
- Usable in all positions
- High-quality and refined chrome nickel steel
- Automatically locking quick coupler
- Pulling nut is manufactured in conformity with customer specifications based on exact thread and bolt dimensions
- Nut socket is manufactured in conformity with customer specifications based on exact key size of the nut
- Advantages compared with traditional stud tensioning methods
 - The effects of frictions are negligible; higher accuracy when tightening the bolt
 - Time-saving; several cylinders can be coupled for simultaneously tensioning several bolt connections

Accessories

- Pulling nut
- Nut socket
- Tommy bar

Pump	118
Hydraulic hoses	119
Couplers and accessories	120

Available on request

- Stud tension cylinders manufactured in conformity with customer specifications
- Extended pulling nut
- Heightened or lowered bridges (HTX)

specifications	HHX 14	HHX 22	HHX 85
art no	110.011.101	110.011.002	110.011.012
max. working pressure	bar/Mpa	1000 / 100	1000 / 100
stroke	mm	8	8
min. reach bolt		M20	M24
max. reach bolt		M22	M28
capacity	kN/t	140 / 14.3	221 / 22.5
required oil content (effective)	cc	11.2	17.7
weight, ready for use	kg	1.4	2.1
dimension A	mm	70	90
dimension B	mm	36	47
dimension C	mm	85	80
dimension D	mm	28	35
dimension E	mm	56	76
dimension F	mm	47	60
dimension G	mm	58	53
dimension H	mm	28	35
dimension K	mm	6	8
dimension L	mm	20	20
dimension N	mm	15	15




PAVLÍNEK®
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



STUD TENSION CYLINDERS | excluding cylinder bridge

STUD TENSIONING CYLINDERS

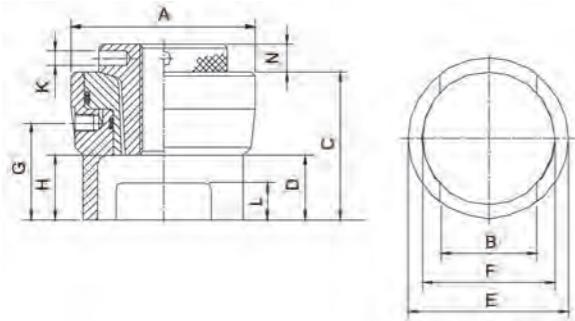

Features & benefits

- Compact and lightweight
- Usable in all positions
- High-quality and refined chrome nickel steel
- Automatically locking quick coupler
- Pulling nut is manufactured in conformity with customer specifications based on exact thread and bolt dimensions
- Nut socket is manufactured in conformity with customer specifications based on exact key size of the nut
- Advantages compared with traditional stud tensioning methods
 - The effects of frictions are negligible; higher accuracy when tightening the bolt
 - Time-saving; several cylinders can be coupled for simultaneously tensioning several bolt connections

Available on request

- Stud tension cylinders manufactured in conformity with customer specifications
- Extended pulling nut
- Heightened or lowered bridges (HTX)

specifications	HTX 50	HTX 70	HTX 100	HTX 150	HTX 180	HTX 220
art no	110.011.121	110.011.131	110.011.141	110.011.151	110.011.161	100.011.171
max. working pressure	bar/Mpa	1000 / 100	1000 / 100	1000 / 100	1000 / 100	1000 / 100
stroke	mm	12	12	12	12	12
min. reach bolt		M36	M42	M48	M60	M72
max. reach bolt		M40	M46	M56	M68	M76
capacity	kN/t	501 / 51.1	702 / 71.6	999 / 101.9	1500 / 153	1803 / 183.9
required oil content (effective)	cc	60.2	84.2	120	180	216
weight, ready for use	kg	3.4	4.6	6.8	10.9	14.0
dimension A	mm	119	139	166	203	220
dimension B	mm	60	56	65	79	85
dimension C	mm	102	107	120	139	150
dimension D	mm	55	60	70	85	90
dimension E	mm	96	111	125	154	174
dimension F	mm	83	94	112	136	148
dimension G	mm	67	72	82	98	103
dimension H	mm	45	50	60	75	80
dimension K	mm	8	10	10	12	12
dimension L	mm	20	25	30	35	40
dimension N	mm	15	20	20	25	30

Accessories

- Cylinder bridge
- Pulling nut
- Nut socket
- Tommy bar

Pump	118
Hydraulic hoses	119
Couplers and accessories	120


specifications	HTX 80
art no	110.011.181
max. working pressure	bar/Mpa
stroke	mm
min. reach bolt	M80
max. reach bolt	M85
capacity	kN/t
required oil content (effective)	cc
weight, ready for use	kg
dimension A	mm
dimension B	mm
dimension C	mm
dimension D	mm
dimension E	mm
dimension F	mm
dimension G	mm
dimension H	mm
dimension K	mm
dimension L	mm
dimension N	mm



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



PUMP

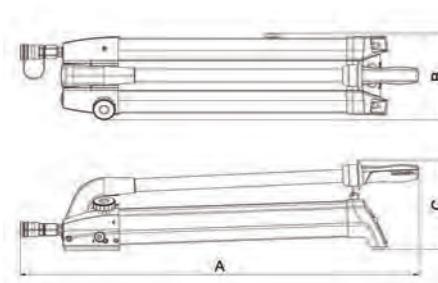

specifications	PAX 18 H 2
art no	110.142.005
max. working pressure	bar/Mpa 1000 / 100
capacity oil tank (effective)	cc 1800
capacity oiltank	cc 1990
1st stage output (per stroke)	cc 42.8
2nd stage output (per stroke)	cc 2.2
1st stage pressure range	bar/Mpa 0-45 / 0-4.5
2nd stage pressure range	bar/Mpa 45-1000 / 4.5-100
max. operating pressure	kg 34.0
connection	A 238
operator type	hand
weight, ready for use	kg 7.8
dimension A	mm 777
dimension B	mm 169
dimension C	mm 175

Features & benefits

- Ergonomic design
 - Light weight; easy to carry and operate
 - Low operating force required; minimal user effort
 - Soft-grip handles; more comfort and grip
 - Anti-slip rubber underneath; pump is stable and does not shift
 - Pump handle lock; easy and safe to carry
- Service- and maintenance-friendly; technical parts are easy to access and replace without removing the tank
- High oil output; quicker action both in the first and second stage
- Oil level glass in the tank; easily check the oil level in both horizontal and vertical position
- Integrated filler funnel; top up oil easily and quickly without extra accessories
- Push & Unlock pump handle lock; unlocking is quick and easy with one brief push on the pump handle

Hydraulic hoses 119
Couplers and accessories 120



HYDRAULIC HOSES | single hoses - 1000 bars

Features & benefits

- 4:1 safety ratio



specifications	X 1.3 M	X 3 M	X 5 M
art no	110.571.012	110.571.030	110.571.050
equipped with (connection type)	single hose	single hose	single hose
max. working pressure	bar/Mpa 1000 / 100	1000 / 100	1000 / 100
color	blue	blue	blue
hose connection A	1/4" BSP male	1/4" BSP male	1/4" BSP male
length	m 1.2	3	5


HYDRAULIC HOSES | extension hoses - 1000 bars

Features & benefits

- 4:1 safety ratio



specifications	X 1.2 MU	X 3 MU	X 5 MU
art no	110.572.012	110.572.030	110.572.050
equipped with (connection type)	single hose	single hose	single hose
max. working pressure	bar/Mpa 1000 / 100	1000 / 100	1000 / 100
color	blue	blue	blue
hose connection A	A 239	A 239	A 239
length	m 1.2	3	5

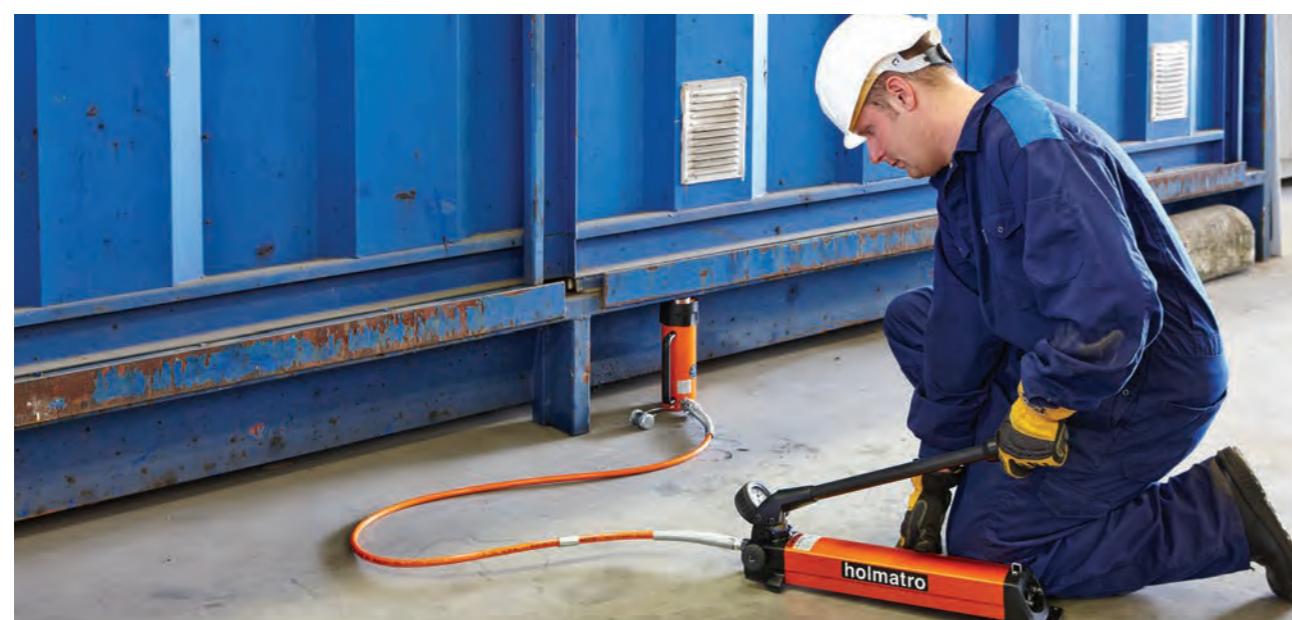


COUPLERS AND ACCESSORIES

accessories	description	model	art no
	Quick coupler, female, including aluminium dust cap • Connection: 1/4" BSP female • Fits: A 239 • Max. working pressure: 1000 bar	A 238	150.581.238
	Quick coupler, female, including aluminium dust cap • Connection: 1/4" BSP female • Fits: A 239 • Extra lock ring • Max. working pressure: 1000 bar	A 240	150.581.240
	Quick coupler, male, including aluminium dust cap • Connection: 1/4" BSP female • Fits: A 238 and A 240 • Max. working pressure: 1000 bar	A 239	150.581.239
	2 Aluminium dust caps, 1 male and 1 female • Fits: A 238, A 239 and A 240 • Max. working pressure: 1000 bar	-	150.182.010
	Pressure gauge, 0-1000 bars, including protection frame • Pressure gauge Ø 162 mm • Including quick coupler female, A 238	A 148 U	110.582.348
	Coupling piece • Including quick coupler female, A 238 (3x) • Max. working pressure: 1000 bar	A 240 U	110.582.240



PAVLÍNEK®
VÁZACÍ PROSTŘEDKY


EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

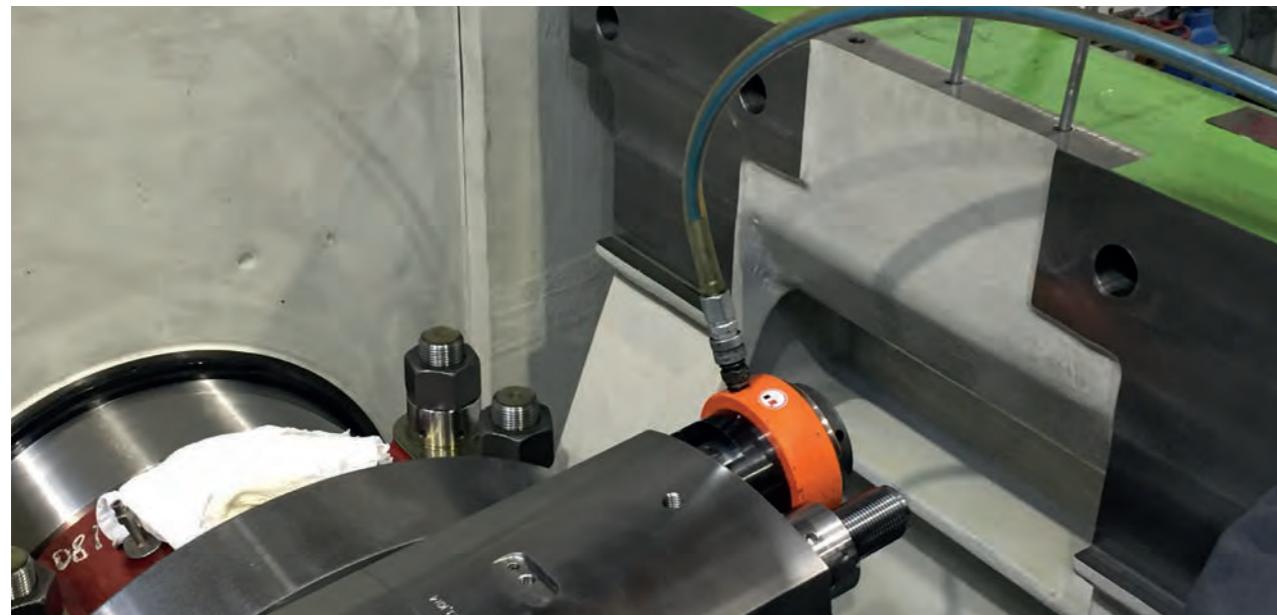

PROPELLER SET



PROPELLER CYLINDERS

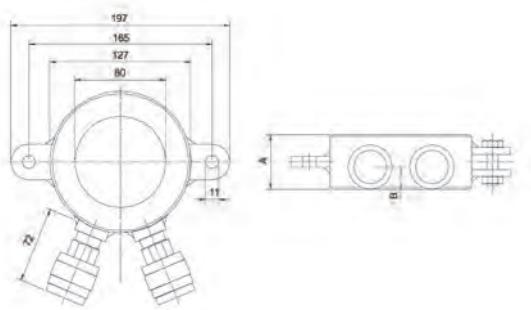


Features & benefits

- Compact
- Lightweight
- Can be adjusted to fit each propeller shaft diameter by coupling using connecting plates

Available on request

- Cylinders manufactured in conformity with customer specifications


specifications	HY 100 G 1 U	HY 100 G 3.5 U
art no	120.012.001	120.012.011
max. working pressure	bar/Mpa	2000 / 200
stroke	mm	10
capacity	kN/t	1000,5 / 102
effective pressure area	cm ²	50.27
required oil content (effective)	cc	50
connection		Y 218 (2x)
acting type		single
return type		gravity
material		steel
weight, ready for use	kg	6.0
dimension A	mm	49
dimension B	mm	25
		8.1
		85
		24

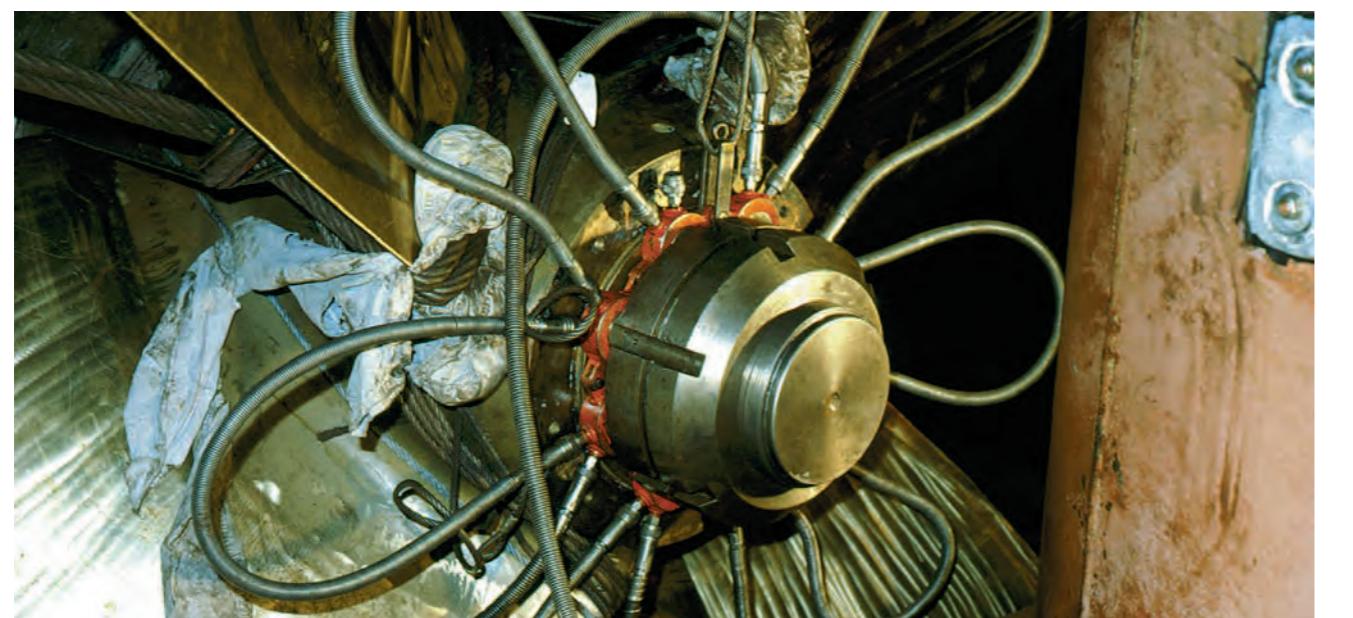

PROPELLER CYLINDERS | selection chart

Max. number of cylinders for propeller shaft

propeller shaft diameter mm	propeller shaft diameter inch	max. number of cylinders	max. available force ton	max. available force kN
200	8	7	700	6867
250	10	8	800	7848
300	12	9	900	8829
350	14	10	1000	9810
400	16	11	1100	10791
450	18	12	1200	11772
500	20	13	1300	12753
550	22	14	1400	13734
600	24	15	1500	14715
650	26	15	1500	14715
700	28	16	1600	15696
750	30	17	1700	16677
800	32	18	1800	17658
850	34	19	1900	18639
900	36	20	2000	19650
950	38	21	2100	20601
1000	40	22	2200	21583

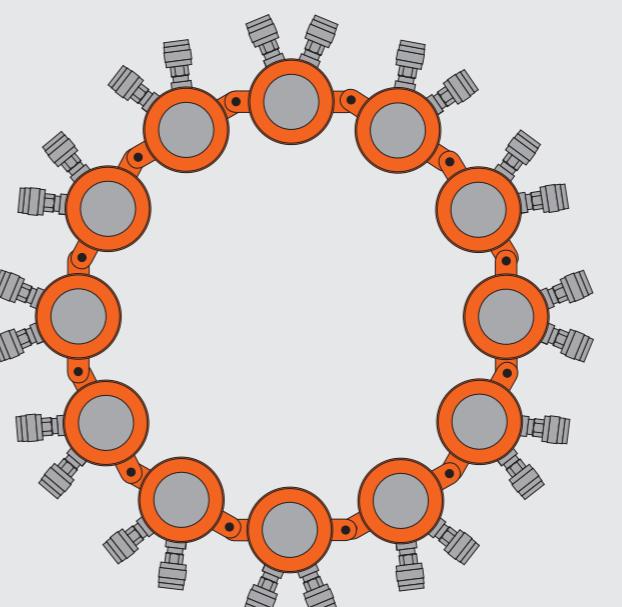

PUMP



specifications	HTWY 2300 U
art no	120.442.001
max. working pressure	bar/Mpa 2000 / 200
capacity oil tank (effective)	cc 2300
1st stage output (per stroke)	cc 31
2nd stage output (per stroke)	cc 1.6
1st stage pressure range	bar/Mpa 0-30 / 0-3
2nd stage pressure range	bar/Mpa 30-2000 / 3-200
max. operating force	kg 36.0
operator type	hand
number of tool connection	1
weight, ready for use	kg 16.0

Features & benefits

- Compact and lightweight
- Low maintenance
- Suitable for large volumes
- Automatic transition from first to second stage
- Large pomp output per stroke
- Provided with dipstick

Hydraulic hoses 125
Cougler and accessories 126

HYDRAULIC HOSES | single hoses - 2000 bars

**Features & benefits**

- 3:1 safety ratio

specifications	Y 1.5 MK	Y 3 MK	Y 5 MK
art no	120.570.002	120.570.004	120.570.005
equipped with (connection type)	single hose	single hose	single hose
max. working pressure	bar/Mpa 2000 / 200	2000 / 200	2000 / 200
color	red	red	red
hose connection A	M26 x 1.5	M26 x 1.5	M26 x 1.5
hose connection B	M26 x 1.5	M26 x 1.5	M26 x 1.5
length	m 1.5	3	5

HYDRAULIC HOSES | extension hoses - 2000 bars

**Features & benefits**

- 3:1 safety ratio

specifications	Y 1.5 MKU	Y 3 MKU	Y 5 MKU
art no	120.570.003	120.570.006	120.570.007
equipped with (connection type)	single hose	single hose	single hose
max. working pressure	bar/Mpa 2000 / 200	2000 / 200	2000 / 200
color	red	red	red
hose connection A	Y 219	Y 219	Y 219
hose connection B	Y 219	Y 219	Y 219
length	m 1.5	3	5



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



EMAIL: OBCHOD@PAVLINEK.CZ
TEL: + 420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



COUPLERS AND ACCESSORIES

accessories	description	model	art no
	Coupler, female, including steel dust cap • Connection: M22 x 1.5 male • Fits: Y 219 • Max. working pressure: 2000 bar	Y 218	120.481.218
	Coupler, male, including steel dust cap • Connection: M22 x 1.5 female • Fits: Y 218 • Max. working pressure: 2000 bar	Y 219	120.481.219
	Nipple • Connection: M26 x 1.5 female - M22 x 1.5 male • For mounting Y 219 or Y 218 on loose hose • Max. working pressure: 2000 bar	2000 bar	120.000.007
	Pressure gauge 0-2000 bar, including protection frame • Pressure gauge Ø 162 mm • Including coupler female, Y 218	Y 220 U	120.182.220
	Rotation elbow • Including coupler male, Y 219 and coupler female Y 218 • Max. working pressure: 2000 bar	Y 215 U	120.182.215
	Connecting plate • Centre to centre size: 84 mm • Max. working pressure: 2000 bar	Y 200	120.481.200
	Suspension hook • Max. working pressure: 2000 bar	Y 205	120.181.205

INDUSTRIAL SOLUTIONS



 **PAVLÍNEK®**
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511



 **PAVLÍNEK®**
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ
TEL: +420 595 693 911
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE
IČ: 25358511 DIČ: CZ25358511

