

QL.DSR / SS.QL.DSR



LOAD ANGLE CHART


α max : 90° / β max : 60°
L : Load

5:1

METRIC THREADS	Torque (Nm)	1		2		2		Asymmetric	3 → 4		Asymmetric
		L		L		L			L		
		Number of rings	Lifting angle β	Number of rings	Lifting angle β	Number of rings	Lifting angle β		Number of rings	Lifting angle β	
		1	0°	2	0°	2	0° → 45°	45° → 60°	0° → 45°	45° → 60°	
QL.DSR/SS.QL.DSR M 8	20	0,25	0°	0,50	0°	0,25	0° → 45°	0,25	0,53	0,38	0,25
QL.DSR/SS.QL.DSR M 10	30	0,40	0°	0,80	0°	0,40	0° → 45°	0,40	0,84	0,60	0,40
QL.DSR/SS.QL.DSR M 12	60	0,65	0°	1,30	0°	0,65	0° → 45°	0,65	1,37	0,98	0,65
QL.DSR/SS.QL.DSR M 14	80	0,70	0°	1,40	0°	0,70	0° → 45°	0,70	1,47	1,05	0,70
QL.DSR/SS.QL.DSR M 16	100	1,05	0°	2,10	0°	1,05	0° → 45°	1,05	2,21	1,58	1,05
QL.DSR/SS.QL.DSR M 20	160	1,70	0°	3,40	0°	1,70	0° → 45°	1,70	3,57	2,55	1,70
QL.DSR/SS.QL.DSR M 24	180	2,50	0°	5,00	0°	2,50	0° → 45°	2,50	5,25	3,75	2,50

max. load in t

Oficiální prodejce:

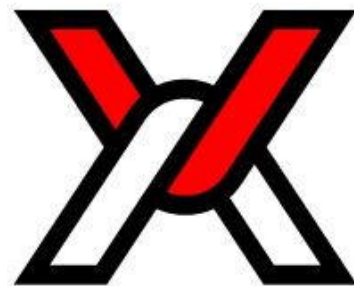

PAVLÍNEK
VÁZACÍ PROSTŘEDKY

Šalounova 746/31
703 00 Ostrava - Vítkovice
www.pavlinek.cz

Tel.: +420 595 693 911
Fax: +420 595 693 958
E-mail: obchod@pavlinek.cz