

MANUAL LIFTING MAGNET TMH 50


Oficiální prodejce:




Šalounova 746/31
703 00 Ostrava - Vítkovice
www.pavlinek.cz

Tel.: +420 595 693 911
Fax: +420 595 693 958
E-mail: obchod@pavlinek.cz

- 1 Only 1.6 kg (3.5 lbs) dead weight
- 2 Large, stable handle

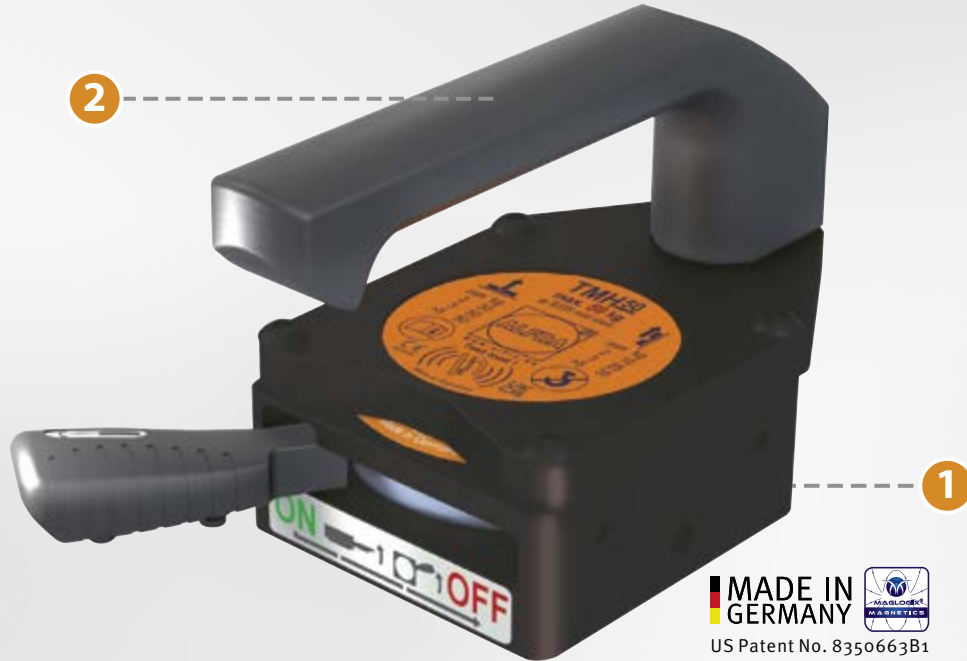

MADE IN GERMANY
US Patent No. 8350663B1

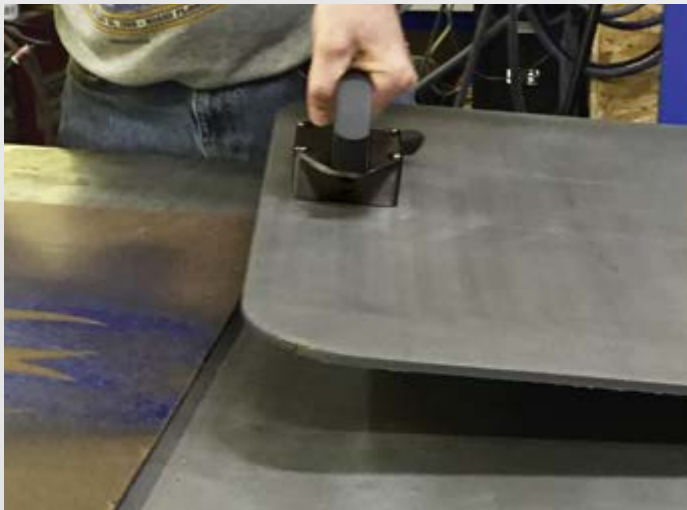

- Up to 50 kg (110 lbs) load-bearing capacity on a steel sheet S235 with a thickness of just 3 mm (1/8")
- Protects hands and fingers from hot and sharp-edged steel
- Indispensable for anyone who, e.g., has to transport welding-parts from A to B without a lifting device. (Max. temperature 60° C; 140°F)
- Wear-resistant magnetic contact area made of hardened steel with TiN-coating preventing damages and guaranteeing a long lifetime

Technical data TMH 50:

- Dead weight: 1.6 kg (3.5 lbs)
- Breakaway force: > 300 kg (660 lbs) on 6 mm (1/4") steel S235 (without adapter plate)
- Max. load-bearing capacity on flat material: 50 kg (110 lbs) (on 3 mm; 1/8" steel S235)
- Max. load-bearing capacity during vertical lifts: 35 kg (77 lbs) (on 3 mm; 1/8" steel S235)
- Length: 126 mm (4-15/16"); width: 80 mm (3-1/8"); height: 100 mm (3-15/16") (incl. lever: length 190 mm; 7-1/2", width 124 mm; 4-7/8")



VIDEO

Prod.-No.

ALFRA TMH 50

41100.H