




Premium Magnetic lifter



Features

- » Suitable for lifting and handling steel plates, -blocks or -pipes.
- » With permanent NdFeB magnet.
- » Magnetic field is produced by turning the handle.
  
- Premium features:**
- » Steel block protects the lever from shocks.
- » More stability due to fixed suspension eye.
- » Safe handling by unlocking on the housing (instead of at the lever).
  
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

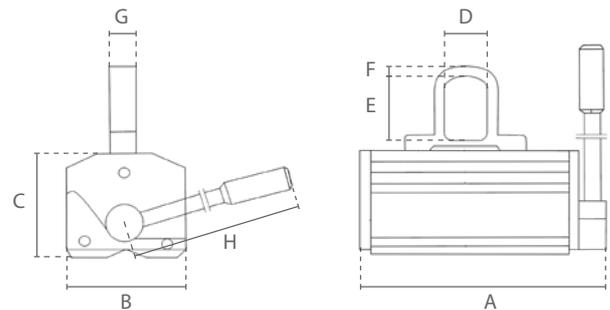

Specifications					
Article code	Capacity		Min. plate thickness	Safety factor	Net weight
	Flat material	Round material			
	ton	ton	mm		kg
DC.0.QML.0100	0,100	0,050	20	3,5	4
DC.0.QML.0300	0,300	0,150	25		11
DC.0.QML.0600	0,600	0,300	30		21
DC.0.QML.1000	1,000	0,500	40		42
DC.0.QML.2000	2,000	1,000	60		105

Dimensions (mm)								
Capacity	A	B	C	D	E	F	G	H
0,100	137	62	66	21	32	8	15	120
0,300	199	90	95	38	50	11	22	175
0,600	263	115	107	42	58	13	25	225
1,000	303	150	147	50	64	18	29	266
2,000	417	190	195	56	76	21	37	415



CE

QML vs DML

More stability due to fixed suspension eye

Movable suspension eye



Premium

DC.0.QML

SG.0.DML

Steel block protects the lever from shocks

Lever unprotected



Safe handling by unlocking on the housing



Unlocking on the lever